





## VISION

---

We strive to offer our customers the highest quality tires, the lowest cost of ownership and the utmost convenience

## MISSION

---

To be the most agile, entrepreneurial and customer-centric tire company in the world

## AMBITION

---

To be a top 3 player in the Global 'Off-Highway' tire segment

# TABLE OF CONTENTS

## SKID STEER

GALAXY MIGHTY TRAC ND L-4	12
PRIMEX BOSSMAN GRIPSTEEL II L-4+	12
GALAXY HULK L-5	12
GALAXY KING KONG L-4	12
GALAXY MUDDY BUDDY R-4	12
GALAXY TRAC STAR ND L-4	13
GALAXY BEEFY BABY III R-4	13
GALAXY BEEFY BABY R-4	13
GALAXY HIPPO R-4	14
GALAXY XD2010 R-4	14
GALAXY SKIDDO R-4	14
CONSTELLATION CST-903 R-4	15
GALAXY HULK SDS WITH APERTURES	15
GALAXY BEEFY BABY SDS	15
GALAXY SUPER SMOOTH SDS	16

## BACKHOE LOADER & CONSTRUCTION

GALAXY JUMBO HULK L-4	21
GALAXY MULTI USE 550 RADIAL R-3	21
GALAXY IND RADIAL R-4	21
GALAXY MULTI-TOUGH	21
GALAXY HIGH-LIFT RADIAL	22
GALAXY SUPER INDUSTRIAL LUG R-4	22
GALAXY EZ RIDER R-4	22
GALAXY MARATHONER R-4	23
GALAXY SUPER TRENCHER HF-3/ I-3	23
GALAXY SUPER HIGH LIFT R-1	23
GALAXY INDUSTRIAL RIB ULTRA F-3	24
GALAXY INDUSTRIAL RIB F-3	24
GALAXY SUPER INDUSTRIAL RIB F-3	24
GALAXY WORKSTAR F-3	24
CONSTELLATION CST-201	24

## OFF-THE-ROAD

GALAXY GIRAFFE XLW G-2/L-2	29
GALAXY GIRAFFE ND L-3	29
GALAXY S300 G-3	29
PRIMEX G3000 G-2	29
GALAXY MPC G-2/L-2	30
GALAXY SLG II G-2	30
GALAXY SUPER HIGH LIFT SDS	30
CONSTELLATION CST-318 E-3/L-3	30
GALAXY EXR300 ROCK LUG E-3/L-3	31
GALAXY HIPPO E-2/L-2	31
GALAXY EXCAVATOR EX1 E-2	31
GALAXY DIG MASTER E-2	31
PRIMEX SMOOTH ROLLER C-1	32
GALAXY SMOOTH COMPACTOR C-1	32
GALAXY SUPER PAVER E-7	32
GALAXY SAND RIB E-7	32
GALAXY GRADEROCK II G-3	32
GALAXY KING OF COAL L-4	33
GALAXY ROCK MINE LUG E-3	33
PRIMEX ROCK MINE LUG PLUS E-3	33
GALAXY ROCK MAX E-4 / L-4	33

GALAXY SUPER SEVERE DOUBLE WIDTH LUG E-4 / L-4	33
GALAXY SUPER SEVERE MINE L-5S	34
GALAXY LHD 500 L-5	34
GALAXY LHD 500A L-5	34
GALAXY LHD 500 SDS	34
GALAXY SUPER SMOOTH SDS	35
GALAXY MGSR G-2	35
GALAXY LDSR E-3 / L-3	35
GALAXY HTSR E-4 / L-4	35

## MATERIAL HANDLING

GALAXY SUPER GRIP E-3	39
GALAXY SUPER TRAC E-3	39
GALAXY HM300 E-3	39
GALAXY HM350E E-3.5	39
GALAXY PORT STAR E-4.5+	39
GALAXY HM450E E4.5	40
GALAXY HM400S L-4S	40
GALAXY HM-500S L-5S	40
GALAXY PORT MAX E-4	40
GALAXY TERMINAL MASTER ALL STEEL	40
GALAXY HARBOR KING L-4	41
PRIMEX HARBOURMASTER IS IND-3	41
GALAXY YARDMASTER ULTRA	41
GALAXY BOSSLIFT III IND-3	41
GALAXY YARDMASTER IND 1	42
GALAXY YARDMASTER RADIAL IND4	42
GALAXY YARDMASTER SDS RESILIENT SOLID TIRE ONLY	43
GALAXY LIFTOP SDS NON MARKING RESILIENT SOLID TIRE ONLY	43
GALAXY LIFTOP SDS LUG RESILIENT SOLID TIRE ONLY	44
GALAXY LIFTOP SDS RIB RESILIENT SOLID TIRE ONLY	44
GALAXY LIFTER SDS RESILIENT SOLID TIRE ONLY	44
GALAXY YM SDS (SMOOTH) - POB SOLID	45
GALAXY YM SDS (TR) - POB SOLID	46
GALAXY YM SDS (LUG) - POB SOLID	46

## GOLF AND TURF

GALAXY MIGHTY MOW R-3	50
GALAXY GARDEN PRO R-3+	50
GALAXY MIGHTY MOW-TS	51
GALAXY TURF SPECIAL R-3	52

## FORESTRY

PRIMEX LOGSTOMPER EXTREME	56
PRIMEX LOGMONSTER LS-2	56
PRIMEX LOGSTOMPER FX23 HF-4	56
PRIMEX LOGSTOMPER ARAMID LS-2	57

## AGRICULTURE

GALAXY EARTHPRO RADIAL R-1W	60
GALAXY 350 ROWSTAR RADIAL R-1	61
GALAXY EARTHPRO BIAS R-1	62
GALAXY EARTHPRO 45 R-1	62
GALAXY AGRI TRAC II R-1	63

GALAXY 347 BIAS R-1	63
GALAXY IRRIGATION BIAS R-1	64
GALAXY SUPER SOFT R-3	64
GALAXY RADIAL SUPER SOFTEE I-2	64
GALAXY HONEY WAGON I-3	65
GALAXY COMPACTOR R-3	65
GALAXY R-3 (329)	65
GALAXY FRONT FARM F-2M	65
GALAXY EARTHPRO F-2	65
GALAXY AG IMP I-1	66
GALAXY F-2	66
GALAXY IMPMASTER 350 FI I-1	66
GALAXY IMPMASTER 200 I-1	67
GALAXY RIB IMPLEMENT I-1	67
GALAXY RIB IMPLEMENT "STUBBLE GUARD" I-1	67
GALAXY IMPMASTER 350 I-1	68
GALAXY IMPMASTER 350 I-2	68
GALAXY STUBBLE PROOF HIGHWAY	68
GALAXY AGRI-AIR SEEDER R-3	68
GALAXY STUBBLE PROOF IMP R-3	68
GALAXY DIAMOND TREAD R3	69
NOTES:	69

## COMMERCIAL-SPECIALTY

GALAXY SPECIAL TRAILER	72
GALAXY SPECIAL TRAILER II	72
PRIMEX HWY R288	72
PRIMEX TRAILER SERVICE	72
PRIMEX R550	72
PRIMEX TRACTION LUG	73
PRIMEX STS INTERMODAL	73

## TERRA

PRIMEX TERRA TURBO II	76
PRIMEX TERRA BLASTER HF-2	76
PRIMEX IMP TRACK METRIC I-3	76
PRIMEX GEOMASTER HF-1	76

TIRE SIZE INDEX	78
-----------------	----

# TIRE PATTERN INDEX

CONSTELLATION CST-201 .....	24	GALAXY MPC G-2/L-2 .....	30
CONSTELLATION CST-318 E-3/L-3 .....	30	GALAXY MUDDY BUDDY R-4 .....	12
CONSTELLATION CST-903 R-4 .....	15	GALAXY MULTI-TOUGH .....	21
GALAXY 347 BIAS R-1 .....	63	GALAXY MULTI USE 550 RADIAL R-3 .....	21
GALAXY 350 ROWSTAR RADIAL R-1 .....	61	GALAXY PORT MAX E-4 .....	40
GALAXY AG IMP I-1 .....	66	GALAXY PORT STAR E-4.5+ .....	39
GALAXY AGRI-AIR SEEDER R-3 .....	68	GALAXY R-3 (329) .....	65
GALAXY AGRI TRAC II R-1 .....	63	GALAXY RADIAL SUPER SOFTEE I-2 .....	64
GALAXY BEEFY BABY III R-4 .....	13	GALAXY RIB IMPLEMENT I-1 .....	67
GALAXY BEEFY BABY R-4 .....	13	GALAXY RIB IMPLEMENT "STUBBLE GUARD" I-1 .....	67
GALAXY BEEFY BABY SDS .....	15	GALAXY ROCK MAX E-4 / L-4 .....	33
GALAXY BOSSLIFT III IND-3 .....	41	GALAXY ROCK MINE LUG E-3 .....	33
GALAXY COMPACTOR R-3 .....	65	GALAXY S300 G-3 .....	29
GALAXY DIAMOND TREAD R3 .....	69	GALAXY SAND RIB E-7 .....	32
GALAXY DIG MASTER E-2 .....	31	GALAXY SKIDDO R-4 .....	14
GALAXY EARTHPRO 45 R-1 .....	62	GALAXY SLG II G-2 .....	30
GALAXY EARTHPRO BIAS R-1 .....	62	GALAXY SMOOTH COMPACTOR C-1 .....	32
GALAXY EARTHPRO F-2 .....	65	GALAXY SPECIAL TRAILER .....	72
GALAXY EARTHPRO RADIAL R-1W .....	60	GALAXY SPECIAL TRAILER II .....	72
GALAXY EXCAVATOR EX1 E-2 .....	31	GALAXY STUBBLE PROOF HIGHWAY .....	68
GALAXY EXR300 ROCK LUG E-3/L-3 .....	31	GALAXY STUBBLE PROOF IMP R-3 .....	68
GALAXY EZ RIDER R-4 .....	22	GALAXY SUPER GRIP E-3 .....	39
GALAXY F-2 .....	66	GALAXY SUPER HIGH LIFT R-1 .....	23
GALAXY FRONT FARM F-2M .....	65	GALAXY SUPER HIGH LIFT SDS .....	30
GALAXY GARDEN PRO R-3+ .....	50	GALAXY SUPER INDUSTRIAL LUG R-4 .....	22
GALAXY GIRAFFE ND L-3 .....	29	GALAXY SUPER INDUSTRIAL RIB F-3 .....	24
GALAXY GIRAFFE XLW G-2/L-2 .....	29	GALAXY SUPER PAVER E-7 .....	32
GALAXY GRADEROCK II G-3 .....	32	GALAXY SUPER SEVERE DOUBLE WIDTH LUG E-4 / L-4 .....	33
GALAXY HARBOR KING L-4 .....	41	GALAXY SUPER SEVERE MINE L-5S .....	34
GALAXY HIGH-LIFT RADIAL .....	22	GALAXY SUPER SMOOTH SDS .....	16
GALAXY HIPPO E-2/L-2 .....	31	GALAXY SUPER SMOOTH SDS .....	35
GALAXY HIPPO R-4 .....	14	GALAXY SUPER SOFT R-3 .....	64
GALAXY HM300 E-3 .....	39	GALAXY SUPER TRAC E-3 .....	39
GALAXY HM350E E-3.5 .....	39	GALAXY SUPER TRENCHER HF-3/ I-3 .....	23
GALAXY HM400S L-4S .....	40	GALAXY TERMINAL MASTER ALL STEEL .....	40
GALAXY HM450E E4.5 .....	40	GALAXY TRAC STAR ND L-4 .....	13
GALAXY HM-500S L-5S .....	40	GALAXY TURF SPECIAL R-3 .....	52
GALAXY HONEY WAGON I-3 .....	65	GALAXY WORKSTAR F-3 .....	24
GALAXY HTSR E-4 / L-4 .....	35	GALAXY XD2010 R-4 .....	14
GALAXY HULK L-5 .....	12	GALAXY YARDMASTER IND 1 .....	42
GALAXY HULK SDS WITH APERTURES .....	15	GALAXY YARDMASTER RADIAL IND4 .....	42
GALAXY IMPMASTER 200 I-1 .....	67	GALAXY YARDMASTER SDS - RESILIENT SOLID TIRE ONLY .....	43
GALAXY IMPMASTER 350 FI I-1 .....	66	GALAXY YARDMASTER ULTRA IND-1 / IND-3 .....	41
GALAXY IMPMASTER 350 I-1 .....	68	GALAXY YM SDS (LUG) - POB SOLID .....	46
GALAXY IMPMASTER 350 I-2 .....	68	GALAXY YM SDS (SMOOTH) - POB SOLID .....	45
GALAXY IND RADIAL R-4 .....	21	GALAXY YM SDS (TR) - POB SOLID .....	46
GALAXY INDUSTRIAL RIB F-3 .....	24	PRIMEX BOSSMAN GRIPSTEEL II L-4+ .....	12
GALAXY INDUSTRIAL RIB ULTRA F-3 .....	24	PRIMEX G3000 G-2 .....	29
GALAXY IRRIGATION BIAS R-1 .....	64	PRIMEX GEOMASTER HF-1 .....	76
GALAXY JUMBO HULK L-4 .....	21	PRIMEX HARBORMASTER IS IND-3 .....	41
GALAXY KING KONG L-4 .....	12	PRIMEX HWY R288 .....	72
GALAXY KING OF COAL L-4 .....	33	PRIMEX IMP TRACK METRIC I-3 .....	76
GALAXY LDSR E-3 / L-3 .....	35	PRIMEX LOGMONSTER LS-2 .....	56
GALAXY LHD 500A L-5 .....	34	PRIMEX LOGSTOMPER ARAMID LS-2 .....	57
GALAXY LHD 500 L-5 .....	34	PRIMEX LOGSTOMPER EXTREME .....	56
GALAXY LHD 500 SDS .....	34	PRIMEX LOGSTOMPER FX23 HF-4 .....	56
GALAXY LIFTER SDS - RESILIENT SOLID TIRE ONLY .....	44	PRIMEX R550 .....	72
GALAXY LIFTOP SDS LUG - RESILIENT SOLID TIRE ONLY .....	44	PRIMEX ROCK MINE LUG PLUS E-3 .....	33
GALAXY LIFTOP SDS NON-MARKING - RESILIENT SOLID TIRE ONLY .....	43	PRIMEX SMOOTH ROLLER C-1 .....	32
GALAXY LIFTOP SDS RIB - RESILIENT SOLID TIRE ONLY .....	44	PRIMEX STS INTERMODAL .....	73
GALAXY MARATHONER R-4 .....	23	PRIMEX TERRA BLASTER HF-2 .....	76
GALAXY MGSR G-2 .....	35	PRIMEX TERRA TURBO II .....	76
GALAXY MIGHTY MOW R-3 .....	50	PRIMEX TRACTION LUG .....	73
GALAXY MIGHTY MOW-TS .....	51	PRIMEX TRAILER SERVICE .....	72
GALAXY MIGHTY TRAC ND L-4 .....	12		

# REFERENCE TABLES

## SPEED CATEGORY

Speed Symbol	Speed (mph)	Speed (km/h)
A1	3	5
A2	5	10
A3	10	15
A4	12	20
A5	15	25
A6	20	30
A7	22	35
A8	25	40
B	30	50
C	35	60
D	40	65
E	43	70
F	50	80
G	55	90
J	62	100
K	68	110

## LOAD INDEX

LOAD INDEX	LBS.	KG.	LOAD INDEX	LBS.	KG.	LOAD INDEX	LBS.	KG.	LOAD INDEX	LBS.	KG.
70	740	335	111	2400	1090	152	7850	3550	193	25400	11500
71	760	345	112	2470	1120	153	8050	3650	194	26000	11800
72	785	355	113	2540	1150	154	8250	3750	195	26800	12450
73	805	365	114	2600	1180	155	8550	3875	196	27600	12500
74	825	375	115	2680	1215	156	8800	4000	197	28300	12850
75	855	387	116	2760	1250	157	9100	4125	198	29100	13200
76	880	400	117	2830	1285	158	9350	4250	199	30000	13600
77	910	412	118	2910	1320	159	9650	4375	200	30900	14000
78	935	425	119	3000	1360	160	9900	4500	201	32000	14500
79	965	437	120	3080	1400	161	10200	4625	202	33100	15000
80	990	450	121	3200	1450	162	10500	4750	203	34200	15500
81	1020	462	122	3300	1500	163	10700	4875	204	35300	16000
82	1050	475	123	3420	1550	164	11000	5000	205	36400	16500
83	1070	487	124	3520	1600	165	11400	5150	206	37500	17000
84	1100	500	125	3640	1650	166	11700	5300	207	38600	17500
85	1140	515	126	3740	1700	167	12000	5450	208	39700	18000
86	1170	530	127	3860	1750	168	12300	5600	209	40800	18500
87	1200	545	128	3960	1800	169	12800	5800	210	41900	19000
88	1230	560	129	4080	1850	170	13200	6000	211	43000	19500
89	1280	580	130	4180	1900	171	13600	6150	212	44100	20000
90	1320	600	131	4300	1950	172	13900	6300	213	45400	20600
91	1360	615	132	4400	2000	173	14300	6500	214	46700	21200
92	1390	630	133	4540	2060	174	14800	6700	215	48100	21800
93	1430	650	134	4680	2120	175	15200	6900	216	49400	22400
94	1480	670	135	4800	2180	176	15700	7100	217	50700	23000
95	1520	690	136	4940	2240	177	16100	7300	218	52000	23600
96	1570	710	137	5080	2300	178	16500	7500	219	53600	24300
97	1610	730	138	5200	2360	179	17100	7750	220	55100	25000
98	1650	750	139	5360	2430	180	17600	8000	221	56800	25750
99	1710	775	140	5520	2500	181	18200	8250	222	58400	26500
100	1760	800	141	5680	2575	182	18700	8500	223	60000	27250
101	1820	825	142	5840	2650	183	19300	8750	224	61500	28000
102	1870	850	143	6000	2725	184	19800	9000	225	64000	29000
103	1930	875	144	6150	2800	185	20400	9250	226	66000	30000
104	1980	900	145	6400	2900	186	20900	9500	227	68000	30750
105	2040	925	146	6600	3000	187	21500	9750	228	69500	31500
106	2090	950	147	6800	3075	188	22000	10000	229	71500	32500
107	2150	975	148	6950	3150	189	22700	10300	230	74000	33500
108	2200	1000	149	7150	3250	190	23400	10600	231	76000	34500
109	2270	1030	150	7400	3350	191	24000	10900	232	78500	35500
110	2340	1060	151	7600	3450	192	24700	11200	233	80500	36500

## LOAD RANGE

LOAD RANGE	PLY RATING
A	2
B	4
C	6
D	8
E	10
F	12
G	14
H	16
J	18
L	20
M	22
N	24

## TIRE COMPARISONS

SIZE (MM)	SIZE (IN)
215	8.5
230	9.5
250 / 260	10.0
265	10.5
280 / 290	11.2
320	12.4
340	13.6
355 / 360	14.0
380 / 385	14.9
400 / 405	16.0
420	16.9
445	17.5
460 / 480	18.4
500	19.5
520 / 540	20.8
600	23.1
620 / 650	24.5
710	28.0
800	30.5
900	35.5
1050	43.0
1250	50.0

## ROLLING CIRCUMFERENCE INDEX (RCI) NUMBERS

RCI Index	Rolling Circ (in.)	Rev/ Mile	RCI Index	Rolling Circ (in.)	Rev/ Mile	RCI Index	Rolling Circ (in.)	Rev/ Mile	RCI Index	Rolling Circ (in.)	Rev/ Mile
0	20	3219	15	43	1470	30	95	669	45	207	305
1	21	3065	16	45	1393	31	100	636	46	219	209
2	22	2900	17	48	1325	32	105	603	47	230	275
3	23	2751	18	51	1252	33	111	573	48	243	261
4	24	2617	19	53	1192	34	117	543	49	256	248
5	26	2476	20	56	1129	35	123	516	50	269	235
6	27	2349	21	59	1073	36	130	489	51	284	223
7	28	2335	22	62	1019	37	136	464	52	299	212
8	30	2118	23	66	967	38	144	440	53	315	201
9	31	2012	24	69	917	39	152	418	54	332	191
10	33	1905	25	73	870	40	160	397	55	350	181
11	35	1808	26	77	825	41	168	376	56	369	172
12	37	1721	27	81	783	42	177	357	57	389	163
13	39	1634	28	85	743	43	187	339			
14	41	1547	29	90	706	44	197	322			

## ABBREVIATIONS AND DEFINITIONS

TIRE TREAD CODE DEFINITIONS	
F	Front Steer
I	Implement
R	Rear Traction
HF	High Flotation
C	Compactor
E	Earthmover
G	Grader
L	Loader and Dozer
IND	Industrial

OTHER DESIGNATIONS AND DEFINITIONS	
NHS	Not for highway service
SL	Service limited to Agricultural use
FI	Implement tire, towed highway service
ST	Special tires for trailer in highway service
ML	Mining and logging intermittent highway service
IF	20% higher load at the same inflation
VF	40% higher load at the same inflation

TREAD DEPTH CLASSIFICATION	
TRA Code	Depth
2/3 - Regular Tread	100%
4 - Deep Tread	150%
5 - Extra Deep Tread	250%
6 - Extra Deep tread	280-300%

MAXIMUM		
TRA CODE	SPEED	DISTANCE (ONE WAY)
C	6mph (10km/h)	No limit
E	40mph (65km/h)	2.5 mi (4 km)
G	25mph (40km/h)	No limit
L	6mph (10km/h)	250 ft (76m)

## TIRE TYPE NOMENCLATURE

F-1	Agricultural Single Rib Tread
F-2	Agricultural 3-Rib Tread
F-2M	Agricultural 4-Rib Tread
F-3	Agricultural Highway Tread
I-1	Rib Tread
I-2	Moderate Tread
I-3	Traction Tread
R-1	Drive Wheel, Regular tread
R-1W	Drive Wheel, Wet Traction Tread
R-2	Drive Wheel, Cane & Rice, Deep
R-3	Drive Wheel, Shallow Tread

R-4	Drive Wheel, Industrial Tractor Tread
HF-1	Shallow Tread
HF-2	Regular Lug Tread
HF-3	Deep Lug Tread
HF-4	Extra Deep Tread
E-2	Traction Regular Tread
E-3	Rock Regular Tread
E-4	Rock Deep Tread
E-7	Flotation Tread
L-2	Traction Regular Tread
L-3	Rock Regular Tread
L-4	Rock Deep Tread

L-5	Rock Extra Deep Tread
L-6	Rock Extra Deep Tread
L-4S	Smooth Deep Tread
L-5S	Smooth Extra Deep Tread
L-6S	Smooth Extra Deep Tread
G-2	Traction Regular Tread
G-3	Rock Regular Tread
C-1	Smooth Tread

## RCI CHART

RCI	APPROX RC		SECTION WIDTH (mm)																		
	RC(mm)	RC(in)	230	270	320	340	380	420	440	480	520	540	560	580	600	620	650	710	750	800	900
49	6495	255.7					105R54			95R50								85R38 75R42			75R32
48	6165	242.7			105R54		90R54 105R50	95R50		80R50	85R46			85R42				70R42		70R38	60R38
47	5850	230.3	115R54	95R54 105R54	90R54 105R50					80R46	85R42				70R42	65R42	70R38 75R34		70R32		
46	5550	218.5			90R50 105R46 85R48	85R48	90R46			80R42	85R38				75R34	65R38	60R42		65R32	60R32	
45	5270	207.5		95R48	90R46		90R46			80R38					65R38		75R32	60R38		60R32	
44	5000	196.9	95R48				95R38					65R38			65R34	75R30	65R34 75R30 65R30.5		60R30.5		
43	4745	186.8					80R38	85R34		70R34		65R34			70R30 60R30.5	75R26	65R26.5	50R30.5			
42	4505	177.4					85R34	90R30				65R30			65R30 70R28 65R28	70R26					
41	4275	168.3					85R30	85R28			80R26	65R28			60R30 60R28			50R26.5			
40	4055	159.6													55R26.5		55R26.5		45R26.5		
39	3850	151.6							65R28	65R28		65R24							45R22.5		
38	3655	143.9							65R24	65R24			60R22.5		50R22.5						
37	3465	136.4						65R24													
36	3290	129.5											45R22.5								
35	3120	122.8						65R20													




# ABOUT YOKOHAMA OHT

Yokohama Off-Highway Tires, Inc. (Yokohama OHT), a subsidiary of Yokohama Rubber Corporation, is one of the fastest-growing manufacturers of off-highway tires in the world. With its Yokohama, Alliance, Galaxy and Primex brands, Yokohama OHT specializes in developing products for the agriculture, forestry, construction, industrial and off-the-road (OTR) markets worldwide. With more than 2,600 SKUs, the company has one of the largest and most diverse product line-ups in the business.

As a major global supplier for some of the world's most trusted equipment manufacturers—including CNH, John Deere, AGCO, Caterpillar and Bobcat—Yokohama OHT has earned positions on more than 350 OE fitments. From high-performance tires for the fastest and heaviest farm machinery to rugged skid steer and backhoe tires, Yokohama OHT has purpose-built a tire for any task around the farm and job site.

The Yokohama OHT global R&D team spans three continents and maintains constant contact with customers in the field. World class engineers collaborate closely with farmers and equipment companies every day, developing and refining new tires to push the envelope and deliver outstanding performance in any condition. Yokohama OHT remains at the cutting edge of tire technology, from IF/VF tires to fast flotation and high-performance tread patterns. Backed by warehouses coast to coast and a nationwide network of distributors and dealers, Yokohama OHT delivers dependable farm, forestry and OTR tires that are engineered to keep you ahead.

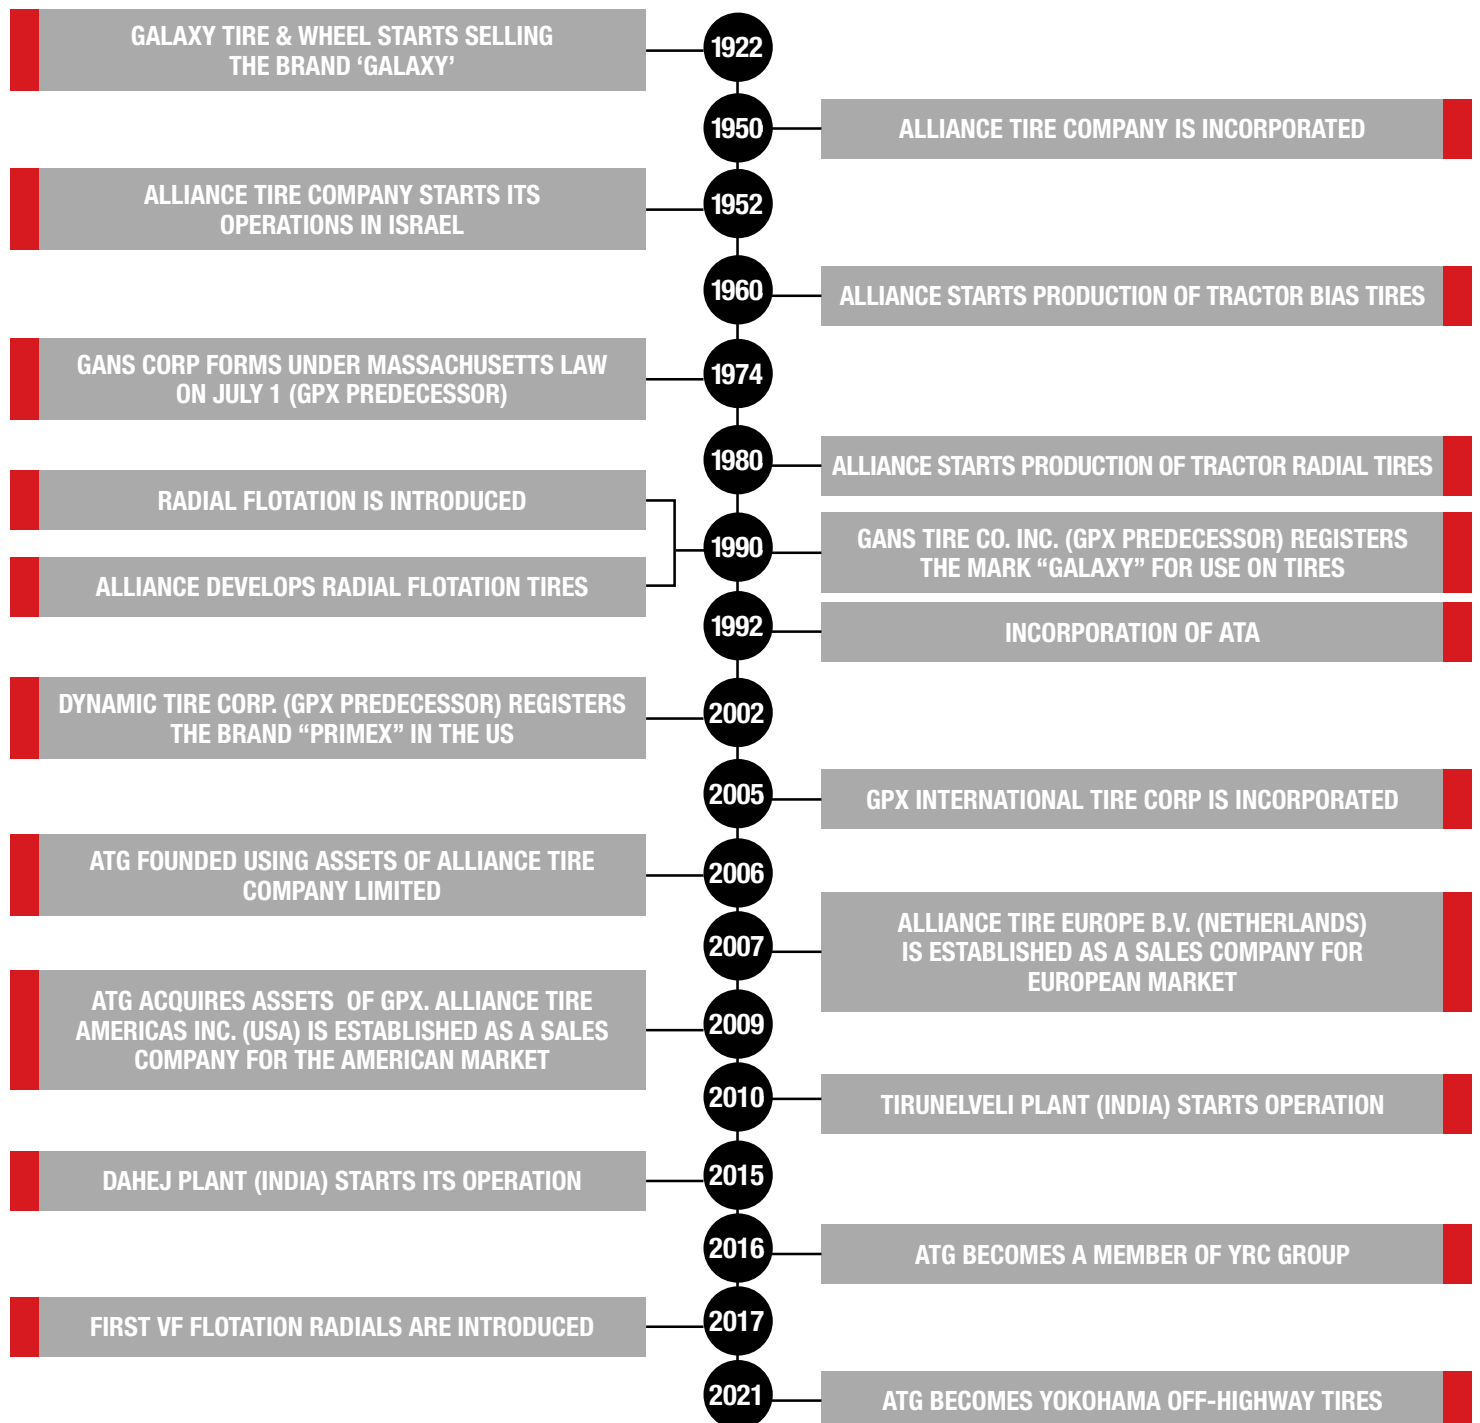

# **SKID STEER**

## **INNOVATIVE DESIGNS FOR A WIDE RANGE OF APPLICATIONS**

Skid steers put even the toughest tires to the test. From massive block treads that deliver long-lasting service on hard surfaces to aggressive lugs that tackle slick conditions, Galaxy delivers skid steer tires purpose-built for any challenge. And with special construction features like heavy-duty rim guards, reinforced sidewalls and steel reinforced carcasses, Galaxy takes skid steer tires to a whole new level.







**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

# MAJOR APPLICATIONS OF SKID STEER

## CONDITIONS

### SEVERE DUTY SOLIDS

- Demolition/Construction Sites
- Metal Scrapyards
- Glass Recycling

### SEVERE DUTY PNEUMATICS

- Hard Abrasive Yards
- Garbage Scrapyards
- Recycling Facilities

### HEAVY DUTY PNEUMATICS

- Rubble Removal
- Construction
- Municipality Works

### STANDARD DUTY PNEUMATICS

- Agriculture
- Construction
- Municipality Works

### SPECIALITY HEAVY DUTY PNEUMATICS

- Construction
- Agriculture
- Snow removal



^Multipurpose Pattern indicates that in addition to working in the above mentioned applications this pattern can be used even at construction sites, dairy farms etc



REQUIREMENTS	SOLUTIONS	OUR OFFERING		
--------------	-----------	--------------	--	--

- Resist penetrating debris
- Abrasion resistance
- Zero downtime due to punctures and cuts

- Solid construction
- High tread depth
- Three times life of a pneumatic tire/rim assembly provided



**HULK SDS**  
Industry Leading Tread Depth



**SUPER SMOOTH SDS**  
Maximized Usable Rubber Volume



**BEEFY BABY SDS**  
Traction Multi-purpose Pattern

- Abrasion resistance
- Resist failure due to cuts and chipping
- Minimum downtime/maximum life

- High solid to void ratio
- Strong sidewall and tread construction
- High tread depth



**BOSSMAN GRIPSTEEL II**  
Steel Belted



**HULK**  
Maximum Tread Depth



**KING KONG**  
Super Severe Mine Compound

- Multi-purpose multi-shift operations by same equipment
- Work on hard surfaces/mud/slopes

- Beefy lug pattern
- Wide center tread with large lug overlap



**BEEFY BABY III**  
Higher Tread Depth



**BEEFY BABY**  
OEM Preference

- Multi-purpose operations
- Value for money offering

- Specialized lug pattern
- Optimal tread depth and design



**XD 2010**  
Cascaded Lug Pattern

- Multi-purpose operations
- Built for specific end-user applications



**550 MULTI-USE**  
Maximized footprint and superior ride



**HIPPO**  
Flotation in soft soil and mud



**MUDDY BUDDY**  
High traction in soft soil and mud



**MIGHTY TRAC ND**  
All-season/all-surface tread



**MIGHTY MOW**  
Gentle performance for turf applications

= Solid
  = Pneumatic
  = Radial

## GALAXY MIGHTY TRAC ND L-4

The Mighty Trac ND is the all-season, all-surface specialist. It's unique block-type tread gives your skid steer just as much traction and performance in reverse as it does in forward; every aspect of the lug pattern is designed to make sure your wheels aren't spinning.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
148260	10-16.5		10	TL	38	8.25	31.4	10.2	92	14.4	3500	40	5
148266	12-16.5		12	TL	43	9.75	33	12.1	98	15.1	4220	40	5
148378	14-17.5		14	TL	50	10.5	36.3	13.7	108	16.5	8540	80	5

## PRIMEX BOSSMAN GRIPSTEEL II L-4+

The Primex Bossman Gripsteel II is a steel belt reinforced severe service tire for industry-leading tread stability and penetration resistance. The tire is designed with extra-deep tread and a large center block which helps it to resist skid wear.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
138261	10-16.5		12	TL	34	8.25	30.2	10.3	92	13.9	3500	45	5
138267	12-16.5		14	TL	44	9.75	33.9	12.2	101	15.1	4220	40	5

## GALAXY HULK L-5

**OEM FITMENT**

The Galaxy Hulk has a unique tread pattern that allows it to operate in severe applications while providing superior self cleaning. The Hulk has a minimum tread depth of 44/32nds and a lug-to-void ratio of 68:32. As a result the Hulk will provide long wear and reduce downtime caused by cuts and punctures. It is also built with special cut and chip resistant compounds for durability.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
133260	10-16.5		10	TL	44	8.25	31.4	10.2	92	14.4	3500	45	5
133266	12-16.5		12	TL	44	9.75	33	12.1	96	15.1	4220	40	5
133273	33X15.50-16.5		14	TL	44	12	33.1	15.1	100	15.1	4800	35	5
133278	14-17.5		14	TL	46	10.5	36.8	14.1	108	16.8	8550	80	5

## GALAXY KING KONG L-4

**OEM FITMENT**

The Galaxy King Kong L-4 is one of the strongest and most durable skid steer tires on the market. The King Kong has a tread depth of 40/32nds and a 3.5 inch wide lug, and is purpose built for hard surface and rough concrete operations. It is also built with special cut and chip resistant compounds for durability.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
132260	10-16.5		10	TL	40	8.25	30.9	10.2	95	14.2	3500	45	5
132266	12-16.5		12	TL	40	9.75	32.7	11.6	100	15	4220	40	5

## GALAXY MUDDY BUDDY R-4

**OEM FITMENT**

The Galaxy Muddy Buddy is a new skid steer tire with a super deep R-4 tread. The Muddy Buddy has 55% deeper tread than conventional R-4 skid steer tires which results in longer wear on rough concrete and makes it ideal for use on soft soil where high traction is required.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
144259	10-16.5		8	TL	42	8.25	30.7	10	91	13.9	3500	45	5
144264	12-16.5		10	TL	45	9.75	32.7	11.9	96	14.7	4220	40	5
144278	14-17.5		12	TL	46	10.5	36.3	13.7	107.5	16.5	8540	80	5

## GALAXY TRAC STAR ND L-4

The Galaxy Trac Star ND has a special tread design enabling the tire to be used in multiple applications. The deep tread pattern gives exceptional wear on hard surfaces like rock and concrete. Its rounded shoulders and large footprint allow the tire to be used on soft ground and turf.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
146260	10-16.5		10	TL	38	8.25	31.4	10.2	92	14.4	3500	45	5
146266	12-16.5		12	TL	42	9.75	33	12.1	96	15.1	4220	40	5

## GALAXY BEEFY BABY III R-4

OEM FITMENT

The Galaxy Beefy Baby III has an advanced new design with almost 10% deeper tread than its predecessor, the Beefy Baby II. It has a flatter tread profile due to the tread overlap and the amount of rubber in the center of the tread. The shallower angle of the lug in the shoulder provides increased traction and the terracing between the lugs promotes self cleaning. Galaxy's signature rim shield has also been enhanced in the Beefy Baby III design.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
112072	26x12D380		8	TL	23	10	26.5	11.9	79.1	12.2	3080	42	5
112259	10-16.5		8	TL	26	8.25	30.9	10.2	92	14.2	3500	45	5
112260	10-16.5		10	TL	26	8.25	30.9	10.2	92	14.2	3500	45	5
112264	12-16.5		10	TL	28	9.75	32.6	11.8	94	14.6	4220	40	5
112266	12-16.5		12	TL	28	9.75	32.7	12	95.4	14.8	4220	40	5
112301	315/55D20		12	TL	25	11	32.8	12.5	97.9	15.2	7600	80	5
112273	33X15.50-16.5		14	TL	25	12	33.9	15.4	101.3	15.5	7400	80	5
112276	14-17.5		10	TL	30	10.5	36.3	13.7	107.5	16.5	6850	55	5
112278	14-17.5		14	TL	30	10.5	36.3	13.7	107.5	16.5	8540	80	5
112300	355/55D625		14	TL	25	11.75	37.1	13.9	114	17.4	9100	75	5
112297	15-19.5		14	TL	31.5	11.75	40.1	15.3	125.6	18.2	9920	70	5
112254	15-19.5		16	TL	31.5	11.75	40.1	15.3	118.5	17.4	10745	80	5
112296	15-625		16	TL	25	13	40.4	15.4	123.6	18.9	12300	100	5
112307	18-625		16	TL	28	15	41.4	17.1	125.2	19.3	15200	100	5
112924	445/50D710		18	TL	30	15	46.6	17.1	141.5	21.5	16100	100	5

## GALAXY BEEFY BABY R-4

OEM FITMENT

Machinery owners, renters, dealers, and OEMs alike agree that the Galaxy Beefy Baby R4 is one of the "beefiest" and best performing R-4 design skid steer tire on the market, making it the standard by which all other skid steer tires are measured. This hard-won reputation was earned over many years of service thanks to the Beefy Baby's durable wear resistant compound, superior tread design, super sidewall, and rim shield protector.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
100259	10-16.5		8	TL	24	8.25	31.1	10.4	93	14.4	3500	45	5
100260	10-16.5		10	TL	24	8.25	31.1	10.4	93	14.4	3500	45	5
100264	12-16.5		10	TL	26	9.75	32.8	12.2	97	15.1	4220	40	5
100276	14-17.5		10	TL	28	10.5	36.7	13.5	108	16.8	6850	55	5
100278	14-17.5		14	TL	28	10.5	36.7	13.5	108	16.8	8540	80	5
100285	10.5/80-18		10	TL	32	9	36.5	10.8	108	16.6	4300	54	25
100287	12.5/80-18		10	TL	35	9	38.9	12	117	17.7	3750	45	25
100289	12.5/80-18		14	TL	35	9	39.3	12.1	118	17.8	4400	48	25
100297	15-19.5		14	TL	29	11.75	38.7	15.7	117	17.7	10060	70	5
100897	15-22.5		12	TL	32	11.75	42.9	15.2	122.8	19.4	9650	70	5
100896	15-22.5		16	TL	32	11.75	42.9	15.2	125	19.6	14151	112	5
100372	15-22.5		20	TL	32	11.75	42.9	15.2	122.8	19.4	13600	105	5
100374	18-22.5		18	TL	34	12.25	46.1	17.8	132.2	20	9480	75	5



## GALAXY HIPPO R-4

OEM FITMENT

The Galaxy Hippo R-4 is designed for performance in soft and wet soil conditions. The tires are designed for operation in conditions where extra flotation is required and, in many cases can eliminate the need for expensive and cumbersome tracks.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
130174	31X15.50-15		8	TL	23	13	31	15.2	95	14.4	4540	40	5
130270	31.5X13.00-16.5		10	TL	24	9.75	31.5	12.8	95	14.4	3640	30	5
130272	33X15.50-16.5		12	TL	26	12	32.6	15.2	96	14.6	4940	35	5

## GALAXY XD2010 R-4

OEM FITMENT

The Galaxy XD 2010 has a solid center for long, even wear on hard surfaces. The deep, open shoulders are designed for traction off-road, and are made with a highly abrasion resistant tread compound. The tire features a heavy sidewall and rim guard. The casing was designed with a neutral contour, which means that the uninflated and inflated shapes are virtually identical. This results in minimum distortion and stresses on the inflated tire, which enhances both reliability and tread wear. The XD 2010 is also widely used by many original equipment manufacturers.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
111026	570-12		4	TL	16.4	5JA	22.4	5.9	69.7	10.6	1450	60	5
111833	23x850-12		8	TL	16	7JA	22.6	8.4	65.9	10.2	2105	65	5
111858	23x850-12		12	TL	16	7JA	22.6	8.4	65.9	10.2	2756	100	5
111142	27X850-15		8	TL	16	9.75	32.3	11.6	79.6	15	4800	49	5
111152	27x1050-15		8	TL	18	8	27.2	10.2	80.9	12.6	3080	60	5
111258	10-16.5		6	TL	22	8.25	30.3	10	90	14	3500	45	5
111259	10-16.5		8	TL	22	8.25	30.3	10	90	14	3500	45	5
111260	10-16.5		10	TL	22	8.25	30.3	10	90	14	3500	45	5
111254	12-16.5		6	TL	22	9.75	32.3	11.6	97	15	4220	40	5
111264	12-16.5		10	TL	22	9.75	32.3	11.6	97	15	4220	40	5
111266	12-16.5		12	TL	22	9.75	32.3	11.6	97	15	4220	40	5
111273	33x1550-16.5		14	TL	22	12	33	15.5	95.6	14.8	7480	70	5
111276	14-17.5		10	TL	24	10.5	36.3	13.7	109.1	16.5	6845	55	5
111278	14-17.5		14	TL	24	10.5	36.3	13.7	109.1	16.5	8540	80	5
111297	15-19.5		14	TL	27	11.75	40.1	15.3	120.8	18.3	10064	70	5

## GALAXY SKIDDO R-4

The Galaxy Skiddo is a specialized tire developed for skid steer applications. The deep, open shoulders are designed for traction on loose off-road surfaces. The flatter profile of the tire improves wear resistance. The grooves between the lugs result in excellent self cleaning.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
113259	10-16.5		8	TL	18	8.25	30.7	10.2	93	14	3500	45	5
113260	10-16.5		10	TL	18	8.25	30.4	10.2	92.6	14	3500	45	5
113264	12-16.5		10	TL	21	9.75	32.7	12.1	98.8	15	4220	40	5
113266	12-16.5		12	TL	21	9.75	32.7	12.1	98.8	15	4220	40	5

## CONSTELLATION CST-903 R-4

The Constellation CST-903 is a specialized tire developed for Skid Steer application. The open and deep shoulders are designed for traction on loose off-road surfaces. The flatter radius of the tire improves the wear resistance. Solid center lug for improved wear resistance. Rim Shield Protector on sidewall for shock protection



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
290260	10-16.5		10	TL	18	8.25	30.4	10.2	92.6	14	3500	45	5
290266	12-16.5		12	TL	21	9.75	32.7	12.1	98.8	15	4220	40	5

## GALAXY HULK SDS WITH APERTURES



The Galaxy Hulk SDS is extra deep sturdy block pattern which has high solid to void pattern with large central block for long tread wear. Its solid construction eliminates punctures, ensuring maximum uptime and steel wire creel beads prevent rim slippage. It is available with tire + rim assembly (Lock ring/standard heel type) for quick change of tire. Hulk SDS gives maximum tread depth available to provide extended tire life with lowest cost of ownership in the most severe application.



TYPE	PRODUCT CODE	SIZE	ALT. SIZE	SIDE	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
W/ APERTURE TIRE ONLY	583717	30X10-16	10-16.5	Left	Solid Tire	75	6	30.2	9.5			8085	N/A	5
	583718	30X10-16	10-16.5	Right	Solid Tire	75	6	30.2	9.5			8085	N/A	5
	583719	33x12-16	12-16.5	Left	Solid Tire	80	8	32.7	10.9			10420	N/A	5
	583720	33x12-16	12-16.5	Right	Solid Tire	80	8	32.7	10.9			10420	N/A	5
W/ APERTURE ASSEMBLY	589717	30X10-16	10-16.5	Left	8 ON 8	75	6	30.2	9.5			8085	N/A	5
	589718	30X10-16	10-16.5	Right	8 ON 8	75	6	30.2	9.5			8085	N/A	5
	589719	33x12-16	12-16.5	Left	8 ON 8	80	8	32.7	10.9			10420	N/A	5
	589720	33x12-16	12-16.5	Right	8 ON 8	80	8	32.7	10.9			10420	N/A	5

## GALAXY BEEFY BABY SDS



The Galaxy Beefy Baby Severe Duty Solid is the ideal tire to deliver productivity in harsh environments like waste transfer stations, metal recycling, construction, and demolition sites. The SDS offers up to 40% higher carrying capacity than a pneumatic tire and the confidence of being virtually immune to flats. It is available with tire + rim assembly (Lock ring/standard heel type) for quick change of tire.



TYPE	PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
W/ APERTURE TIRE ONLY	587711	31X10-20	10-16.5	Left	Solid Tire	43	7.5	30.8	9.4			7535	N/A	5
	587712	31X10-20	10-16.5	Right	Solid Tire	43	7.5	30.8	9.4			7535	N/A	5
	587713	33X12-20	12-16.5	Left	Solid Tire	51	7.5	32.7	11.3			9725	N/A	5
	587714	33X12-20	12-16.5	Right	Solid Tire	51	7.5	32.7	11.3			9725	N/A	5
	603927	36X14-20	14-17.5	Left	Solid Tire	89	7.5	35.94	13.7			13600	N/A	5
	587927	36X14-20	14-17.5	Right	Solid Tire	89	7.5	35.94	13.7			13600	N/A	5
W/O APERTURE TIRE ONLY	588711	31X10-20	10-16.5	Left	Solid Tire	43	7.5	30.8	9.4			8860	N/A	5
	588712	31X10-20	10-16.5	Right	Solid Tire	43	7.5	30.8	9.4			8860	N/A	5
	588713	33X12-20	12-16.5	Left	Solid Tire	51	7.5	32.7	11.3			11440	N/A	5
	588714	33X12-20	12-16.5	Right	Solid Tire	51	7.5	32.7	11.3			11440	N/A	5
W/ APERTURE ASSEMBLY	594711	31X10-20	10-16.5	Left	8 ON 8	43	7.5	30.8	9.4			7535	N/A	5
	594712	31X10-20	10-16.5	Right	8 ON 8	43	7.5	30.8	9.4			7535	N/A	5
	594713	33X12-20	12-16.5	Left	8 ON 8	51	7.5	32.7	11.3			9725	N/A	5
	594714	33X12-20	12-16.5	Right	8 ON 8	51	7.5	32.7	11.3			9725	N/A	5
	594732	33X12-20	12-16.5	Left	8 ON 10.75	51	7.5	32.7	11.3			9725	N/A	5
	594734	33X12-20	12-16.5	Right	8 ON 10.75	51	7.5	32.7	11.3			9725	N/A	5
	602927	36X14-20	14-17.5	Left	8 ON 8	89	7.5	35.94	13.7			13600	N/A	5
	596927	36X14-20	14-17.5	Right	8 ON 8	89	7.5	35.94	13.7			13600	N/A	5
W/O APERTURE ASSEMBLY	595711	31X10-20	10-16.5	20 x 7.5	8 ON 8	43	7.5	30.8	9.4			8900	N/A	5
	595712	31X10-20	10-16.5	20 x 7.5	8 ON 8	43	7.5	30.8	9.4			8900	N/A	5
	595713	33X12-20	12-16.5	20 x 7.5	8 ON 8	50	7.5	32.7	11.3			11500	N/A	5
	595714	33X12-20	12-16.5	20 x 7.5	8 ON 8	50	7.5	32.7	11.3			11500	N/A	5

# GALAXY SUPER SMOOTH SDS

**SOLID**

The Galaxy Super Smooth SDS offers smooth flat tread for even wear on hard surfaces and eliminates issues of lug cracking. It eliminates breakdown of equipments or sidewall tearing resulting in maximum equipment up-time. It has steel wire creel beads for improved grip with rim and prevention of rim slippage.



TYPE	PRODUCT CODE	SIZE	ALT. SIZE	SIDE	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
W/ APERTURE TIRE ONLY	590715	31X10-20	10-16.5	NA	Solid Tire	55	7.5	30.7	9.4			7535	N/A	5
	590716	33X12-20	12-16.5	NA	Solid Tire	74	7.5	32.7	11.3			9725	N/A	5
W/O APERTURE TIRE ONLY	591715	31X10-20	10-16.5	NA	Solid Tire	55	7.5	30.7	9.4			7535	N/A	5
	591716	33X12-20	12-16.5	NA	Solid Tire	74	7.5	32.7	11.3			9725	N/A	5
W/ APERTURE ASSEMBLY	597715	31X10-20	10-16.5	NA	8 ON 8	55	7.5	30.7	9.4			7535	N/A	5
	597716	33X12-20	12-16.5	NA	8 ON 8	74	7.5	32.7	11.3			9725	N/A	5
	597709	33x12-20	12-16.5	NA	8 ON 10.75	74	7.5	32.8	11.3			9725	N/A	5
W/ APERTURE ASSEMBLY	598715	31X10-20	10-16.5	NA	8 ON 8	55	7.5	30.7	9.4			4030	N/A	5
	598716	33X12-20	12-16.5	NA	8 ON 8	74	7.5	32.7	11.3			5200	N/A	5








# **BACKHOE LOADER & CONSTRUCTION**

## **HARD-WORKING TIRES FOR THE TOUGHEST TERRAINS**

With advances in tire technology and the extreme specialization we see among today's construction machinery, the bottom line demands that fleet operators go beyond the last decade's thinking on tire choice. Backhoes are not a one-size fits all solution and tires must be carefully selected that provide the maximum performance and life, and minimum overall cost.

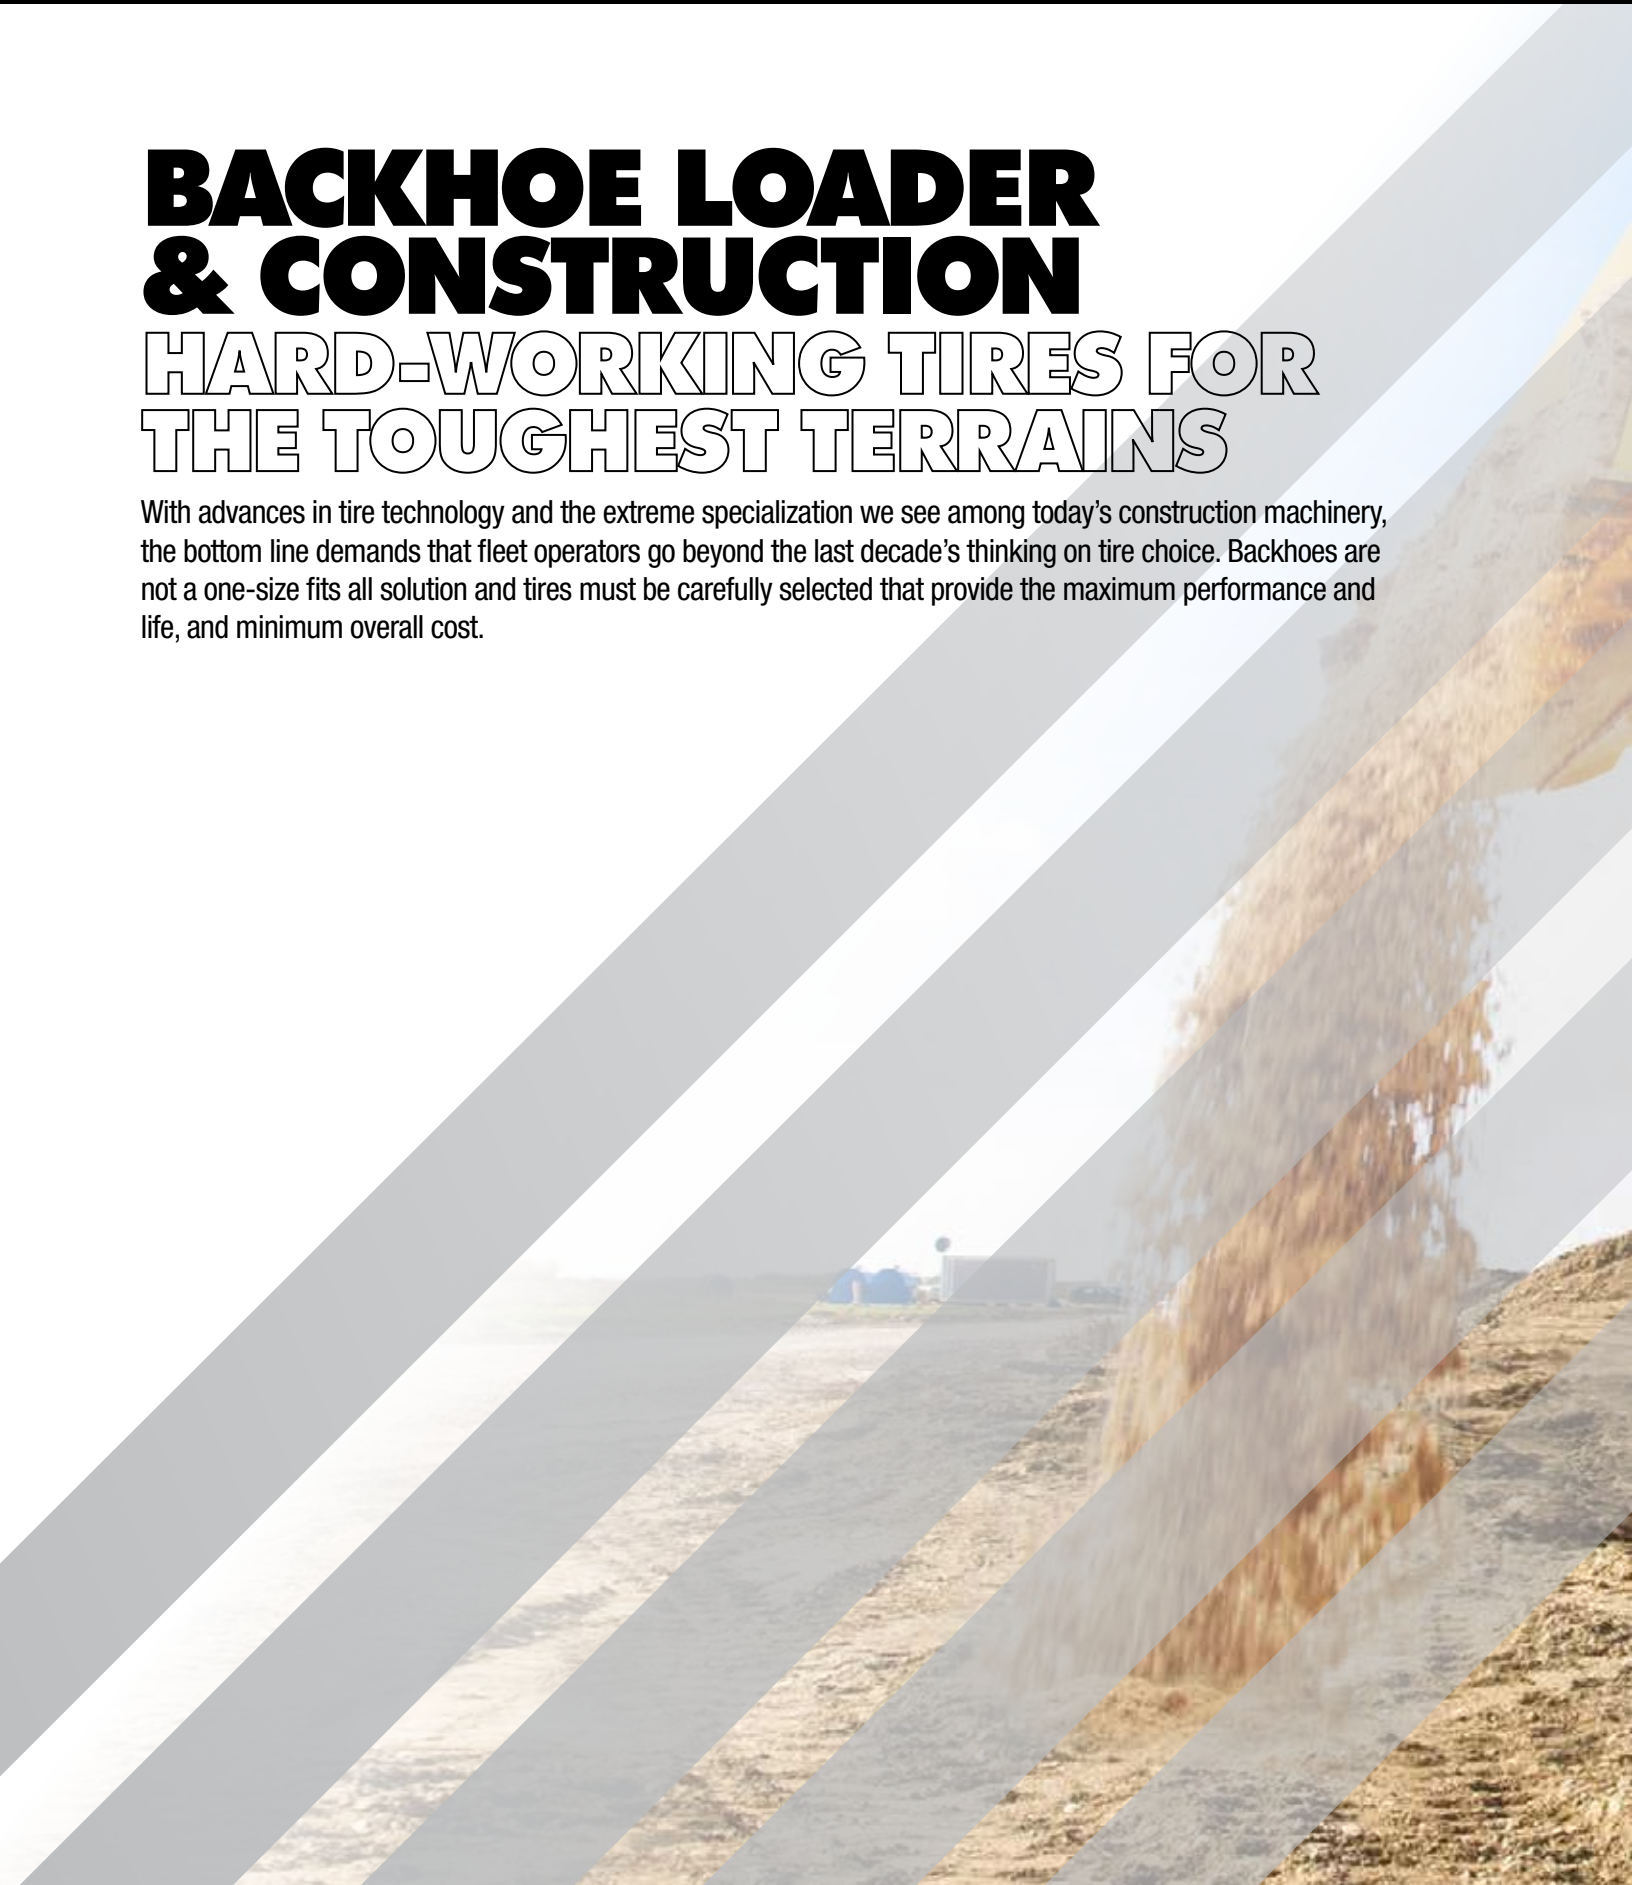





**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

# BACKHOE LOADER OFFERINGS & POSITIONING

**R** RADIAL    **SB** STEEL BELTED

PERFORMANCE (COMPOUND, CONSTRUCTION, LIFE)

Hulk

IND Radial R-4      Multi Tough

Super Industrial Lug      E-Z Rider

LOOSE SURFACE      HARD SURFACE

## SPECIALTY TIRES

<p><b>TURF</b></p> <p>Mighty Mow</p>	<p><b>RIB-TYPE FRONTS</b></p> <p>Workstar</p>	<p><b>HIGH TRACTION LOOSE SOIL</b></p> <p>Marathoner</p>	<p><b>MULTIUSE &amp; SNOW</b></p> <p>Alliance 550</p>
--------------------------------------	---	--	---

## GALAXY JUMBO HULK L-4

The Galaxy Jumbo Hulk has a unique tread pattern that allows it to operate in severe conditions while providing superior self-cleaning characteristics. Because of the deep tread depths and high solid to void ratio, the Hulk L-4 provides extraordinary hours of service and reduces downtime caused due to cuts and punctures. This is a very reliable tire that does not overheat under extensive use on the road.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
202289	12.5/80-18		14	TL	43	9	38	12	111	17	4400	48	25
202432	16.9-24		12	TL	48	W15L	51	16.8	152	23.1	7150	38	25
202440	19.5L-24		14	TL	48	W16L	51.1	19.3	153	23.2	8250	38	25
202443	21L-24		16	TL	50	DW18A	54.3	21	162	24.6	9899	41	25
202723	18.4-26		14	TL	50	W16L	56.2	18.5	165	25.3	9900	42	25
202831	16.9-28		14	TL	50	W15L	55.3	17.3	163	24.9	8550	44	25
202562	16.9-30		14	TL	50	W15L	57.4	17.3	160	24.5	8550	44	25

## GALAXY MULTI USE 550 RADIAL R-3

The Galaxy Multi Use pattern is used in a variety of applications because of its versatile tread design. The unique block tread design enables high performances on snow-covered terrains, as well as on sandy terrains. Its basic directional lug design, divided by separated blocks, provides a good grip on soft surfaces. In addition, its density of tread blocks and high rubber to void ratio enables long tread wear life and low rolling resistances during transport operation on hard surfaces. Uniform ground pressure distribution and tread wear are provided by steel belted carcass structure. In addition, steel belts provide the most efficient puncture protection.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
210211	340/80R18	12.5/80R18	143A8	TL	31	11	39.4	13.5	117.4	17.7	5200	58	40
210215	500/70R24	19.5LR24	164A8	TL	36	W16L	51.5	19.9	154.4	23.3	11000	46	30

## GALAXY IND RADIAL R-4

The Galaxy IND Radial is steel belted and works in a wide variety of applications. The tire provides a long tread life due to a durable rubber compound and large tread blocks.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
211211	340/80R18	12.5/80R18	143A8	TL	35	11	39.4	13.8	117	17.7	6000	58	25
211215	500/70R24	19.5LR24	164A8	TL	50	DW16L	51.5	19.9	153	23.4	11000	58	25

## GALAXY MULTI-TOUGH

The Galaxy Multi-Tough works well in hard surface applications and job sites. Radial construction gives this tire better traction on the road and longer service hours.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
209211	340/80R18	12.5/80R18	136A8	TL	30	W11	39.4	13.5	115	17.7	4940	46	25
209853	405/70R18		146A8/B	TL	23	W13	40.4	16.2	121.6	18.2	6610	64	30
209854	405/70R20		152A2/143B	TL	23	W13	42.4	16	128.5	19.3	6010	54	30
209855	405/70R24		146A8/B	TL	35	W13	46.4	16	139.8	21.4	6610	54	30
209214	440/80R24	16.9R24	154A8	TL	34	DW14L	51.7	17.7	155.7	23.2	8250	46	25
209215	500/70R24	19.5LR24	157A8	TL	43	DW16L	51.6	19.8	150	23	9100	46	25
209901	480/80R26	18.4R26	160A8	TL	34	DW15L	56.2	18.9	169.1	25.2	9900	46	25
209216	440/80R28	16.9R28	156A8	TL	43	DW14L	55.7	17.4	164	25.2	8800	46	25



## GALAXY HIGH-LIFT RADIAL

The Galaxy High-Lift Radial is engineered for use on loaders and telehandlers operating in soft soil and muddy conditions. It offers superior traction, self-cleaning, and long wear. The flat, wide tread provides stability for telehandlers and loaders.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
515761	405/70R24		152A8	TL	44	W13	46.4	16	139.8	21.5	7826	58	25
515209	500/70R24	19.5LR24	164A8	TL	44	W16L	51.6	19.8	156.1	24	11023	58	25

## GALAXY SUPER INDUSTRIAL LUG R-4

**OEM FITMENT**

The Galaxy Super Industrial Lug is heavier, beefier, and built with more plies than other R-4 tires providing superior strength and longer tread life. Because of its durability and versatility, it can be found as an original equipment choice on some of the worlds most popular equipment.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
201103	25X850-14		6	TL	17	7	25.6	8.1	78	11.8	1320	50	20
201290	12.5/80-18	320/80-18	116A8	TL	33	9	38.8	12.1	115.6	17.5	2756	28	25
201289	12.5/80-18	320/80-18	12 / 134A8	TL	33	9	38.8	12.2	116	17.5	4680	62	25
201294	15-19.5		6	TL	26	11.75	39.9	14.7	120	18.2	4180	30	20
201349	400/70-20	16/70-20	144A8	TL	30	W13	42.3	15.5	127	19.3	6150	46	25
201707	14.9-24		6	TL	33	W13	48.8	14.9	144.8	22.2	4300	24	25
201430	16.9-24		8	TL	33	W15L	51.3	17.1	149	22.9	5840	28	25
201432	16.9-24		12	TL	33	W15L	51.3	17.1	149	22.9	7150	38	25
201435	17.5L-24		12	TL	33	W15L	49.3	17.2	145	22.1	6600	38	25
201440	19.5L-24		14	TL	34	W16L	51.5	20	152	23	8250	38	25
201508	18.4-26	480/80-26	12 / 156A8	TL	36	W16L	57	19.4	166	25.7	8800	37	25
201548	16.9-28	440/80-28	12 / 152A8	TL	34	W15L	55.5	17.3	167	25.3	7850	38	25
201562	16.9-30		14	TL	33	W15L	57.3	16.9	169	25.9	8550	44	25

## GALAXY EZ RIDER R-4

**OEM FITMENT**

The Galaxy EZ Rider provides a smooth ride for the operator and great self-cleaning for constant traction. The rim shield and super sidewall help protect the tire against cuts and snags.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
200707	14.9-24		6	TL	32	W13	48.2	14.6	141.4	21.3	4300	24	25
200426	14.9-24		12	TL	32	W13	48	14.9	144.6	21.9	6400	42	25
200432	16.9-24		12	TL	33	W15L	50.6	17.2	148	22.7	7150	38	25
200434	17.5L-24		10	TL	33	W15L	48.4	17.5	144.3	22.1	6150	32	25
200439	19.5L-24		12	TL	34	W16L	51.7	19.3	155	23.5	7600	34	25
200442	21L-24		12	TL	35	DW18L	53.9	20.9	161	24.4	8550	32	25
200546	16.9-28		10	TL	33	W15L	55.7	17	164	25.1	6800	32	25
200548	16.9-28		12	TL	33	W15L	55.7	17	164	25.1	7600	38	25
200551	21L-28		18	TL	35	DW20	58.2	21	172	26.5	11354	44	25

## GALAXY MARATHONER R-4

OEM FITMENT

The Galaxy Marathoner delivers the highest traction of any industrial R-4 tire on the market. The Marathoner was specifically designed to provide outstanding wear and to offer great pulling power. It features the Galaxy "Mud Breakers" which are designed to eject mud from the tread area. This combination has made the Marathoner one of the best industrial R-4 tires in its class and the perfect tire for original equipment and aftermarket usage.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
102045	23X850-14		6	TL	14	7JA	23.7	7.8	72	11	1820	59	5
102103	25X850-14		6	TL	17	7JA	25.7	8.2	77	11.9	2150	50	5
102141	27X850-15		6	TL	18	7JA	26.9	8.4	82	12.5	2470	45	5
102259	10-16.5		8	TL	23	8.25	30.4	10.6	92	14.1	3500	45	5
102264	12-16.5		10	TL	26	9.75	32.8	12	98	15	4220	40	5
102274	14-17.5		6	TL	28	10.5	36.3	13.7	106	16.3	4800	30	5
102276	14-17.5		10	TL	28	10.5	36.3	13.7	106	16.3	6800	55	5
102287	12.5/80-18		10	TL	35	9	38.8	12.1	116	17.5	3740	45	25
102294	15-19.5		6	TL	26	11.75	39.9	15.3	118	18.2	6150	30	5
102295	15-19.5		12	TL	26	11.75	39.9	15.3	118	18.2	9100	60	5
102348	43X1600-20		4	TL	27	14	42.2	16.1	128.6	19.5	3080	20	20
102961	12.4-20		10	TL	32	11	40.7	12.4	120.9	18.6	4080	44	25
102744	18.4-24		8	TL	33	W16	53.1	18	159	24.1	6400	23	25

## GALAXY SUPER TRENCHER HF-3/ I-3

OEM FITMENT

The Galaxy Super Trencher was designed with super sidewall and rim shield protection, and works well on trenchers and many other types of machinery.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
160088	26X12-12		8	TL	24	11	25.9	12.4	77	11.7	2998	44	5
160163	29X1250-15		8	TL	21	10.5	29.6	12.5	89	13.5	3420	45	5
160174	31X1550-15		8	TL	25	W13	32.1	15.9	94	14.3	4540	40	5
160351	38X18-20		12	TL	42	14	39.3	18.1	117	17.7	7600	65	5

## GALAXY SUPER HIGH LIFT R-1

The Galaxy Super Hi Lift has earned a reputation around the world as a tire that outlasts the competition and provides reliable service. This tire is designed for telescopic handlers and European backhoes used in agricultural applications. These tires provide extra traction in soft soil. In addition, the Rim Shield Protector adds to this tire's durability.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
203427	15.5/80-24		12	TL	48	W12	49.1	15	147.0	22.1	8250	45	5
203965	15.5/80-24		16	TL	48	W12	49.1	15	147.0	22.1	9900	58	5
203435	17.5L-24		12	TL	50	W15L	51.2	17.6	148.0	22.9	11400	45	5
203437	17.5LR24		150A8	TL	50	W15L	49	17.5	145.0	22.2	7400	44	25



## GALAXY INDUSTRIAL RIB ULTRA F-3

The Galaxy Industrial Rib Ultra is designed to provide excellent directional stability on the front of two-wheel-drive backhoes and features reinforced sidewalls to deliver superior protection against cuts and snags.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
240230	11L-16SL		10	TL	16	8	31.6	11.1	94	14.6	2470	52	25

## GALAXY INDUSTRIAL RIB F-3

The Galaxy Industrial Rib F-3 is designed for the front wheels of two wheel drive Backhoe loaders.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
213242	14.5/75-16.1		10	TL	20	11	36.7	15.1	57.1	16.6	3100	40	25

## GALAXY SUPER INDUSTRIAL RIB F-3

Galaxy Super Industrial Rib tires are designed for the front wheels of a two-wheel drive backhoe. Galaxy has developed this unique design to ensure even less soil disturbance and cutting on grass by introducing an F-3 version. The combination of flotation and low compaction makes F-3 the perfect tire for golf courses and cemeteries.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
204241	14.5/75-16.1		16	TL	20	11	36.6	15	108.4	16.4	3100	70	25

## GALAXY WORKSTAR F-3

**OEM FITMENT**

The Galaxy WorkStar is specifically engineered to be used on the front of two-wheel-drive backhoes.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
231155	11L-15		10	TL	16	8LB	30.3	10.8	89	13.9	2339	52	25
231230	11L-16		10	TL	15	8	32.4	11	96	14.7	2470	52	25
231231	11L-16		12	TL	15	8	32.4	11	96	14.7	2680	64	25

## CONSTELLATION CST-201

The Constellation CST 201 is built with a beefier lug compared to other R-4 tires and offers durability and versatility making it an entry level choice on Backhoe loader equipment fronts.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
217289	12.5/80-18		12 / 134A8	TL	33	9	38.8	12.1	115.6	17.5	4680	62	25



# **OFF-THE-ROAD** **PURPOSE-BUILT TIRES FOR THE** **TOUGHEST CONDITIONS**

Galaxy and Primex Off-The-Road tires help equipment operators tackle any challenge on nearly any job site. Whether the challenge is delivering long-lasting performance on abrasive surfaces, resisting chunks and cuts deep in the mines, or digging into muck and mud, Galaxy and Primex have tires purpose-built for the job.







**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

# SMALL TELEHANDLER/GRADER OFFERINGS & POSITIONING



PERFORMANCE (COMPOUND, CONSTRUCTION, LIFE)



Galaxy MGRS 200



Galaxy Giraffe XLW



Galaxy S-300



Galaxy Giraffe ND



Galaxy SHL



Galaxy MPC





Primex G3000

LOOSE SURFACE

HARD SURFACE

## SPECIALTY TIRES

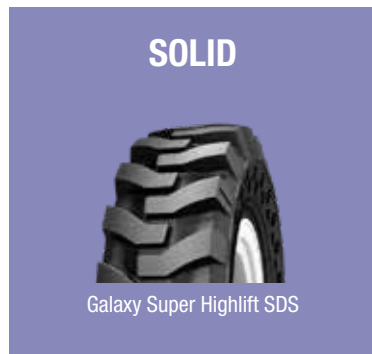

SOLID



Galaxy Super Highlift SDS



## GALAXY GIRAFFE XLW G-2/L-2

OEM FITMENT

The Galaxy Giraffe XLW features an all new, multi-purpose design including a wide, flat tread and high turn-up plies that provide stability and make it the optimal tire for Telehandlers. The Giraffe XLW is engineered using a neutral casing design, with solid center blocks for long wear and ride comfort, while its aggressive open shoulder lugs provide excellent traction.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
292408	1300-24		14	TL	32	8TG	50.2	13.5	151	22.9	13200	76	5
292413	1400-24		16	TL	32	8TG	53	14.5	152	23.6	16100	80	5
292451	15.5-25		12	TL	32	12/1.3	50	15.6	143	22.3	12300	58	5
292458	17.5-25		16	TL	34	14/1.5	53.1	17.6	154	23.8	16100	69	5
292468	20.5-25		16	TL	36	17.00/2.5	59	20.8	171	26.5	18200	51	5
292940	16.9-28		12	TT	43	W15	55.5	17.3	169.2	25.7	7826	38	25

## GALAXY GIRAFFE ND L-3

The Giraffe ND is a low aspect ratio premium telehandler tire which is great for both on- and off-road conditions. Its special non-directional pattern design offers excellent traction on loose surfaces and has high tread depth for increased tire life. The Giraffe ND with its features helps to reduce operating cost and maximize profit. It has a special heat and cut resistant compound.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
288535	370/75-28		14	TL	43	11	50	14.3	148.8	22.8	12000	73	5
288533	400/75-28		16	TL	43	12	51.9	15.6	154.2	23.5	14330	73	5

## GALAXY S300 G-3

The Galaxy S-300 G-3/L-3 is the latest addition to Galaxy's range of construction tires. The advanced S-pattern promises exceptional traction, excellent stability and durability which ensures maximum productivity. It ensures long tire life especially when operations involve significant movement on hard surfaces.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
283409	1300-24		16	TL	36	24	51.0	13.8	139.8	23.7	14300	87	5
283413	1400-24		16	TL	32	24	53.8	14.8	159.8	24.2	16100	80	5
283458	17.5-25		16	TL	37	25	53.1	17.5	158.7	24.0	16100	69	5

## PRIMEX G3000 G-2

OEM FITMENT

The Primex G3000 is designed with a reinforced carcass and high turn-up plies to provide the enhanced lateral stability that telehandlers require to operate effectively. Its aggressive open shoulder lugs deliver exceptional traction in off-road applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
282407	1300-24		12	TL	30	8TG	50.1	13.7	149.2	22.9	12300	65	5
282409	1300-24		16	TL	30	8TG	50.1	13.7	149.2	22.9	14300	87	5
282411	1400-24		12	TL	30	8TG	53.1	14.9	157.9	24.1	13900	62	5
282413	1400-24		16	TL	30	8TG	53.1	14.9	157.9	24.1	16100	80	5

## GALAXY MPC G-2/L-2

OEM FITMENT

The Galaxy MPC is designed with a reinforced carcass and high turn-up plies to provide the enhanced lateral stability that telehandlers require to operate effectively. Its aggressive open shoulder lugs deliver exceptional traction in off-road applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
287407	1300-24		12	TL	30	8TG	49.8	12.9	146	22.7	12300	65	5
287411	1400-24		12	TL	31	8TG	52.9	14.4	154	24	13900	62	5
287413	1400-24		16	TL	31	16TG	52.7	14.2	153.9	23.9	16100	80	5
287451	15.5-25		12	TL	31	12.00/1.3	50.3	15.4	148.2	23	12300	58	5
287458	17.5-25		16	TL	31	14.00/1.5	53	17.3	155.1	23.5	16100	69	5
287468	20.5-25		16	TL	35	17.00/2.5	58.8	20.4	175	26.5	18200	51	5
287477	23.5-25		16	TL	40	19.5/2.5	63.7	23.5	188.1	28.5	20950	44	5

## GALAXY SLG II G-2

The Galaxy SLG II features an aggressive tread design and self-cleaning characteristics that provide excellent traction in mud and dirt.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
286428	1600-24		16	TL	36	10	57.5	16.8	171.3	26.4	8050	51	25

## GALAXY SUPER HIGH LIFT SDS

The Super High Lift SDS is designed for telehandlers working in extreme conditions. The robust construction gives the tire longer life and reduced downtime, ensuring maximum vehicle productivity. Its stepped lug design and deep tread enhances stability and provides excellent traction. The dual aperture design cushions the ride and minimizes heat generation. Special abrasion-resistant compound safeguards the tire against wear and improves tire life.



TYPE	PRODUCT CODE		SIZE	RIM CONFIGURATION	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
	LEFT	RIGHT												
TIRE ONLY	554355	564355	1300-24	Lip Type	SD	87	8.50V	50.9	13.1			15350	NA	5
TIRE ONLY	554416	564416	1400-24	Lip Type	SD	92	8.50V	52.6	13.9			16980	NA	5
ASSEMBLY	557355	556355	1300-24	10 Bolt - Lip type	SD	87	8.50V	50.9	13.1			15350	NA	5
ASSEMBLY	557416	556416	1400-24	10 Bolt - Lip type	SD	92	8.50V	52.6	13.9			16980	NA	5

## CONSTELLATION CST-318 E-3/L-3

The Constellation 318 Super Grip Loader Dozer is a massive heavy-duty tire that provides gripping in construction, mining, logging and rock service jobs. This has extra wide lugs providing superior traction. It is a non-directional tire built to serve an entry level option for loader applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
289458	17.5-25		16	TL	36	14/1.5	53.1	17.5	155.1	23.6	16100	69	5
289469	20.5-25		20	TL	38	17/2.0	58.7	20.5	170.9	25.9	20900	65	5
289478	23.5-25		20	TL	41	19.5/2.5	63.7	23.5	185.8	28.2	24000	54	5
289495	26.5-25		24	TL	48	22/3.0	68.9	26.5	201.4	29.25	30900	58	5

## GALAXY EXR300 ROCK LUG E-3/L-3

OEM FITMENT

The Galaxy EXR300 Rock Lug is designed to provide heavy-duty traction and resistance to slippage. Galaxy engineers designed this tire with a deeper tread depth than the standard E-3/L-3 giving the Rock Lug a longer wear life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
344418	1400-24		28	TT	32	10	53.5	14.6	161	24.7	22000	134	5
344452	14.00-25		20	TL	31	10	53.9	14.8	160	24.7	18740	102	6
344450	1400-25		28	TL	32	10	53.9	14.6	161	24.7	22000	134	5
344451	15.5-25		12	TL	31	12/1.3	50.3	15	147.8	22.6	12300	58	5
344458	17.5-25		16	TL	34	14/1.5	53.1	17.4	156	23.8	16100	69	5
344459	17.5-25		20	TL	34	14/1.5	53.3	17.4	156	23.8	18200	83	5
344217	17.5-25		24	TL	36	14/1.5	53.1	17.5	161	24.2	20400	105	5
344468	20.5-25		16	TL	38	17/2.0	58.3	21.2	168.7	25.8	18200	51	5
344469	20.5-25		20	TL	38	17/2.0	58.3	21.2	168.7	25.8	20900	65	5
344470	20.5-25		24	TL	38	17/2.0	58.3	21.2	163.3	25	22700	76	5
344478	23.5-25		20	TL	43	19.5/2.5	63.8	23.9	183	27.8	24000	54	5
344662	23.5-25		28	TL	43	19.5/2.5	63.8	23.9	183	27.8	30000	80	5
344485	26.5-25		28	TL	44	22/3.0	67.6	26.2	193	29.5	34200	69	5
344492	29.5-25		28	TL	52	25/3.5	73.2	29.2	208	31.8	38600	62	5

## GALAXY HIPPO E-2/L-2

OEM FITMENT

The Galaxy Hippo is designed for performance in soft and wet soil conditions. The tires are designed for operation in conditions where extra flotation is required and, in many cases can eliminate the need for expensive and cumbersome tracks.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
276469	20.5-25		20	TL	62	17/2.5	58.7	19.4	179.2	27	20900	65	5
275478	23.5-25		20	TL	67	19.5/2.5	64.5	24.8	186.6	28	24000	54	5
275477	23.5-25		24	TL	67	19.5/2.5	63.3	22.2	186.9	28.3	27550	69	5
276482	26.5-25		20	TL	71	22/3.0	66.2	29.5	190.6	29.5	29100	51	5

## GALAXY EXCAVATOR EX1 E-2

The Galaxy EX-1 is specially built for excavators. Its classical tread pattern provides excellent traction and good self cleaning characteristics (Set includes tube and flap).



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
341322	1000-20		16	TT	26	7.5	41	10.8	121	18.8	6600	109	30
341330	1100-20		16	TT	27	8	42.8	12.2	128	19.5	6950	105	30

## GALAXY DIG MASTER E-2

The Galaxy DigMaster has strong carcass construction that provides puncture resistance and good stable performance. Wide-spaced lugs provide high traction in all terrains and highly efficient self-cleaning. Special compound provides improved tread life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
308309	8.25-20		14	TT	23	6.5	39.1	9.3	121.6	18.9	3310	100	30
308313	9.00-20		14	TT	26	7	40.2	10.4	120	18.4	5520	102	30
308322	1000-20		16	TT	26	7.5	42	11	125.1	19	6950	109	30
308330	11.00-20		16	TT	26	8	42.8	12.2	128	20.5	6950	105	30

## PRIMEX SMOOTH ROLLER C-1

The Galaxy Smooth Roller C-1 is specifically designed for compacting roadbeds and rolling asphalt. The smooth wide tread provides even pressure distribution on road surfaces that gives smooth finish of road surface. The compound used in this tire provides enhanced resistance to oily chemicals used in compacting applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
381314	900-20		16	TT	NA	7	40.5	10.3	118.8	18.24	10500	115	5

## GALAXY SMOOTH COMPACTOR C-1

OEM FITMENT

The Galaxy Smooth Compactor is designed specifically for compacting roadbeds and rolling asphalt, the smooth wide tread provides even pressure distribution on road surfaces. The compound used in this tire provides enhanced resistance to the oily chemicals used in compacting applications. The Smooth Compactor tires have won the favor of major original equipment manufacturers due to their outstanding durability.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
386127	7.50-15		12	TT	NA	6	30.5	8.4	92	13.9	4080	58	5
386128	7.50-15		14	TT	NA	6	30.5	8.4	92	13.9	6400	127	5
380331	1100-20		18	TT	NA	8	42.7	11.8	125.5	19.6	12800	120	5
380347	14/70-20		20	TL	NA	L11	38.6	14.2	114.1	17.7	12020	110	5

## GALAXY SUPER PAVER E-7

OEM FITMENT

The Galaxy Super Paver has been designed for optimum service in asphalt applications where low disturbance and long wear are necessary.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
383344	1400-20		12	TT	12	10W	48	14.7	138.5	21.2	12300	45	5
383474	2100-25		28	TL	22	15/3.0	65.9	22.5	188.6	28.9	36400	83	5

## GALAXY SAND RIB E-7

The Galaxy Sand Rib has been designed for optimum service in asphalt spreader applications where low soil disturbance and long wear are necessary. Rib design provides excellent steering stability and improved lateral traction. Shallow tread depth provides excellent heat dissipation.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
385463	1800-25		16	TL	20	10.0/1.5	59.9	18.2	175.2	26.5	16535	36	5

## GALAXY GRADEROCK II G-3

OEM FITMENT

The special tread design maximizes traction and provides slip resistance in challenging applications. High land-sea ratio ensures puncture resistance.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
284409	1300-24		16	TL	32	8	50.3	13.1	149.3	22.9	7851	58	25



## GALAXY KING OF COAL L-4

The Galaxy King of Coal is engineered for the most demanding mining applications. It has a superb block tread for excellent traction in slippery and wet mine environments. The sidewall bumper is provided for rim protection. High ply rating ensures extra load capacity and casing durability.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
354136	825-15		12	TT	29	6.5	33.1	9.4	96	14.8	6000	105	5
354173	35X15-15		32	TL	64	10.5	35.2	14.9	102	15.6	12300	150	5
354952	35X15-16		32	TL	64	10.5	35.4	14.6	104	15.9	12800	150	5

## GALAXY ROCK MINE LUG E-3

OEM FITMENT

The Galaxy Rock Mine Lug is built from molds originally designed for mining operations, the Galaxy Rock Mine Lug is ideal for use under conditions requiring a super-strong tire that is resistant to sidewall punctures.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
300313	900-20		14	TT	26	7	41.3	10.9	119	18.2	12800	110	10
300314	900-20		16	TT	26	7	41.7	10.6	119	19.6	13820	125	10
300042	1000-20		18	TT	27	7.5	42.2	10.9	127.2	20	14800	115	10

## PRIMEX ROCK MINE LUG PLUS E-3

The Galaxy Rock Mine Lug Plus is a specially designed tire for heavy duty mining applications. Its optimized tread compound reduces cuts and punctures. Robust nylon casing ensures superior re-tread ability. Its specially designed tread pattern provides excellent traction under taxing conditions.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
325042	1000-20		18	TT	28	7.5	42.7	11.02	129	20.1	6170	110	30
325331	1100-20		18	TT	30	8.5	44.1	11.81	133	20.8	6614	110	30

## GALAXY ROCK MAX E-4 / L-4

The Galaxy Rock Max is designed especially for heavy duty surface mining applications. Robust nylon carcass with higher number of actual plies, provide superior strength to the carcass. A specially formulated tread compound for mining and extra wide reinforced bead provide greater strength. Wide flat tread profile results in larger ground contact higher stability, load carrying and traction.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
320464	1800-25		32	TL	67	13	65.7	19.7	193.5	28.6	19290	83	30
320465	1800-25		40	TL	67	13	65.7	19.7	193.5	28.6	21495	102	30

## GALAXY SUPER SEVERE DOUBLE WIDTH LUG E-4 / L-4

The Galaxy Super Severe Double Width Lug is specially designed for heavy duty forklifts and empty container handlers. Constructed with special mining compound equips Super Severe Double width Lug to toil on the most abrasive surfaces with minimum heat generation and abrasion. The high lug to void ratio provides maximum ground contact assuring excellent durability. SSDWL promises agility with outstanding durability making it the perfect choice for port application.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
305403	1200-24		24	TT	51	8.5	50.67	13	145.3	23.2	20160	130	15
305418	1400-24		28	TT	59.6	10	55.4	14.8	167.1	24.4	20160	145	15

## GALAXY SUPER SEVERE MINE L-5S

The Galaxy Super Severe Mine is ideal for a variety of applications. This tire has been designed for maximum ground contact and is produced with a specially formulated compound that offers maximum protection and long life, even when operated under grueling conditions.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
370337	1200-20		20	TL	71	8.5	46.2	12.4	136.1	21.1	13700	123	5
370402	1200-24		20	TT	69	8.5	50	12.2	147.6	23.2	15200	120	5
370988	17.5-25		28	TL	88	14	55.1	17.5	145.1	22.5	22000	115	5
370464	1800-25		32	TL	111	13.00/2.5	65.5	18.9	195	29.9	33100	109	5
364469	20.5-25		20	TL	98	17.00/2.0	58.7	19.4	178.5	27.0	20900	65	5
370479	23.5-25		24	TL	96	19.5/2.5	64.6	23.9	189.2	29.5	27600	70	5
370486	26.5-25		32	TL	114	22.00/3.0	69.2	26.1	201.4	31.1	37500	80	5
370493	29.5-25		40	TL	132	25.00/3.5	75.6	29.5	215.1	32.6	48060	91	5
364606	35x65-33	SB	42	TL	122.2	28	81.8	35	244	37	58400	95	5

## GALAXY LHD 500 L-5

The Galaxy LHD 500 is specially designed for harsh conditions. The strong sidewalls provide stiffness and cut resistance while operating in the harshest conditions. Unique, heavy sidewall protection, open shoulder and non-directional tread offer excellent self-cleaning and all around traction on rough terrains.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
368459	17.5-25		20	TL	92	14	53.62	17.0	163	24.7	18200	83	5
368469	20.5-25		20	TL	96	17/2.0	60.7	21	175	27.1	20900	65	5
368478	23.5-25		20	TL	100	19.5/2.5	64.7	23.7	191	29	24000	54	5

## GALAXY LHD 500A L-5

The Galaxy LHD 500 is specially designed for harsh conditions. The strong sidewalls provide stiffness and cut resistance while operating in the harshest conditions. Open shoulder and non-directional tread offer excellent self-cleaning and all around traction on rough terrains.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
371484	26.5-25		26	TL	120	22.00/3.0	70.8	26.7	207.9	31.5	33100	65	5
371492	29.5-25		28	TL	134	25.00/3.5	74.7	29.6	218	33.1	38600	62	5
367606	35x65-33*		42	TL	135	28	81.4	35	244	37	58400	95	5

\* Steel-belted

## GALAXY LHD 500 SDS

SOLID

The Galaxy LHD 500 is specially designed for harsh conditions. The strong sidewalls provide stiffness and cut resistance while operating in the harshest conditions. Open shoulder and non-directional tread offers excellent self-cleaning and all around traction on rough terrains.



PRODUCT CODE	SIZE	ALT. SIZE	APERTURE	TYPE	WEAR LIMIT	RIM	OD	SW (INCH)	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
581416	14.00-24		Y	Solid	231	10	52.7	14.6			18740	N/A	5
581460	14.00-25		Y	Solid	231	10	52.6	14.6			18740	N/A	5
581461	17.5-25		Y	Solid	231	14	52.6	17.7			21160	N/A	5

## GALAXY SUPER SMOOTH SDS

SOLID

The Galaxy Super Smooth SDS is specially designed with maximum usable rubber and a smooth pattern. The flat tread radius provides even and reduced wear and low ground pressure. Steel wire creel beads prevent rim slippage, while solid construction eliminates downtime due to punctures. Aperture variant is available for improved ride comfort.



PRODUCT CODE	SIZE	ALT. SIZE	APERTURE	TYPE	WEAR LIMIT	RIM	OD	SW (INCH)	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
590466	16.00-25		Y	Solid	271	11.25	58.8	16			26,530	N/A	5
590471	20.5-25		Y	Solid	271	17	59	20.5			29,480	N/A	5
590483	23.5-25		Y	Solid	314	19.5	64	23.5			33,730	N/A	5
597488	26.5-25		Y	Solid	342	22	67.5	26.5			44,250	N/A	5
590491	29.5-25		Y	Solid	380	25	72.5	29.5			52,870	N/A	5

## GALAXY MGR200 G-2

RADIAL OTR

The Galaxy MGR is manufactured with robust radial construction and special compounds to excel even in the most extreme working conditions. Special compounds ensure protection against lug tearing and heavy wear. The MGR sidewall protector safeguards against side damages and works as a shock-absorber.



PRODUCT CODE	SIZE	ALT. SIZE	PLY/STAR	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
272420	14.00R24		*	153A8	TL	34	9.00GR	53.2	14.6	157.8	24.5	8050	54	25
272693	17.5R25		*	153A8	TL	36	14	53.1	17.5	157.8	24.5	8050	44	25
272696	20.5R25		*	161A8	TL	38	25	58.8	20.7	176.7	26.9	10196	44	25

## GALAXY LDSR300 E-3 / L-3

RADIAL OTR

The Galaxy LDSR is specially constructed for wheel loaders operating in the toughest environments. Transportation of heavy load demands excellent stability and robustness. Sturdy radial construction coupled with strong sidewall protector provides LDSR 300 superior strength and endurance to withstand challenging terrains. Unique stepped lug design and open channel layout help to keep it clean and free of mud for dependable non-stop performance.



PRODUCT CODE	SIZE	ALT. SIZE	PLY/STAR	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
299694	17.5R25		**	182A2	TL	36	14	53.1	17.5	157.8	24.5	13120	94	25
299691	20.5R25		**	193A2	TL	40	17	58.8	21.1	171.7	26.1	17750	94	25
299698	23.5R25		**	201A2	TL	44	19.5	63.6	23.9	185.9	28.2	22380	94	25
299700	26.5R25		**	209A2	TL	49	22	68.3	26.7	185.9	29.7	28550	94	25
299702	29.5R25		**	216A2	TL	57	25	73.3	29.8	220.4	32.3	34650	94	25

## GALAXY HTSR400 E-4 / L-4

RADIAL OTR

The Galaxy HTSR is specially built for dump trucks that face extreme environments while hauling heavy loads. High tread depth ensures consistent traction and greater cut resistance making it the more productive choice. The presence of special compound ensures minimum heat build-up while performing longer runs. Superior cut & chip protection with optimized belt design provides excellent durability resulting in reduced downtime.



PRODUCT CODE	SIZE	ALT. SIZE	PLY/STAR	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
304698	23.5R25		**	185B	TL	64	19.5	64.4	23.9	187.6	29	20400	76	30
304700	26.5R25		**	193B	TL	68	22	68.4	26.5	200.8	30.6	25400	76	30
304702	29.5R25		**	200B	TL	72	25	74.4	29.9	216.5	33	30900	76	30

# **MATERIAL HANDLING** ENGINEERED TO PERFORM IN CHALLENGING ENVIROMENTS

Few applications cover a broader set of challenges than material handling. From the sweltering lots of tropical ports to the bone-chilling cool of subsurface mines, material handling equipment must stay on the move. And with varied surfaces and the challenge of handling massive, dynamic loads, material handling tires need to be engineered and constructed to the highest standards.







**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

# MATERIAL HANDLING TIRE USAGE CHART

TIRE	CONTAINER HANDLER/ HEAVY DUTY FORKLIFT	REACH STACKERS	RUBBER TIRE GANTRY/ MOBILE CRANE	BOMB CARTS/ TERMINAL TRACTORS
<b>Bosslift III</b>	9.00-20 16PR TT			
	10.00-20 16PR TT			
	12.00-20 20/24PR TT			
<b>Yardmaster Ultra</b>	9.00-20 14PR TT			
	10.00-20 16PR TT			
	12.00-20 20/28PR TT			
<b>HM 300E</b>	14.00-24 28PR TL			
<b>HM 350E</b>	12.00-24 20PR TT			
<b>Portmax</b>	12.00-24 20PR TL	18.00-25 40PR TL		
	16.00-25 28PR TL	18.00-33 40PR TL		
<b>Portstar Plus</b>		18.00-25 40PR TL		
<b>HM 450 E</b>		18.00-33 40PR TL		
<b>HM 400S</b>	16.00-25 32PR TL	18.00-25 40PR TL		
<b>HM 500S</b>		18.00-25 40PR TL		
<b>Super Grip</b>			18.00-25 40PR TL	
<b>Super Trac</b>			14.00-24 28PR TL	
			16.00-25 32PR TL	
			21.00-25 40PR TL	
<b>Yardmaster SDS</b>				10.00-20/7.0
				10.00-20/7.5
<b>Lifter SDS</b>				10.00-20/7.5
<b>Terminal Master</b>				280/75R22.5
				310/80R22.5

TT - Tube Tire  
TL - Tube Less

BIAS
  SOLID
  RADIAL

## GALAXY SUPER GRIP E-3

The Galaxy Super Grip port tire features a time-tested tread pattern with a heavy sidewall for excellent traction, stability and comfort.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
342464	1800-25		32	TL	40	13/2.5	65.7	19.7	193.5	28.6	2100	80	10
342465	1800-25		40	TL	40	13/2.5	63.7	19.6	187.4	28.6	47700	145	5

## GALAXY SUPER TRAC E-3

OEM FITMENT

The Galaxy Super Trac has high lateral stability, enabling it to carry heavy load on concrete and hard surfaces. Extra-thick side wall limits flexing during operation, decreasing heat generation. This reduces the probability of sidewall damage and results in longer service life of the tire. Robust nylon casing and reinforced high strength bead provide excellent stability. The tire contains a special tread compound for extra-long life even on abrasive surfaces. High ground contact area gives good traction on paved surfaces. Continuous lug pattern helps to mitigate the chances of lug chunking and tire damage.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
348417	1400-24		28	TL	32	10W	53.9	14.8	161	24.8	27500	145	5
348453	1600-25		28	TL	37	11.25	53.9	14.8	161	24.8	29100	145	5
348455	1600-25		32	TL	33	11.25	58.8	17	175.6	27	36200	145	5
348476	2100-25		40	TL	38	15.00/3.0	68.9	22.8	216	32.3	61500	145	5

## GALAXY HM300 E-3

OEM FITMENT

The Galaxy HM300 is an advanced tire for port applications engineered with a deep tread for long wear and premium performance. The strong casing and high actual number of plies provide lateral stability and give the HM300 its heavy load capacity. The special tread compound and insulation between plies resist heat build-up, extending the life of the tire and providing excellent service on hard surfaces.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
338417	1400-24		28	TL	32	10W	53.9	14.8	161	24.8	27500	145	5

## GALAXY HM350E E-3.5

The Galaxy HM350E is a tire for port applications. The deep tread ensures longer life which results in superior performance. The high number of actual plies ensures high lateral stability and a heavy load capacity. The specially formulated tread compound and insulation between the plies generate less heat, extend the life of the tire and provide excellent service on hard surfaces.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
345401	1200-24		20	TT	35	8.5	49	12.4	143.3	23	20500	145	5

## GALAXY PORT STAR E-4.5+

OEM FITMENT

The Galaxy Port Star is an advanced tire for port applications. The strong bead, casing and high number of plies ensure greater lateral stability and high load-carrying capacity. The specially-formulated extra-deep tread compound helps extend the life of the tire and provides excellent service on hard surfaces.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
349465	1800-25		40	TL	83	13.00/2.5	65.9	19.6	194.5	29.9	47700	145	5



## MATERIAL HANDLING

### GALAXY HM450E E4.5

The Galaxy HM450E features an abrasion-resistant rubber compound that minimizes heat build-up and extends the tread life. The solid center enhances wear, while the flat tread profile provides superior traction. The strong casing and bead area were engineered to provide high lateral stability and endure heavy loads.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
339602	1800-33		40	TL	88	13.00/1.5	73.9	20.3	216.5	32.9	55100	145	5

### GALAXY HM400S L-4S

The Galaxy HM400S is an extra-deep, smooth-treaded tire for port applications. The abrasion-resistant tread compound and large contact area ensure long life. The strong casing and high number of plies provide superior lateral stability and a high load carrying capacity.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
337455	16.00-25		32	TL	68	11.25	60.2	17	177.7	27.5	36200	145	5
337465	1800-25		40	TL	75	13.00/1.5	64.8	20.4	179	27.4	47000	145	5

### GALAXY HM-500S L-5S

The Galaxy HM500S is an extra-deep, smooth-treaded tire for reach stackers working under harsh conditions. The abrasion-resistant tread compound and large contact area ensure long life when operating on hard, abrasive port surfaces. The strong casing and high number of plies provide superior lateral stability and a high load carrying capacity.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
328465	18.00-25		40	TL	100	13.00/1.5	65.1	19.6	183.5	27.8	47700	145	5

### GALAXY PORT MAX E-4

The Galaxy Port Max is designed with an E-4 NSD and reduced weight to ensure less heat buildup in the tire in applications where fast heat build-up is experienced. Specially constructed casing resist separations between plies as well as between the tread and the casing to enable working under high stress conditions. High turn up around beads results in less flexing in the bead area, which protects the bead and minimizes the chances of failure.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
375401	12.00-24		20	TT	44.7	8.5	50.2	12.4	152.4	23.6	20500	145	5
375455	16.00-25		32	TL	65.9	11.25	60.03	18.5	182.87	27.28	36200	145	5
323465	18.00-25		40	TL	65.5	13.00/1.5	65.7	19.6	194.6	30	47700	145	5
323602	18.00-33		40	TL	65.5	13.00/1.5	73.6	19.6	218	33.8	55100	145	5

### GALAXY TERMINAL MASTER ALL STEEL

The Galaxy Terminal Master is specifically designed for high intensity terminal tractor applications including applications requiring high tractive effort.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
50501004	280/75R22.5		168A8	TL	38	7.5	39	10.8	119.8	17.8	13880	145	5
374275	310/80R22.5		175A8	TL	38	9	42.6	12.1	129.3	18.9	17110	145	5



## GALAXY HARBOR KING L-4

The Galaxy Harbor King radial is designed for the severe working conditions in ports. The flexible casing and reinforced tread area helps protect against damage and abrasion. The Galaxy Harbor King offers precise handling, a comfortable ride, and exceptional durability, providing lower operational cost.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
610893	1800R25		***	TL	82	13/2.5	65.2	19.9	195	30.9	35300	120	5

## PRIMEX HARBORMASTER IS IND-3

The Galaxy HarborMaster offers large carrying capacity, special compounding and a construction designed for high air-pressured and shock loads typical in port applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
327336	1200-20		20	TT	25	8.5	46.2	12.4	136.7	20.98	13995	127	5

## GALAXY YARDMASTER ULTRA IND-1 / IND-3

The Galaxy Yard Master Ultra is a premium service deep treaded forklift tire engineered with a heavy-duty compound and sidewall to resist abrasions, punctures and impacts in the most demanding applications. The wide, flat tread profile provides excellent stability and long tread life (Set includes tubes and flaps).



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
256021	5.00-8		10	TT	18	3.00D	18.7	5.3	53	8.3	2756	145	10
256800	18X7-8		16	TT	21	4.33R	18.3	6.8	53	8.3	4670	145	10
256039	6.00-9		10	TT	20	4.00E	21.4	6.5	61	9.5	3710	125	10
256801	21X8-9		14	TT	20	6.00E	20.4	7.4	59.9	9.3	5181	145	10
256050	650-10		12	TT	22	5.00F	23.4	7.2	67	10.4	4740	140	10
256079	700-12		12	TT	23	5	26.9	7.6	77	11.9	6000	125	10
256121	700-15		12	TT	25	6	30.2	8.3	87	13.6	6940	125	10
256127	750-15		12	TT	25	6.00G	31.8	8.7	92	14.2	7700	115	10
256134	28x9-15	8.15-15	14	TT	24	7	28	8.4	82	12.7	7520	140	10
256137	825-15		14	TT	25	6.5	33.1	9.6	95	14.7	9350	120	10
256178	250-15		16	TT	25	7.5	29.1	9.6	85	13.1	9450	135	10
256802	300-15		20	TT	30	8	33.3	11.8	95	14.8	14300	135	10
256313	9.00-20		14	TT	34	7	40.8	10.6	118	18.3	12800	100	10
256322	1000-20		16	TT	43	7.5	41.9	10.9	121	18.8	13800	115	5
256336	1200-20		20	TT	48	8.5	44.9	12.8	129	20.2	18300	145	5
256338	1200-20		28	TT	48	8.5	44.8	12.6	128	19.9	21255	145	5

## GALAXY BOSSLIFT III IND-3

The Galaxy Bosslift III is an ultra-premium-service tire that features heavy-duty construction and a super sidewall for resistance from abrasions, punctures, and impacts. The deep tread provides superior traction and long wear while its wide flat footprint gives the Bosslift III unrivaled stability and even load distribution (Set includes tubes and flaps).



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
259314	900-20		16	TT	33	7	40.9	10.2	123.1	18.7	12600	138	5
259322	1000-20		16	TT	37	7.5	42.7	11.2	128	19.3	13200	138	5
259236	1200-20		24	TT	38	8.5	44.8	13	126.9	19.4	18360	145	5

## GALAXY YARDMASTER IND 1

The Galaxy YardMaster is a premium service tire designed to operate in the most demanding applications. Engineered with a heavy duty construction to resist abrasions, punctures and impacts. The wide, flat tread profile provides excellent stability in forklift applications (Set includes tubes and flaps).



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
250021	500-8		10	TT	16	3.00D	18.5	5.2	52.7	8.2	2756	145	10
250800	18X7-8		16	TT	16	4.33R	18.3	6.6	56.8	8.8	4670	145	10
250039	6.00-9		10	TT	16	4.00E	21.4	6.5	60.9	9.5	3710	125	10
250801	21X8-9		14	TT	20	6.00E	21	8	59.9	9.3	5181	145	10
250050	650-10		12	TT	18	5.00F	23.7	7.2	67.5	10.5	4740	140	10
250079	700-12		12	TT	18	5	26.9	7.6	77	12	6000	125	10
250121	700-15		12	TT	20	6	30.2	8.4	87.4	13.6	6940	125	10
250127	750-15		12	TT	20	6.00G	31.8	8.5	91.6	14.2	7700	115	10
250134	28X9-15		14	TT	23	7	27.8	8.7	81.2	12.6	7520	140	10
250137	8.25-15		14	TT	23	6.5	33.3	9.3	95.5	14.8	9350	120	10
250178	250-15		16	TT	24	7.5	28.9	9.8	85.2	13.2	9450	135	10
250802	300-15		20	TT	37	8	33.1	11.8	95.8	14.9	14300	135	10
250021	500-8		10	TT	16	3.00D	18.5	5.2	52.7	8.2	2756	145	10
250800	18X7-8		16	TT	16	4.33R	18.3	6.6	56.8	8.8	4670	145	10
250039	6.00-9		10	TT	16	4.00E	21.4	6.5	60.9	9.5	3710	125	10
250801	21X8-9		14	TT	20	6.00E	21	8	59.9	9.3	5181	145	10
250050	650-10		12	TT	18	5.00F	23.7	7.2	67.5	10.5	4740	140	10
250079	700-12		12	TT	18	5	26.9	7.6	77	12	6000	125	10
250121	700-15		12	TT	20	6	30.2	8.4	87.4	13.6	6940	125	10
250127	750-15		12	TT	20	6.00G	31.8	8.5	91.6	14.2	7700	115	10
250134	28X9-15		14	TT	23	7	27.8	8.7	81.2	12.6	7520	140	10
250137	8.25-15		14	TT	23	6.5	33.3	9.3	95.5	14.8	9350	120	10
250178	250-15		16	TT	24	7.5	28.9	9.8	85.2	13.2	9450	135	10
250802	300-15		20	TT	37	8	33.1	11.8	95.8	14.9	14300	135	10

## GALAXY YARDMASTER RADIAL IND4

The Galaxy Yardmaster Radial has a heavy-duty tread designed for high mileage, maneuverability and stability. Its superior compound resists cuts, chips and abrasions giving it a longer tire life even on the most aggressive surfaces. The tire is built with extra protection against sidewall damage and has a special belt design for carcass durability.



PRODUCT CODE	SIZE	ALT. SIZE	PLY*	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
250346	10.00R20		NA	166A5	TL	44	7.5	42	10.3	121.7	19.3	11700	145	15
250353	12.00R20		NA	176A5	TL	49	8.5	44.9	12.8	130.6	20.7	15650	145	15
250391	12.00R24		NA	178A5	TL	49	8.5	48.5	12.8	140.2	22.2	16530	145	15

## GALAXY YARDMASTER SDS - RESILIENT SOLID TIRE ONLY

The Galaxy YardMaster SDS has a large industrial block pattern that increases life of the tread while promoting superior grip. Steel wire creel beads improve grip with rim and prevent rim slippage.



PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	TREAD	PREFERRED RIM	OD	WIDTH	MAX LOAD	MAX SPEED
STANDARD TYPE	LIP TYPE										
601022	582022	5.00-8		N/A	Solid	50	3.00D	18	4.8	3120	15
601065	582065	15x4.5-8	125/75-8	N/A	Solid	40	3.00D	14.8	4.4	2290	16
601061	582061	16x6-8	150/75-8	N/A	Solid	47	4.33R	16	5.9	3290	16
601033	582033	18x7-8	180/70-8	N/A	Solid	55	4.33R	17.9	6	4730	16
601038	582038	140/55-9		N/A	Solid	35	4.00E	14.9	5.2	2580	16
601041	582041	6.00-9		N/A	Solid	56	4.00E	20.6	5.4	4150	16
601044	582044	21x8-9	200/75-9	N/A	Solid	61	6.00E	20.4	7.4	6070	16
601095	582095	200/50-10		N/A	Solid	45	6.50F	18.2	7.5	5440	16
601051	582051	6.50-10		N/A	Solid	59	5.00F	22.2	6.4	5810	16
601036		6.50-10		N/A	Solid	59	5.50F	22.2	6.4	5810	16
601053	582053	23X9-10		N/A	Solid	64	6.50F	22.9	7.7	7600	16
601080	582080	7.00-12		N/A	Solid	64	5.00S	25.5	6.6	6640	16
601071	582071	23X10-12		N/A	Solid	63	8.00G	22.8	9.1	8240	16
601082	582082	27X10-12		N/A	Solid	78	8.00G	26.5	9.4	8530	16
601122	582122	7.00-15		N/A	Solid	65	5.5	28.5	7.1	7810	16
601125		7.50-15		N/A	Solid	77	6.5	29.6	7.6	8600	16
601129		7.50-15		N/A	Solid	77	5.5	29.6	7.6	8600	16
601133	582133	8.15-15	28x9-15	N/A	Solid	67	7	27	8.6	7590	16
601139	582139	8.25-15		N/A	Solid	81	6.5	31.9	8.3	10470	16
601842		250-15		N/A	Solid	78	7.5	28.2	9.1	10460	16
601843	582843	250-15		N/A	Solid	78	7	28.2	9.1	10460	16
601056	582056	300-15	315/70-15	N/A	Solid	95	8	32	10.1	12890	16
601312		10.00-20		N/A	Solid	99	7.5	39.8	9.9	13230	16
601319		10.00-20		N/A	Solid	99	7	39.8	9.9	13230	16
601234		12.00-20		N/A	Solid	114	8	42.9	10.5	13890	16
601335		12.00-20		N/A	Solid	114	8.5	42.9	10.4	13890	16
601399		12.00-24		N/A	Solid	116	8.5	46.5	11.1	14770	16

## GALAXY LIFTOP SDS NON-MARKING - RESILIENT SOLID TIRE ONLY

The Galaxy Liftop SDS non-marking tire is specially designed for forklifts performing severe duty applications in warehouses. Special tread design with optimum tread depth ensures grip and stability.



PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	TREAD	PREFERRED RIM	OD	WIDTH	MAX LOAD	MAX SPEED
STANDARD TYPE	LIP TYPE										
600022	560022	500-8		N/A	Solid	55	3	17.7	4.7	3120	16
600064	560064	15X41/2-8		N/A	Solid	35	3.25	14.5	4.1	2290	16
600065	560065	15X41/2-8		N/A	Solid	35	3	14.5	4.1	2290	16
600061	560061	16X6-8		N/A	Solid	39	4.33	16.0	5.5	3290	16
600033	560033	18X7-8		N/A	Solid	43	4.33	17.7	6.2	4730	16
600038	560038	140/55-9		N/A	Solid	31	4	14.8	4.9	2580	16
600041	560041	600-9		N/A	Solid	52	4	20.5	5.4	4150	16
600044	560044	21X8-9		N/A	Solid	56	6	20.5	7.4	6070	16

CONTINUED ON NEXT PAGE

## **GALAXY LIFTOP SDS NON-MARKING - RESILIENT SOLID TIRE ONLY (CONTINUED)**

PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	TREAD	PREFERRED RIM	OD	WIDTH	MAX LOAD	MAX SPEED
STANDARD TYPE	LIP TYPE										
600095	560095	200/50-10		N/A	Solid	38	6.5	17.9	7.5	5440	16
600036	560036	650-10		N/A	Solid	59	5.5	22.3	6.3	5810	16
600051	560051	650-10		N/A	Solid	59	5	22.3	6.3	5810	16
600053	560053	23X9-10		N/A	Solid	70	6.5	22.8	7.6	7600	16
600071	560071	23X10-12		N/A	Solid	50	8	22.8	9.1	8250	16
600080	560080	700-12		N/A	Solid	61	5	25.4	6.8	6640	16
600082	560082	27X10-12		N/A	Solid	64	8	26.5	9.5	8530	16
600122	560122	700-15		N/A	Solid	57	5.5	27.8	7.1	7810	16
600133	560133	815-15		N/A	Solid	63	7	26.7	8.7	7600	16
600139	560139	825-15		N/A	Solid	76	6.5	31.8	7.6	10470	16
600842	560842	250-15		N/A	Solid	69	7.5	27.8	8.7	10460	16
600843	560843	250-15		N/A	Solid	69	7	27.8	8.7	10460	16
600056	560056	300-15		N/A	Solid	91	8	31.7	9.5	12890	16

## **GALAXY LIFTOP SDS LUG - RESILIENT SOLID TIRE ONLY**

The Galaxy Lifttop SDS tire is specially designed for forklifts performing severe duty applications in warehouses. Special tread design with optimum tread depth ensures grip and stability.



PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	TREAD	PREFERRED RIM	OD	WIDTH	MAX LOAD	MAX SPEED
STANDARD TYPE	LIP TYPE										
623827	622827	400-8		NA	Solid	41	3.00D-8	16.1	4.4	1896	6
632197		9.00-20		NA	Solid	90	7.00-20	38.2	9.1	11900	6

## **GALAXY LIFTOP SDS RIB - RESILIENT SOLID TIRE ONLY**

The Galaxy Lifttop Rib SDS solid resilient tire is designed keeping in mind the needs of both forklift and baggage cart applications. Robust construction with unique tread designs ensure excellent durability and grip.



PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	TREAD	PREFERRED RIM	OD	WIDTH	MAX LOAD	MAX SPEED
STANDARD TYPE	LIP TYPE										
631827	630827	400-8		NA	Solid	41	3.00D-8	15.9	4.6	1896	6

## **GALAXY LIFTER SDS - RESILIENT SOLID TIRE ONLY**

Lifter SDS is specially designed keeping in mind the needs of forklifts performing low-intensity operations. Its robust construction is made up of high performing rubber compounds, ensuring excellent durability.



PRODUCT CODE	SIZE	PR/LI	TYPE	TREAD	PREFERRED RIM	OD	WIDTH	MAX LOAD	MAX SPEED
638022	5.00-8	N/A	Solid	50	3.00D-8	17.9	4.8	3120	16
638065	15x4½-8	N/A	Solid	40	3.00D-8	14.8	4.4	2290	16
638061	16x6-8	N/A	Solid	47	4.33R	16	5.9	3290	16
638033	18x7-8	N/A	Solid	55	4.33R	17.8	6.1	4730	16

**CONTINUED ON NEXT PAGE**



## GALAXY LIFTER SDS - RESILIENT SOLID TIRE ONLY (CONTINUED)

PRODUCT CODE	SIZE	PR/LI	TYPE	TREAD	PREFERRED RIM	OD	WIDTH	MAX LOAD	MAX SPEED
638038	140/55-9	N/A	Solid	35	4,00E	15	5.2	2580	16
638041	6.00-9	N/A	Solid	56	4,00E	20.6	5.4	4150	16
638095	200/50-10	N/A	Solid	45	6.50F	18.1	7.6	5440	16
638051	6.50-10	N/A	Solid	59	5.00F	22.2	6.5	5810	16
638053	23x9-10	N/A	Solid	51	6.50F	22.8	7.8	7600	16
638080	7.00-12	N/A	Solid	64	5.00S	25.5	6.6	6640	16
638122	7.00-15	N/A	Solid	65	5.5	27.4	7.0	7810	16
638133	28x9-15	N/A	Solid	67	7	27	8.6	7590	16
638139	8.25-15	N/A	Solid	81	6.5	31.9	8.3	10470	16
638843	250-15	N/A	Solid	78	7	28.2	9.1	10460	16
638056	300-15	N/A	Solid	95	8	32	10.1	12890	16
638319	10.00-20	N/A	Solid	99	7.5	39.7	9.8	13230	16
641319*	10.00-20	N/A	Solid	99	7.5	39.7	9.8	13230	16

\*Assembly skus (on special request)

## GALAXY YM SDS (SMOOTH) - POB SOLID

The Galaxy YM SDS press-on solid tire is specially designed to provide high lateral load carrying capacity and excellent stability. It is ideal for severe duty service performed on hard and improved industrial surfaces.



PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	WEAR LIMIT	RIM	OD	WIDTH	MAX LOAD	MAX SPEED
BLACK	NON MARKING										
635009	637009	10x5x61/2		N/A	Solid	NA	Steel Band	10	5	2237	10
635863		12X4 1/2X8		N/A	Solid	NA	Steel Band	12	4.5	1719	10
635018	637018	14x41/2x8		N/A	Solid	NA	Steel Band	14	4.5	2579	10
635008	637008	14X5X10		N/A	Solid	NA	Steel Band	14	5	2943	10
635060	637060	16x5x101/2		N/A	Solid	NA	Steel Band	16	5	3329	10
635062	637062	16x6x101/2		N/A	Solid	NA	Steel Band	16	6	4210	10
635063	637063	16x7x101/2		N/A	Solid	NA	Steel Band	16	7	5125	10
635078	637078	15x5x111/4		N/A	Solid	NA	Steel Band	15	5	3064	10
635066	637066	161/4x5x111/4		N/A	Solid	NA	Steel Band	16.25	5	3373	10
635068	637068	161/4x6x111/4		N/A	Solid	NA	Steel Band	16.25	6	4232	10
635070	637070	161/4x7x111/4		N/A	Solid	NA	Steel Band	16.25	7	5125	10
635106	637106	18x6x121/8		N/A	Solid	NA	Steel Band	18	6	4629	10
635107	637107	18x7x121/8		N/A	Solid	NA	Steel Band	18	7	5621	10
635108	637108	18x8x121/8		N/A	Solid	NA	Steel Band	18	8	6613	10
635123	637123	21x7x15		N/A	Solid	NA	Steel Band	21	7	6338	10
635140	637140	21x8x15		N/A	Solid	NA	Steel Band	21	8	7440	10
635144	637144	21x9x15		N/A	Solid	NA	Steel Band	21	9	8598	10
635148	637148	22x8x16		N/A	Solid	NA	Steel Band	22	8	7716	10
635149	637149	22x9x16		N/A	Solid	NA	Steel Band	22	9	8928	10
635157	637157	22x12x16		N/A	Solid	NA	Steel Band	22	12	12401	10
635159	637159	22x14x16		N/A	Solid	NA	Steel Band	22	14	14804	10
635160	637160	28x10x22		N/A	Solid	NA	Steel Band	28	10	12919	10
635161	637161	28x12x22		N/A	Solid	NA	Steel Band	28	12	15939	10

## MATERIAL HANDLING

### GALAXY YM SDS (TR) - POB SOLID

The Galaxy YM SDS Traction is specially constructed to fulfill requirements of severe duty operations performed in warehouse and shop-floor. Special compound ensures protection against damages while plying on industrial surfaces.



PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	WEAR LIMIT	RIM	OD	WIDTH	MAX LOAD	MAX SPEED
BLACK	NON MARKING										
605009	606009	10X5X61/2		N/A	Solid	NA	Steel Band	10	5	2237	10
605018	606018	14X41/2X8		N/A	Solid	NA	Steel Band	14	4.5	2579	10
605008	606008	14X5X10		N/A	Solid	NA	Steel Band	14	5	2943	10
605060	606060	16X5X10 1/2		N/A	Solid	NA	Steel Band	16	5	3329	10
605062	606062	16X6X10 1/2		N/A	Solid	NA	Steel Band	16	6	4210	10
605063	606063	16X7X10 1/2		N/A	Solid	NA	Steel Band	16	7	5125	10
605078	606078	15X5X11 1/4		N/A	Solid	NA	Steel Band	15	5	3064	10
605066	606066	16 1/4X5X11 1/4		N/A	Solid	NA	Steel Band	16.25	5	3373	10
605068	606068	16 1/4X6X11 1/4		N/A	Solid	NA	Steel Band	16.25	6	4232	10
605070	606070	16 1/4X7X11 1/4		N/A	Solid	NA	Steel Band	16.25	7	5125	10
605106	606106	18X6X12 1/8		N/A	Solid	NA	Steel Band	18	6	4629	10
605107	606107	18X7X12 1/8		N/A	Solid	NA	Steel Band	18	7	5621	10
605108	606108	18X8X12 1/8		N/A	Solid	NA	Steel Band	18	8	6613	10
605123	606123	21X7X15		N/A	Solid	NA	Steel Band	21	7	6338	10
605140	606140	21X8X15		N/A	Solid	NA	Steel Band	21	8	7440	10
605144	606144	21X9X15		N/A	Solid	NA	Steel Band	21	9	8598	10
605148	606148	22X8X16		N/A	Solid	NA	Steel Band	22	8	7716	10
605149	606149	22X9X16		N/A	Solid	NA	Steel Band	22	9	8928	10
605157	606157	22X12X16		N/A	Solid	NA	Steel Band	22	12	12401	10
605159	606159	22X14X16		N/A	Solid	NA	Steel Band	22	14	14804	10
605160	606160	28X10X22		N/A	Solid	NA	Steel Band	28	10	12919	10
605161	606161	28X12X22		N/A	Solid	NA	Steel Band	28	12	15939	10

### GALAXY YM SDS (LUG) - POB SOLID

The Galaxy YM SDS Lug is specially constructed to fulfill requirements of severe duty operations performed in warehouse and shop-floor. The elimination of equipment breakdown caused due to punctures and other damages ensure high productivity and equipment downtime.



PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	WEAR LIMIT	RIM	OD	WIDTH	MAX LOAD	MAX SPEED
BLACK	NON MARKING										
634009	636009	10X5X61/2		N/A	Solid	NA	Steel Band	10	5	2237	10
634018	636018	14X41/2X8		N/A	Solid	NA	Steel Band	14	4.5	2579	10
634008	636008	14X5X10		N/A	Solid	NA	Steel Band	14	5	2943	10
634060	636060	16X5X10 1/2		N/A	Solid	NA	Steel Band	16	5	3329	10
634062	636062	16X6X10 1/2		N/A	Solid	NA	Steel Band	16	6	4210	10
634063	636063	16X7X10 1/2		N/A	Solid	NA	Steel Band	16	7	5125	10
634078	636078	15X5X11 1/4		N/A	Solid	NA	Steel Band	15	5	3064	10
634066	636066	16 1/4X5X11 1/4		N/A	Solid	NA	Steel Band	16.25	5	3373	10
634068	636068	16 1/4X6X11 1/4		N/A	Solid	NA	Steel Band	16.25	6	4232	10
634070	636070	16 1/4X7X11 1/4		N/A	Solid	NA	Steel Band	16.25	7	5125	10

CONTINUED ON NEXT PAGE

**GALAXY YM SDS (LUG) - POB SOLID (CONTINUED)**

PRODUCT CODE		SIZE	ALT	PR/LI	TYPE	WEAR LIMIT	RIM	OD	WIDTH	MAX LOAD	MAX SPEED
BLACK	NON MARKING										
634106	636106	18X6X12 1/8		N/A	Solid	NA	Steel Band	18	6	4629	10
634107	636107	18X7X12 1/8		N/A	Solid	NA	Steel Band	18	7	5621	10
634108	636108	18X8X12 1/8		N/A	Solid	NA	Steel Band	18	8	6613	10
634123	636123	21X7X15		N/A	Solid	NA	Steel Band	21	7	6338	10
634140	636140	21X8X15		N/A	Solid	NA	Steel Band	21	8	7440	10
634144	636144	21X9X15		N/A	Solid	NA	Steel Band	21	9	8598	10
634148	636148	22X8X16		N/A	Solid	NA	Steel Band	22	8	7716	10
634149	636149	22X9X16		N/A	Solid	NA	Steel Band	22	9	8928	10
634157	636157	22X12X16		N/A	Solid	NA	Steel Band	22	12	12401	10
634159	636159	22X14X16		N/A	Solid	NA	Steel Band	22	14	14804	10
634160	636160	28X10X22		N/A	Solid	NA	Steel Band	28	10	12919	10
634161	636161	28X12X22		N/A	Solid	NA	Steel Band	28	12	15939	10





# **GOLF AND TURF**

## **OPTIMAL PERFORMANCE WITH MINIMAL SURFACE IMPACT**

From golf courses to cemeteries, turf tires must rise to the challenge of performing on heavy equipment while leaving no hint that they were ever there. It takes meticulous design and dedicated craftsmanship to create tires that can minimize damage to sensitive turf and sugar sand surfaces.







**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

## GALAXY MIGHTY MOW R-3

OEM FITMENT

The Galaxy Mighty Mow is engineered to provide superior flotation resulting in a turf friendly tire that will not damage grass or roots. The Mighty Mow works exceptionally well on equipment for lawns, parks, golf courses, playing fields, and cemeteries.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
135848	23X8.50-12		4	TL	11	7	22.6	8.6	62.3	10.2	1477	35	6
135045	23X8.50-14		6	TL	13	7	23.2	8.1	70	10.7	1430	33	15
135141	27X8.50-15		6	TL	13	7	26.8	8.4	79	12.3	2090	45	20
135135	27X8.50-15		12	TL	13	7	27	8.7	81.3	12.4	2469	45	6
135138	27X10.50-15		4	TL	13	8	27.3	10.2	82	12.7	1475	30	20
135845	29X12.50-15		4	TL	13	10LB	29.2	12.2	86	13.4	1320	20	25
135223	9.5-16		6	TL	19	W8	32.3	9.5	91	14.1	1390	30	25
135245	12.4-16		6	TL	21	W10L	36.3	12.4	108	16.4	1820	24	5
135249	21.5L-16.1SL		6	TL	30	W18	44.5	21.5	125	19.4	4409	16	30
135259	10-16.5		8	TL	18	8.25	30.7	10.4	93	14.2	3500	45	5
135262	12-16.5		4	TL	18	9.75	32.9	12.5	97	15	3220	25	5
135266	12-16.5		12	TL	17	9.75	32.8	12.5	99	15	4189	40	5
135274	14-17.5		6	TL	21	10.5	35.9	13.3	105	16.1	8550	30	5
135278	14-17.5NHS		14	TL	21	10.5	35.9	13.3	105	16.1	4806	29	6
135343	41X14.00-20		4	TL	24	11	41.9	13.8	126	19.1	4080	25	20
135875	44X18.00-20		4	TL	25	14	44.6	18	130	20.2	3525	20	25
135433	17.5L-24		8	TL	25	W15L	47.4	17.6	146	22.2	5360	26	25
135439	19.5L24		12	TL	26	W17	51.7	19.5	155	23.5	5203	29	25

## GALAXY GARDEN PRO R-3+

OEM FITMENT

The Galaxy Garden Pro is a mixed-service radial tire developed specifically for small tractors used in gardening, orchards, and vineyards. The Garden Pro is also designed to be used on hard surfaces for transporting produce and materials.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
517275	215/45R10	18X8.50R10	80	TL	TBA	TBA	TBA	TBA	TBA	TBA	TBA	TBA	TBA
579750	220/55R12		82A8	TL	16	7	21.7	8.7	64.5	9.9	1050	35	25
517286	315/55R12	26X12.00R12	85B	TL	22	10.5	25.3	12.1	73.5	11.4	1130	15	25
579751	240/60R12	23-950-12	89A8	TL	14	7	23.3	9.4	69.4	10.6	1280	35	25
579743	220/55R14	23-859-14	93A8	TL	16	7JA	23.3	8.7	69.5	10.2	1430	55	25
517100	215/65R14	25X8.50R14	90B	TL	22	7	24.9	8.5	73.4	11.4	1320	30	25
517099	215/70R15	27X8.50R15	90B	TL	22	7	27.0	8.5	78.9	12.5	1320	26	25
579748	200/60R15		83A8	TL	14	6	24	7.8	72	11.2	1230	43	30
579689	200/65R16		94A8	TL	25	W6	26.2	7.8	77.5	12.1	1480	35	25
579746	200/70R16		94A8	TL	25	W6	27	7.8	79.9	13	1477	35	25
579745	240/70R16		104A8	TL	28	W8	29.1	9.6	86.2	13.6	1984	35	25
579754	260/70R16		109A8	TL	29	W8	30.3	10.2	90.4	13.8	2270	35	25
579755	280/70R16		112A8	TL	30	W9	31.5	11.1	93.9	14.3	2470	35	25

CONTINUED ON NEXT PAGE

\* All sizes marked TBA will be updated on final tire release. Go to [atgtire.com](http://atgtire.com) for the most recent tire specifications.

## GALAXY GARDEN PRO R-3+ (CONTINUED)

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
517101	265/70R16.5	10R16.5	105B	TL	34	8.25	31.1	10.4	92.4	14.0	2040	29	25
517298	305/70R16.5	12R16.5	105B	TL	34	9.75	33.0	12.5	95.5	14.8	2040	23	25
517316	355/65R17.5	14R17.5	130B	TL	TBA	TBA	TBA	TBA	TBA	TBA	TBA	TBA	TBA
579688	320/65R18		109A8	TL	31	W10	34.4	12.2	101.4	15.3	2270	23	25
579808	260/70R18		114A8/B	TL	32	18	32.3	10.2	96.9	15.1	2600	41	30
517304	385/65R19.5	15R19.5	130B	TL	32	11.75	39.0	15.5	115.0	17.6	4190	35	25
579758	300/70R20		110A8	TL	31	W9	37.6	11.6	112.2	17.1	2340	23	25
579757	320/70R20		113A8	TL	32	W10	38.7	12.9	115.2	17.6	2540	23	25
579807	380/70R20		122A8/B	TL	32	20	42.6	15	127.4	19.7	3300	23	30
517256	400/70R20	43X16.00R20	130B	TL	TBA	TBA	TBA	TBA	TBA	TBA	TBA	TBA	TBA
579726	125/90R22		98A8	TL	20	22	30.9	5	94.5	14.7	1650	52	25
579779	360/70R24	12.4R24	122A8	TL	32	W11	45.4	14.2	135.4	21.1	3300	23	25
579760	380/70R24	13.6R24	125A8	TL	34	W12	46.9	15	139.6	21.3	3640	23	25
579781	420/70R24	14.9R24	130A8	TL	35	W13	49.1	16.5	146.4	22.2	4180	23	25
517913	420/85R24	16.9R24	130	TL	TBA	TBA	TBA	TBA	TBA	TBA	TBA	TBA	TBA
517912	460/70R24	17.5LR24	139B	TL	38	W15L	49.4	18.3	145.0	22.0	5350	29	25
517911	500/70R24	19.5LR24	140B	TL	38	W16L	51.6	19.8	147.9	21.4	6120	23	25
579770	320/85R28	12.4R28	124A8	TL	30	W10	49.3	12.9	147.2	22.1	3520	23	25
579771	340/85R28	13.6R28	127A8	TL	32	28	50.7	13.5	151	23.9	3850	23	30
579783	360/70R28	12.4R28	125A8	TL	33	W11	49.3	14.1	148.3	22.6	3640	23	25
579786	480/70R28	16.9R28	140A8/B	TL	32	28	55.9	18.9	165.7	24.9	5510	23	30
579788	480/70R30	16.9R30	141A8/B	TL	37	30	58.2	18.9	174	26.3	5670	23	30
579790	480/80R34	16.9R34	143A8/B	TL	37	W15	62.2	18.9	185.6	28.5	4190	35	25

## GALAXY MIGHTY MOW-TS

The Galaxy Mighty Mow is engineered to provide superior flotation resulting in a turf friendly tire that will not damage grass or roots. The Mighty Mow works exceptionally well on equipment for lawns, parks, golf courses, playing fields, and cemeteries.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
485040	16X6.50-8		4	TL	9	5.4	16.1	6.5	47.4	7.1	617	28	9
485043	16X7.50-8		4	TL	9	5.4	16.1	7.1	47.7	7.1	675	24	9
485035	18X8.50-8		4	TL	9	7	18.3	8.3	53	8.1	827	22	9
485048	18x9.50-8		6	TL	9	8	18.3	8.8	53.4	8	1294	36	9
485073	20X10-8		4	TL	9	8	20	10.4	59.3	9	545	22	9
485047	18X8.50-10		4	TL	9	7	17.5	8.5	51.9	7.9	827	22	9
485057	18X10.50-10		4	TL	10	8.5	17.7	10.2	51.9	7.9	994	20	9
485074	20X10-10		6	TL	10	8	20.1	9.8	58.3	9.1	1433	32	9
485081	23x8.50-12		6	TL	11	7	23	8.6	67.3	10.2	1433	34	9
485075	23x10.50-12		6	TL	12	8.5	22.6	10.2	65.9	9.8	1764	32	10
485076	24X12-12		4	TL	12	8.5	23.8	11.4	70.6	10.4	1709	20	9
485087	26X12-12		4	TL	12	10.5	25.2	11.8	73	11	1764	20	9
485088	26X12-12		8	TL	12	10.5	25.2	11.8	73	11	1764	20	9



# GALAXY TURF SPECIAL R-3

**OEM FITMENT**

The Galaxy Turf Special was designed to leave less of a mark on the greens than a standard directional tread. We incorporated the feedback of golf course superintendents from a variety of geographical locations to develop the most sought after golf, turf and sand tires in the industry. Today, the Galaxy Turf Special has set the standard for flotation and minimized surface disturbance.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	PLY/*	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
480089	24X13LL-12		4		TL	7	10.5	23.6	12.1	68.6	10.5	1230	10	
480150	25X10.50LL-15		6		TL	10	8	25.3	10.3	75.8	11.6	1020	10	
480151	27X10.50LL-15		6		TL	8	8	26.7	10.6	81	12.4	965	58	
480158	27X12LL-15		6	114A3	TL	10	10	26.7	12.2	79.7	12.2	1150	8	
551337	27X14LL-15		6		TL	10	12	27.1	14.1	79.7	12.2	1150	6	
480232	12LL-16		6		TL	8	10	32.8	11.5	99	15	1360	6	
480250	22.5LL-16.1		6		TL	12	18	44.6	21.7	125	19.5	3740	6	
480243	33X16LL-16.1		10		TL	9	14	32.8	16.5	99	15	5080	38	
480247	33X18LL-16.1		10		TL	9	16	33.3	18.6	100	15.2	5520	34	
480246	41X18LL-16.1		6		TL	12	16	41.8	19.1	118	18.3	2680	6	
480373	41X18LL-22.5		14		TL	15	14	41.8	19.9	116.3	17.8	9100	50	
480362	41X18LL-22.5		20		TL	12	14	40.6	19	120	18.7	11350	70	

**WE ALSO OFFER LARGER SIZES APPROPRIATE TO TURF APPLICATIONS IN THE AGRICULTURAL SECTION OF THIS CATALOG. CHECK OUT PAGE 56 FOR OTHER GREAT GALAXY OPTIONS.**







# FORESTRY

## MAXIMUM PERFORMANCE FOR THE TOUGHEST CONDITIONS

Mud, snow, stumps, rocks and a thousand other hazards make it easy for tires to get lost in the woods. Primex forestry tires are built to perform in the toughest conditions, providing grip and flotation day after day, season after season. Primex offers one of the industry's largest ranges of designs and sizes, including tires purpose-built for equipment ranging from skidders to massive CTL rigs—and features including super-tough Aramid (KEVLAR®) and steel reinforced carcasses.







**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

## PRIMEX LOGSTOMPER EXTREME

OEM FITMENT

The Primex LogStomper Extreme features a variable-angle lug design that is tapered from the center to the shoulder. This delivers excellent hillside stability, superior traction, and exceptional performance in varied ground conditions. The Extreme is engineered with a highly cut- and chip-resistant compound, a heavy sidewall, and a deep undertread for added protection in demanding service.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
462501	66X4300-25		20	TL	117	DW36A	69.5	41.5	202.3	30.9	14771	51	31
462497	67X3400-25		20	TL	115	30.0TH	68.8	34	199.2	30.1	14771	55	30
461512	23.1-26		16	TL	68	DW20A/B	63	23.3	190	29.3	13900	40	5
461518	28L-26		20	TL	73	DW25A/B	63.6	27.4	190	29.3	16000	40	5
462521	66x43.00-26		20	TL	120	DW36B	68.8	41.5	199.4	30.2	14770	50	30
462520	67x34.00-26		20	TL	120	DW30A	69.2	33.8	200.8	30.4	14770	55	30
461917	30.5L-32		26	TL	82	DH27/DH27H	72	29.9	216.1	33.6	22000	45	5
461916	30.5-32		32	TL	82	DH27/DH27H	72.7	30.5	190.4	27.3	19100	49	10
461921	35.5L-32		26	TL	84	DH31/DH31H	78	35	234.3	36.2	19750	35	10
461938	35.5-32		32	TL	84	DH31/DH31H	78	35	234.7	36.3	22500	44	10
462593	73X4400-32		20	TL	92	DH36.00	76	44	209.8	33.6	17637	51	30

## PRIMEX LOGMONSTER LS-2

OEM FITMENT

The Primex LogMonster LS-2 was developed to work under extreme terrain conditions and provides high traction and low slippage. It is built with steel belts, deep under tread, and a special tread compound for long wear and reliable service.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
464509	18.4-26		16	TT	67	DW16A	56.9	18.4	170	26.3	7826	40	19
464512	23.1-26		16	TL	69	DW20A/B	63.4	23.1	188.2	28.9	13900	40	5
465512	23.1-26		16	TL	69	26	63.38	23.11	191.41	29.5	9910	35	20
464518	28L-26		20	TL	69	DW25A/B	64.5	28.1	191.4	29.4	16000	40	5
464564	16.9-30		16	TT	63	DW15A	59.2	16.9	177.1	27.6	7385	47	19
464569	18.4-30		16	TT	67	DW16A	60.9	18.5	182.5	28.6	8047	40	19
464583	24.5-32		20	TL	80	DW21	72.1	24.5	215	32.9	12787	39	19
464917	30.5-32		26	TL	69	DH27/DH27H	72.7	30.5	217	33.3	22000	45	5
464921	35.5-32		26	TL	82	DH31/DH31H	79.1	35.3	235	36.2	27,00	40	5
464614	18.4-34		16	TT	67	DW16A	65.2	18.4	199	30.4	8267	40	19
464649	18.4-38		16	TT	67	DW16A	69.2	18.4	209.1	32.7	8543	45	19

## PRIMEX LOGSTOMPER FX23 HF-4

The Primex LogStomper FX23 is steel belted and has wide 23-degree lugs, and a reinforced sidewall for outstanding traction and puncture resistance.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
450594	78X4500-32		20	TL	80	41	78	45	231.2	34.7	24640	25	5





# **AGRICULTURE**

## **RUGGED CONSTRUCTION FOR EVERY JOB ON THE FARM**

Easy on the environment but tough in the field, Galaxy agricultural tires deliver outstanding performance and value—for nearly any job on the farm. Rugged construction, deep treads and top design keep farm machinery moving in whatever Mother Nature throws at them, and help keep the profit in the challenging farming industry.







**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

# GALAXY EARTHPRO RADIAL R-1W

**OEM FITMENT**

The Galaxy EarthPro Radial tire has a highly versatile and modern design providing excellent road wear and ride comfort while at the same time providing high traction in the field. The pads between the lugs act as mud breakers. Also, the reinforced lug and bead areas and improved tread compound provide exceptional working life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
575764	280/70R20		116A8/B	TL	41	W9	35.9	10.9	106.5	16.3	2760	35	30
536028	280/85R20		112A8/B	TL	48	W10	38.7	11.3	114.7	17.6	2400	23	30
575758	300/70R20		120A8/B	TL	41	W10	37.6	11.5	111.5	17.1	3080	35	30
575759	320/70R20		123A8/B	TL	42	W10	38.8	12.8	114.5	17.5	3420	35	30
536029	320/85R20		119A8/B	TL	50	W11	41.1	13	121.8	18	3000	23	30
536766	280/85R24		115A8	TL	49	W9	42.8	10.6	129	19.5	2680	23	30
575778	320/70R24		116A8/B	TL	51	W10	43.1	12.6	127.1	19.6	2760	23	30
536767	320/85R24		122 A8	TL	52	W10	45.2	13.2	134	20.3	3300	23	30
536768	340/85R24		125 A8	TL	53	W11	46.5	14	138	20.9	3640	23	30
575779	360/70R24		122A8/B	TL	52	W11	45.2	14.1	133.3	20.6	3300	23	30
575780	380/70R24		125A8/B	TL	53	W12	46.9	15	138.2	21.2	3640	23	30
536769	380/85R24		131A8	TL	57	W12	49.3	15.2	145	21.9	4300	23	30
575781	420/70R24		130A8/B	TL	54	W13	49.1	16.5	144.9	22.1	4180	23	30
536931	420/85R24		131A8	TL	60	W13	52.1	16.7	151	22.8	4300	23	30
525571	480/65R24		140D	TL	58	W15L	48.8	18.9	147.6	21.9	5510	35	40
580792	480/70R24		138A8/B	TL	58	W15L	51.8	18.9	151.9	23.1	5200	23	30
575782	320/70R28		119A8/B	TL	51	W10	46.9	12.6	138.4	21.5	3000	23	30
536770	320/85R28		133 A8	TL	52	W10	49.1	12.8	147	22.2	3520	23	30
536771	340/85R28		127A8/B	TL	53	W11	51	14.2	151	22.8	3860	23	30
575783	360/70R28		125A8/B	TL	52	W11	48.8	14.1	144	22.5	3640	23	30
575784	380/70R28		127A8/B	TL	53	W12	50.9	15	150.2	23.2	3860	23	30
536772	380/85R28		133A8	TL	57	W12	53.4	15	157	157	4540	23	30
570785	420/70R28		133A8/B	TL	54	W13	53.1	16.5	156.7	24.1	4540	23	30
536906	420/85R28		139A8	TL	60	W13	56.1	16.5	164	24.8	5360	23	30
525556	480/65R28		142D	TL	58	W15L	52.6	18.9	157.7	24.4	5840	35	40
575786	480/70R28		140A8/B	TL	58	W15L	55.7	18.9	164.3	25.2	5520	23	30
525572	540/65R28		149D	TL	63	W16L	55.6	21.7	170.3	24.9	7160	35	40
525563	600/65R28		154D	TL	60	W18L	58.3	23.3	175.6	26.3	8260	35	40
536928	380/85R30		135A8	TL	57	W12	55.4	14.7	164	24.8	4800	23	30
575787	420/70R30		134A8/B	TL	54	W13	55	16.5	162.4	25	4680	23	30
536773	420/85R30		140A8/B	TL	60	W13	57.8	17	171	25.9	5520	23	30
536929	420/90R30		147A8	TL	60	W13	59.8	16.5	176.3	26.9	6800	23	30
536836	460/85R30		145A8/B	TL	64	W14	60.4	18.7	178	26.9	6400	23	30
575788	480/70R30		141A8/B	TL	58	W15L	58.2	18.9	171.7	26.3	5680	23	30
575789	520/70R30		145A8/B	TL	59	W16L	60.5	20.3	178.4	27.2	7600	23	30
525570	540/65R30		150D	TL	63	W16L	58.5	21.7	177.3	26.6	7380	35	40
536306	320/85R32		136A8	TL	50	W11	53.4	12.8	158.1	24.6	3740	23	30

CONTINUED ON NEXT PAGE



## GALAXY EARTHPRO RADIAL R-1W (CONTINUED)

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
536932	380/85R34		137A8	TL	57	W12	59.4	15	177	26.8	5080	23	30
536774	420/85R34		140A8/B	TL	57	W13	62.4	16.5	186	28.1	5840	23	30
536775	460/85R34		147A8	TL	64	W14	64.8	17.9	189	28.7	6800	23	30
575790	480/70R34		143A8/B	TL	58	W15L	62.2	18.9	183.5	28.3	6000	23	30
575791	520/70R34		148A8/B	TL	59	W16L	64.6	20.3	190.5	29.3	6950	23	30
536324	320/85R36		128A8	TL	50	W11	57.4	12.8	169.9	26.6	3960	23	30
536833	340/85R36		132A8	TL	52	W12	58.9	13.6	174.2	27.1	4400	23	25
536326	320/85R38		143A8	TL	50	38	59.4	12.8	178.4	27.6	6000	52	25
536030	340/85R38		133A8	TL	50	W12	60.7	13.6	179.8	28.1	4540	23	25
536933	380/80R38		142 A8/142 B	TL	58	38	62.1	14.8	185.9	28.7	5840	35	25
536776	420/85R38		144A8	TL	57	W13	66.1	16.3	197	29.8	6150	23	30
536777	460/85R38		149A8	TL	64	W14	68.8	17.9	203	30.8	7150	23	30
575794	480/70R38		145A8/B	TL	58	W15L	66.2	18.9	195.2	30.3	6400	23	30
575796	480/70R38		155A8/B	TL	58	W15L	66.2	18.9	195.2	30.3	8550	23	30
536795	520/70R38		150A8/B	TL	59	W16L	69.1	20.3	203.8	31.4	7400	23	30
536837	520/85R38		155A8	TL	68	W16A	72.8	20.7	216	32.7	8550	23	30
525561	540/65R38		153D	TL	63	W16L	65.9	21.1	200.4	30.2	8040	35	40
525558	600/65R38		159D	TL	60	W18L	68.9	23.3	212.7	31.5	9640	35	40
525555	650/65R38		171D	TL	64	38	72.2	25.4	197.2	28.9	13550	51	40
570785	710/70R38		133A8/B	TL	54	28	53.1	16.5	157.1	24.1	4540	23	25
536934	320/80R42		141A8/B	TL	53	W10	62.2	12.6	184.1	29.1	5677	46	25
538323	320/90R42		147A8	TL	53	W10	64.7	12.6	194.5	30.1	6800	52	30
536904	480/80R42		151A8	TL	66	W16A	72.2	18.9	215	32.6	7600	23	30
536935	520/85R42		157A8/B	TL	68	W16A	76.8	20.3	227	34.4	9100	23	30
525557	650/65R42		170D	TL	66	DW20B	76.4	26.2	232.9	35.2	13220	46	40
517999	710/70R42		173A8/B	TL	74	DW23	81.1	28.2	239.4	36.9	14300	35	25
536922	320/90R46		148A8/B	TL	54	W10	68.7	12.6	212	32.1	6950	52	30
536918	380/90R46		165A8	TL	59	W13B	72.9	15	221	33.5	10700	68	30
536996	480/80R46		158A8	TL	66	W16A	76.2	18.9	228	34.6	9350	23	30
536997	520/85R46		158A8	TL	68	W16L	80.8	20.3	240	36.4	9350	23	30
494663	480/80R50		159D	TL	66	W15L	81.1	18.9	242.4	37.3	9640	35	40

## GALAXY 350 ROWSTAR RADIAL R-1

The Galaxy 350 Rowstar is the market-leading high-clearance tire designed for all types of cultivation, harvesting, and spraying jobs. The strong casing and rigid belts coupled with radial construction provide unbeatable performance. (TUBELESS)



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
507241	230/95R32		131A8/128D	TL	44	W8	49.8	9.5	149.5	22.9	3970	52	25
507235	230/95R48		139A8/136D	TL	44	W8	64.9	9.5	201.5	31	4940	52	25

# GALAXY EARTHPRO BIAS R-1

**OEM FITMENT**

The Galaxy EarthPro R-1 has a 23-degree tread to provide maximum traction while the distinct terracing in the space between the lugs was designed to enhance self cleaning and provide constant traction in soft soil and mud. The state-of-the-art neutral casing design minimizes stresses from the uninflated to the inflated tire, resulting in enhanced long-term reliability.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
518926	11.2-24		8	TL	43	W10	43.5	11.2	133	20.1	2540	36	25
518406	12.4-24		8	TL	45	W11	45.9	12.6	139	21.1	2830	32	25
518670	13.6-24		8	TL	46	W12	47.9	13.6	141	21.6	3080	28	25
518425	14.9-24		8	TL	46	W13	49.8	15.2	146	22.4	3520	26	25
518430	16.9-24		8	TL	50	W15L	52.4	16.9	157	23.8	4080	24	25
518543	14.9-28		8	TL	46	W13	54.3	14.6	161	24.6	3740	26	25
518966	16.9-28		8	TL	50	W15L	56.5	16.9	160.3	25.9	4300	25	25
518708	16.9-30		6	TL	49	W15L	58.4	16.9	173	26.4	4400	24	25
518559	16.9-30		8	TL	49	W15L	58.4	16.9	173	26.4	4400	24	25
518566	18.4-30		8	TL	50	W15L	60.1	18.5	181	27.5	4800	20	25
518975	23.1-30		12	TL	54	DW20B	67.2	23.1	198	30.2	7610	25	25
518582	24.5-32		12	TL	55	DW21	71	24.5	215.3	31.9	8820	25	25
518611	18.4-34		8	TL	50	W16L	64.3	18.4	191	29.2	5080	20	25
518637	13.6-38		8	TL	47	W12	61.7	13.7	190	28.8	3860	28	25
518641	15.5-38		8	TL	45	W14L	61.9	15.5	186	28.5	4080	26	25
518643	16.9-38		8	TL	50	W15L	66.5	16.9	197.2	30.7	4940	33	25
518645	18.4-38		8	TL	50	W15L	68.6	18.2	205	31.3	5360	20	25
518669	20.8-38		8	TL	53	W18A	72.2	20.8	211.5	32.4	6170	18	25
518578	20.8-38		10	TL	53	W18A	72.2	20.8	211.5	32.4	6950	22	25

# GALAXY EARTHPRO 45 R-1

The Galaxy EarthPro 45 has an optimized 45-degree lug angle to ensure good roadability while on the road and superior self cleaning in the field. Engineered with compounds to reduce wear, with extra rubber in lug centers to extend tire life. Additional rubber layer improves penetration resistance. Tougher sidewall provides deflection stability and protection from external damages.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
540979	9.5-20		6	TT	35	W8	37	9.5	112	17.4	1819	30	25
540692	8.3-24		8	TT	35	W7	39.2	8.3	119.2	18.5	2039	46	25
540375	9.5-24		8	TT	39	W8	41.3	9.4	125	19.3	2469	41	25
540925	11.2-24		8	TT	41	W10	43.1	11.2	131.8	20.4	2756	35	25
540664	12.4-24		8	TT	43	W11L	49.6	12.4	136.2	21	3197	33	25
540733	13.6-24		8	TT	44	W12	47.6	13.6	142.9	21.7	3417	29	25
540670	13.6-24		8	TL	45	W12	47.63	13.58	142.9	21.65	3410	29	25
540684	14.9-24		8	TT	47	W13	49.8	14.9	147.4	22.6	3968	26	25
540765	16.9-24		8	TT	48	W15L	52.6	16.9	157.4	23.6	4542	25	25
540818	11.2-28		8	TT	41	W10	47.4	11.2	144.9	22.3	2910	35	25
540819	12.4-28		8	TT	43	W11L	49.6	12.4	148.6	23	3417	33	25
540856	13.6-28		8	TT	44	W12	51.6	13.6	157.2	24.3	3638	29	25
540685	14.9-28		8	TT	47	W13	49.8	14.9	147.4	22.6	3968	26	25

CONTINUED ON NEXT PAGE

## GALAXY EARTHPRO 45 R-1 (CONTINUED)

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
540970	16.9-28		8	TT	48	W15L	56.5	16.9	169.2	25.6	4806	25	25
540560	16.9-30		8	TT	48	W15L	58.5	16.9	175.9	26.6	5071	25	25
540567	18.4-30		8	TT	48	W16L	61	18.3	178.9	27.4	5357	20	25
540608	16.9-34		8	TT	48	W15	62.6	16.9	185.8	28.5	5357	25	25
540612	18.4-34		8	TT	48	W16L	65.4	18.4	193.3	29.1	5842	20	25
540962	12.4-36		8	TT	43	W11	57.9	12.4	175.2	27.0	3750	35	25
540642	15.5-38		8	TT	43	W14L	61.8	15.5	187.7	28.9	4542	26	25
540705	15.5-38		12	TT	43	W14L	61.8	15.5	189.1	29	5680	40	25
540666	16.9-38		8	TT	48	W15L	66.5	16.9	199.6	30.3	5677	25	25
540646	18.4-38		8	TT	48	W16L	68.9	18.4	204.3	31.1	6008	20	25

## GALAXY AGRI TRAC II R-1

OEM FITMENT

The Galaxy AGRI Trac II provides proven traction in the field and has been engineered with a wear-resistant compound. As a result of this combination, the AGRI Trac has been selected as an OEM fitment tire.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
572093	180/95-14		97A6	TL	33	14	27.5	6.8	80.6	12.5	1610	36	20
572201	7.0-16		6	TL	30	6LB	29.2	7.2	90.2	13.9	1100	36	19
572213	8.0-16		6	TL	31	6LB	31.1	8.3	94.1	14.5	1350	28	19
572223	9.5-16		6	TL	36	W8L	33.3	9.5	99.4	15.4	1520	30	19
572706	9.5-24		6	TL	39	W8L	41.3	9.5	126.4	19.2	1870	30	25
572396	11.2-24		6	TL	42	W10	43.4	11.4	132	20	2340	26	25
572926	11.2-24		8	TL	42	W10	43.4	11.4	132	20	2540	36	25
572406	12.4-24		8	TL	43	W11	45.6	12.4	138.4	21	4800	20	25
572419	16.9-24		6	TL	48	W15	52.6	16.9	153.3	23.8	3370	17	25
572539	13.6-28		6	TL	43	W12	51.2	13.6	152.9	23.5	3197	23	19
572541	14.9-28		6	TL	48	W13	53.8	14.9	162.9	24.7	3200	20	25
572549	16.9-28		6	TL	45	W15	56.5	16.9	165	25.5	3640	18	25
572708	16.9-30		6	TL	45	W15	58.3	16.9	175	26.8	3740	18	25
572566	18.4-30		8	TL	48	W16L	61.1	18.4	184	27.9	4800	20	25
572569	18.4-30		16	TT	48	W16L	61.1	18.4	85.8	27.9	8530	45	25
572609	16.9-34		8	TL	50	W15	62.3	16.9	189.1	28.7	4680	24	25

## GALAXY 347 BIAS R-1

OEM FITMENT

The Galaxy 347 Bias is a drive wheel tractor tire with higher number of 23 degree lugs. It provides maximum traction on all types of soil and provides a smooth drive. A strong nylon carcass guards against mechanical failures and moisture deterioration. The tire is engineered with breakers for better protection against punctures.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
535980	9.5-22		6	TT	35	W8	39.2	9.5	118.6	18.4	1980	32	25
535508	18.4-26		12	TL	62	26	57.1	18	167.1	25.4	5680	32	25
535682	18.4-26	480/80-26	10	TT	49	W16L	57.1	18.4	167.1	25.4	5840	26	25

CONTINUED ON NEXT PAGE

## GALAXY 347 BIAS R-1 (CONTINUED)

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
535971	18.4-26	480/80-26	12	TT	49	W16L	57.1	18.4	167.1	25.4	6600	33	25
535511	23.1-26	600/75-26	12	TL	54	DW20	63.2	23.1	183	27.7	8050	24	25
535513	23.1-26	600/75-26	16	TT	54	DW20	63.2	23.1	183	27.7	9650	33	25
535969	16.9-30	420/85-30	12	TT	48	W15L	58.5	16.9	172	26.3	6400	36	25
535857	18.4-34	460/85-34	10	TT	49	W16L	65	18.4	192.2	29.4	6600	26	25
535963	13.6-36		8	TT	46	W12	59.6	13.6	179.1	27.7	4300	30	25
535632	12.4-38		6	TT	44	W11	59.6	12.4	180.2	28	3300	25	25
535665	13.6-38		8	TT	46	W12	61.6	13.6	185.4	28.7	4300	29	25
535690	14.9-38		8	TT	47	W13	63.6	14.9	190.7	29.4	4800	26	25
535579	20.8-38	520/85-38	8	TT	53	W18L	72.4	20.8	213	32.5	6950	19	25

## GALAXY IRRIGATION BIAS R-1

The Galaxy Irrigation Bias has ideally spaced 23-degree lugs for superior traction in irrigation use. Strong and wide lugs provide traction due to larger contact area. Strong sidewall construction and a durable nylon carcass minimizes mechanical failure and ozone damage.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
519396	11.2-24		6	TL	31	W10	43.5	11.2	130.5	20.2	2330	26	10
519425	14.9-24		8	TL	35	W13	49.2	14.9	145.7	22.6	3960	26	10
519631	11.2-38		6	TL	30	W10	57.4	11.2	172.83	27.5	2600	26	10

## GALAXY SUPER SOFT R-3

**OEM FITMENT**

The Galaxy Super Soft R-3 tires are ideal for pull-type scrapers, fertilizer and lime spreaders, rough mowing tractors, balers, swathers and air seeders. Over the years, these tires have continually been improved, strengthened, and enhanced to provide the very best performance for various agricultural and industrial machines.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
513251	22.5L-16.1		10	TL	32	W18	47.1	22.1	130	20.5	5271	22	10
526252	22.5L-16.1		14	TL	32	W18	47.1	22.1	133	20.5	8685	34	10

## GALAXY RADIAL SUPER SOFTEE I-2

**OEM FITMENT**

The Galaxy Radial Super Soft is perfect for pull-type agricultural implements. It is build with a large block type tread to maximize contact with the ground and reduce surface disruption and compaction.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
539943	750/60R26		175A8	TL	43	DW25	62.6	29.5	178.9	28.1	15212	58	25
539942	850/50R32		195A3	TL	38	DH27A	65.9	33.4	194	29.4	17600	48	25



## GALAXY HONEY WAGON I-3

OEM FITMENT

The Galaxy Honey Wagon features exceptional flotation and rounded shoulders for minimal soil compaction. The Honey Wagon has been selected as an OEM fitment by several spreader manufacturers.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
558671	725X65-26		20	TL	38	DW25A	61.7	29.1	176	27.3	17400	45	25

## GALAXY COMPACTOR R-3

OEM FITMENT

The Galaxy Compactor R-3 has blocks specifically designed for compactors and the abuse they endure. It is also suited for on-the-road industrial and other construction equipment. The multi-purpose design provides high flotation and traction on hard surfaces.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
534511	23.1-26		12	TL	24	DW20A/B	59.4	22.9	176.1	26.7	7150	24	25

## GALAXY R-3 (329)

The Galaxy 329 has a diamond tread pattern and is built with a strong nylon construction. The wide and extended tread protects the sidewalls against cuts and snags. Special cut and chip resistant compounds and heat resistant compounds provide a long tire life.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
574425	14.9-24		8	TL	25	W13	49.7	15.2	147.1	22.3	5080	30	25

## GALAXY FRONT FARM F-2M

OEM FITMENT

The Galaxy Front Farm is a front tractor tire that provides excellent steering because of the higher center rib and has a long-lasting wear profile because of the special tread compound.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
562145	9.5L-15		8	TL	22	8LB	30.8	9.8	92	14.1	1870	36	25
562153	11L-15		8	TL	28	8LB	31.5	11	94	14.4	2090	44	25
562224	1000-16		8	TL	27	W8L	35.1	11.1	105	15.9	2340	44	25
562227	1100-16		8	TL	28	W10L	37.6	12.2	112	16.9	2600	40	25
562265	14L-16.1		12	TL	36	W11C	37.9	13.9	113	17.1	3860	52	25

## GALAXY EARTHPRO F-2

The Galaxy EarthPro F-2 has an optimized rib design to achieve easy driving in on and off-road applications. Tire life is enhanced by a special compound designed for low wear and additional rubber at the center rib. Specially designed rib angles and radius ensure better road stability. There is an additional rubber layer to provide under tread, improving penetration resistance.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
514182	500-15		4	TT	20	4.00E	26.2	5.5	77.9	12.1	805	41	19
514192	550-16		6	TT	19	4.00E	28	5.9	84.4	13	1168	54	19

CONTINUED ON NEXT PAGE

## GALAXY EARTHPRO F-2 (CONTINUED)

PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
514195	600-16		6	TT	20	4.50E	28.9	6.5	86.9	13.7	1235	48	19
514198	650-16		6	TT	23	4.00E	29.9	6.9	89.9	14.1	1356	45	19
514205	750-16		6	TT	26	5.50F	31.7	8.1	94.6	14.2	1653	41	19
514207	750-16		8	TT	26	5.50F	31.7	8.1	94.6	15	1929	54	19
514219	900-16		10	TT	30	W8	33.7	9.2	100.6	15.6	2756	57	19
514225	1000-16		8	TT	33	W8L	35.2	10.8	104.6	16.1	2679	41	19
514228	1100-16		8	TT	36	W8L	38	12.4	112.2	16.9	2910	36	19
514284	750-18		8	TT	26	5.50F	33.9	8.1	101	15.6	2150	54	19
514186	400-19		4	TT	15	3.00D	28.2	4.4	84	13	783	49	19
514037	600-19		6	TT	20	4.00E	32	6.5	96.9	15.4	1433	48	19
514303	750-20		8	TT	26	5.50F	35.6	8.1	107.7	16.7	2271	49	19

## GALAXY AG IMP I-1

OEM FITMENT

The Galaxy AG Imp provides excellent performance for both the drive wheels as well as free-rolling applications. The large shoulder blocks along with the center ribs provide excellent flotation and control in the field.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
571866	10.0/75-15.3		10	TL	15	8	29.9	10.4	88.3	13.5	3420	57	25
571874	10.0/75-15.3		14	TL	15	8	29.9	10.4	88.3	13.5	4180	80	25
571890	11.5/80-15.3		14	TL	15	10	33.3	11.4	96.7	14.6	5360	69	25
571288	12.5/80-18		12	TL	15	10	38	12.1	111.6	17	5840	54	25
571291	12.5/80-18		16	TL	15	10	38	12.1	111.6	17	6950	71	25

## GALAXY F-2

OEM FITMENT

The Galaxy F-2 is a multi-purpose front tractor tire that provides excellent flotation and steering. The F-2 also has a longer tire life due to its thick rubber at the center of the tread.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
542190	500-15		6	TT	20	3.00D	25.8	5.5	77.9	12.1	8806	60	25
542206	750-16		8	TL	25	5.50F	31.7	8.1	94.6	14.6	1710	56	25
542224	1000-16		8	TL	33	W8L	35.2	10.8	104.6	15.7	2340	44	25
542981	1000-16		10	TT	33	W8L	35.2	10.8	104.6	15.7	2680	56	25
542015	1100-16		10	TT	36	W10L	38	12.4	112.2	17.2	3080	52	25

## GALAXY IMPMASTER 350 FI I-1

OEM FITMENT

The Galaxy ImpMaster 350 FI provides excellent performance for free-rolling wheels for use on harvesting machines, hay balers, bale racks, seeders, wind-rowers and fertilizer and manure spreaders. This tire is DOT certified for intermittent highway use.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	TREAD DEPTH	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
551145	9.5L-15		8	TL	11	8LB	30.2	9.7	90	13.8	2680	60	62
551156	11L-15		12	TL	10	8LB/10LB	30.9	10.4	91	13.9	3960	90	62
551166	12.5L-15		12	TL	11	10LB	32.3	12.5	94	14.4	4680	90	62

## GALAXY IMPMASTER 200 I-1

The Galaxy ImpMaster 200 provides excellent performance for free-rolling wheels used on harvesting machines, hay balers, bale racks, seeders, windrowers and fertilizer and manure spreaders.

OEM FITMENT



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
545130	760-15		8	TL	8	7J	28.4	7.9	81.5	12.6	2090	52	30
545146	9.5L-15		8	TT	10	8LB	30	9.6	86.1	13.3	2470	44	30
495244	16.5L-16.1		10	TL	15	W14C	40.3	16.5	121.9	18	6390	59	62
545244	16.5-16.1 SL		10	TL	14	W14C	40.8	16.5	116.5	18.1	5192	36	25
545292	16.5-16.1 SL		14	TL	14	W14C	40.8	16.5	116.5	18.1	6400	48	20

## GALAXY RIB IMPLEMENT I-1

The Galaxy Rib Implement provides excellent performance for free-rolling wheels on wagons, hay balers, bale racks, seeders, windrowers, and fertilizer spreaders.

OEM FITMENT



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
544105	9.5L-14		8	TL	9	8LB	29.4	9.5	88	13.5	2400	44	30
544109	11L-14		8	TL	9	10LB	29.7	11	88	13.5	2470	36	30
544184	6.70-15		6	TL	7	4J	28.4	6.7	84	12.9	1610	44	30
544130	7.60-15		8	TL	8	7J	29	8.2	86	13.1	2090	52	30
544145	9.5L-15		8	TL	10	8LB	30.2	9.8	89	13.9	2470	44	30
544147	9.5L-15		12	TL	10	8LB	30.2	9.8	89	13.9	3200	64	30
544153	11L-15		8	TL	10	8LB	30.6	10.5	90	13.7	2540	36	30
544156	11L-15		12	TL	10	8LB/10LB	30.6	10.5	90	13.7	3200	52	30
544722	12.5L-15		8	TL	11	10LB	32.9	12.6	96	14.6	3000	36	30
544165	12.5L-15		10	TL	11	10LB	32.9	12.6	96	14.6	3420	44	30
544166	12.5L-15		12	TL	11	10LB	32.9	12.6	96	14.6	3860	52	30
544167	12.5L-15		14	TL	11	10LB	32.9	12.6	96	14.6	3960	62	30
544170	31X1350-15		8	TL	12	10LB	30.8	13.8	95.1	14.7	2596	45	31
544268	14L-16.1		14	TL	13	W11C	14.2	37	107	16.4	5203	51	30
544954	19L-16.1		12	TL	16	W16	41.7	18.9	119	18.2	6600	36	30
544730	21.5L-16.1		10	TL	15	W18	44.8	21.5	127	19.3	6600	28	30
544740	21.5L-16.1		14	TL	15	W18	44.8	21.5	127	19.3	7850	36	30
544742	21.5L-16.1		18	TL	15	W8	44.8	21.5	126.1	19.4	9921	44	25

## GALAXY RIB IMPLEMENT "STUBBLE GUARD" I-1

OEM FITMENT

This Galaxy Rib Imp is produced using a severe-duty compound and our unique reinforced under-tread to provide it with penetration protection. The high flotation and stubble guard make it the perfect tire for any wagon, baler, or harvesting machine.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
563184	670-15		6	TL	7	4J	28.42	6.69	84.01	12.67	1610	44	30
563130	760-15		8	TL	8	7J	29	8.2	86	13.1	2090	52	30
563145	9.5L-15		8	TL	10	8LB	30.2	9.8	89	13.9	2470	44	30
563153	11L-15		8	TL	10	8LB/10LB	30.6	10.5	90	13.7	2540	36	30
563166	12.5L-15		12	TL	11	10LB	32.9	12.6	96.1	14.6	3420	44	30

## **GALAXY IMPMASTER 350 I-1**

**OEM FITMENT**

The Galaxy ImpMaster 350 provides excellent performance for free-rolling wheels for use on harvesting machines, hay balers, bale racks, seeders, windrowers, and fertilizer and manure spreaders.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
546170	31X1350-15		8	TL	13	10LB	31.7	13.4	88.6	13.8	2600	45	30
546265	14L-16.1		12	TL	13	W11C	36.9	14	103.7	16.1	4680	44	30

## **GALAXY IMPMASTER 350 I-2**

**OEM FITMENT**

The Galaxy ImpMaster 350 I-2 is made with a wide tread profile to enhance flotation and reduce soil compaction. It is made with a tread depth that is 33% deeper than the competition resulting in a much longer tread life and reducing field hazard damages.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
555365	11-22.5		12	TL	17	8.25	41.1	10.9	125	19	6000	60	20
555366	11-22.5		14	TL	21	8.25	41.1	10.9	125	19	7000	90	20

## **GALAXY STUBBLE PROOF HIGHWAY**

**OEM FITMENT**

The Galaxy Stubble Proof Highway has designed a tire for heavy wagons that need stubble protection in the fields. The Galaxy Stubble Proof Highway has our unique reinforced under-tread and special tread compound to give it great penetration protection.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
550052	20.5x8.0-10SL		8	TL	14	7	20.6	8	62.1	9.4	1323	70	50
550269	12.5L-16.5		14	TL	16	9.75	33.2	12.2	90.4	13.7	4800	90	45
549851	32X1550-16.5		14	TL	16	12	32.9	16	89.7	13.6	5840	90	45

## **GALAXY AGRI-AIR SEEDER R-3**

**OEM FITMENT**

The Galaxy Agri-Air Seeder is stubble proof due to its unique design and severe-duty compound. It also has Galaxy's unique reinforced under-tread which gives it additional penetration protection.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
142271	33X1550-16.5		10	TL	17	12	32.8	15.2	99	15	4940	60	30

## **GALAXY STUBBLE PROOF IMP R-3**

**OEM FITMENT**

The Galaxy Stubble Proof IMP is stubble proof due to its unique design and severe-duty compound. The IMP R-3 also has Galaxy's unique reinforced under-tread which gives it additional penetration protection.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
548171	31X1350-15		12	TL	14	10LB	30.6	13.9	92	13.9	3520	75	30





# **COMMERCIAL-SPECIALTY**

## **BUILT TO KEEP YOU ROLLING ON ANY SURFACE IN ANY WEATHER**

When your life is on the road, you depend on your tires to go the distance. Galaxy and Primex commercial tires provide long-lasting, dependable performance on any surface, in any kind of weather. Long carcass life and a wide selection of patterns and sizes keep our commercial tires rolling coast to coast.





**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

## GALAXY SPECIAL TRAILER

OEM FITMENT

The Galaxy Special Trailer uses the best rubber compound and a deep tread to provide long wear. The tire has proven its superiority on the road and is now supported by many original equipment manufacturers.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
400049	650-10		10	TL	8	5.5	23.3	7.1	70.6	10.7	1610	100	65
400054	20.5X8-10		10	TL	9	6JA	20.6	8	62	9.4	1520	90	62
400114	8-14.5		14	TL	11	6	28.7	8.5	83	12.9	3085	115	65
400116	9-14.5		14	TL	14	6	28.6	9.8	88	13.3	3825	115	50
400239	235/85D16		12	TL	14	6.5	31.7	9.3	97	14.7	3420	90	65
400255	875-16.5		12	TL	14	6.75	29.5	8.8	91	13.8	3000	90	65
400257	950-16.5		12	TL	14	6.75	30.6	9.5	93.7	14.2	3520	90	65
400266	12-16.5		12	TL	16	9.75	32.2	12.1	97.6	14.8	4080	75	65

## GALAXY SPECIAL TRAILER II

OEM FITMENT

The Galaxy Special Trailer II is designed with special rubber compounds and a deep tread design to provide longer wear.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
404058	9.00-10		10	TL	11	7	25.6	9	74	11.5	2090	75	65
404085	26x12.00-12		14	TL	12	10.5	26.3	12	76	11.7	2910	80	62

## PRIMEX HWY R288

OEM FITMENT

The Primex HWY R288 features a heavy-duty casing and a wide footprint for excellent stability. The tire also has a deep tread for long tire life."



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
417276	14-17.5		10	TL	18	10.5	35.8	13.9	106.9	16.2	4800	70	65

## PRIMEX TRAILER SERVICE

The Primex Trailer Service is designed with special rubber compounds and a deep tread design to provide longer wear.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
422747	205/90-15		10	TL	13	5.5F	29.6	8	89	13.3	2910	105	62
422960	225/90-16		10	TL	13	6	31.8	8.2	94	14.7	3527	105	62

## PRIMEX R550

The Primex R550 is engineered with a deep tread for long wear and features a heavy-duty carcass for superior retreadability. The R550 is an excellent steer and trailer application tire which is ideal for highway applications.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
407366	11-22.5		14	TL	19	8.25	41.7	11.4	125	19.5	6150	100	65



## PRIMEX TRACTION LUG

The Traction Lug is the perfect choice for drive wheels. The traction lug was designed to provide exceptional traction and self-cleaning.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
413313	900-20		14	TT	26	7	40.1	10.2	123.4	18.7	5680	115	55

## PRIMEX STS INTERMODAL

This Primex STS Intermodal was engineered with an enhanced compound to provide superior tread wear and retreadability. As its name suggests, the STS Intermodal is ideally suited for container chassis.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
425321	1000-20		14	TT	14	7.5	41.6	11.2	126.5	19.4	6150	100	65

### NOTES:

---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---

# **TERRA**

## **MAXIMUM PERFORMANCE**

## **MINIMUM SOIL COMPACTION**

Soil compaction can devastate productivity of fields, forests and wetlands for generations—which is why flotation tires are so vital to long-term success. ATG's engineers are world-renowned experts in minimizing soil compaction and maximizing performance with flotation tires. The result: a broad line of high-performance flotation tires with great traction and a light touch.







**GALAXY**  
APPLICATION SPECIFIC, PURPOSE BUILT.

## PRIMEX TERRA TURBO II

OEM FITMENT

The Primex Terra Turbo II is designed for limited soil compaction and maximum flotation.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
509357	42X2500-20		16	TL	54	20.5HF/20.5VF	42.9	24.8	128.2	19.2	5840	60	30
509356	48X2500-20		12	TL	55	20.5HF/20.5VF	48.5	24.6	139.0	21.3	7150	45	30
509361	48X2500-20		16	TL	55	20.5HF	49.9	25	139.0	21.9	8047	55	30
509358	48X3100-20		12	TL	55	26.0HF/26.0VF	50	28.9	149.0	22.9	6950	40	30
509359	48X3100-20		16	TL	56	26.0HF	49.9	30.5	139.8	22.8	7826	50	30
509500	66X4300-25		16	TL	73	36.0TH	66.5	40.6	188.0	28.8	13200	40	30
509501	66X4300-25		20	TL	73	36.0TH	66.5	40.6	188.0	28.8	14800	50	30
509523	66X43.00-25		26	TL	71	36.0TH	66.5	40.6	200.5	28.7	17620	65	30
509592	73X4400-32		16	TL	96	36.0VA	75.3	44	223.7	32.7	15200	40	30

## PRIMEX TERRA BLASTER HF-2

The Primex Terra Blaster has a multi-angle lug at the shoulder with a denser pattern at the center of the tire for excellent steering and superior flotation in the field and a smooth ride over the road.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
500358	48X3100-20		12	TL	36	26.0HF/26.0VF	49	30.5	145.2	21.8	6950	40	30

## PRIMEX IMP TRACK METRIC I-3

OEM FITMENT

The Primex IMP Trak Metric is the metric version of the Primex Terra Glide, and is designed for free-rolling wheels where flotation and limited soil compaction is desired.



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
504386	600/50-22.5		16	TL	25	AG20	46.5	24	137.9	20.7	11400	38	25
504388	700/40-22.5		16	TL	25	AG24	46.5	27.9	137.9	20.7	11700	32	25
504390	700/50-22.5		16	TL	25	AG24	50	27.6	147.9	22.2	14800	35	25

## PRIMEX GEOMASTER HF-1

The Primex GeoMaster is specifically designed for the exploration and geophysics industries. The large footprint gives this tire superior flotation and minimizes ground disturbance and soil compaction



PRODUCT CODE	SIZE	ALT. SIZE	PR/LI	TYPE	NSD (32NDS)	PREFERRED RIM	OD	WIDTH	RC	SLR	MAX LOAD (LBS)	PSI	MAX SPEED
510502	66X4400-25		6	TL	14	25	67.8	43.3	190.7	29.6	7600	15	30
510504	66X4400-25		20	TL	14	36	67.8	43.3	191.1	29.1	15700	51	30
510505	66X4400-25		26	TL	14	36	67.7	43.3	205.4	31.5	17100	65	30





# TIRE SIZE INDEX

Wheel Diameter	Standard Size	SOLID			Radial					Bias						
<b>6½</b>	10x5_61/2	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45												
<b>8</b>	5.00_8	YARDMASTER SDS PG.43	LIFTER SDS PG.44								YARDMASTER ULTRA IND PG.41					
	12x41/2_8	YM SDS SMOOTH PG.45														
	14x41/2_8	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45												
	15x41/2_8	YARDMASTER SDS PG.43	LIFTOP SDS PG.43	LIFTER SDS PG.44												
	16x6_8	YARDMASTER SDS PG.43	LIFTOP SDS PG.43	LIFTER SDS PG.44												
	16x6.50_8										MIGHTY MOW TS PG.51					
	16x7.50_8										MIGHTY MOW TS PG.51					
	18x7_8	YARDMASTER SDS PG.43	LIFTOP SDS PG.43	LIFTER SDS PG.44							YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42				
	18x8.50_8										MIGHTY MOW TS PG.51					
	18x9.50_8										MIGHTY MOW TS PG.51					
	20x10_8										MIGHTY MOW TS PG.51					
	125/75_8	YARDMASTER SDS PG.43														
	150/75_8	YARDMASTER SDS PG.43														
	180/70_8	YARDMASTER SDS PG.43														
	400_8	LIFTOP SDS LUG PG.44	LIFTOP SDS RIB PG.44													
500_8	LIFTOP SDS PG.43									YARDMASTER IND PG.42						
<b>9</b>	6.00_9	YARDMASTER SDS PG.43	LIFTER SDS PG.44								YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42				
	21x8_9	YARDMASTER SDS PG.43	LIFTOP SDS PG.43								YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42				
	140/55_9	LIFTOP SDS PG.43	YARDMASTER SDS PG.43	LIFTER SDS PG.44												
	200/75_9	YARDMASTER SDS PG.43														
	600_9	LIFTOP SDS PG.43														
<b>10</b>	6.50_10	YARDMASTER SDS PG.43	LIFTER SDS PG.44													
	9.00_10										SPECIAL TRAILER II PG.72					
	14x5_10	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45												
	18x8.50_10				GARDEN PRO XTD PG.50						MIGHTY MOW TS PG.51					
	18x10.50_10										MIGHTY MOW TS PG.51					

Wheel Diameter	Standard Size	SOLID			Radial					Bias					
10	20x10_10										MIGHTY MOW TS PG.51				
	20.5x8.0_10S										STUBBLE PROOF HIGHWAY PG.68				
	20.5x8_10										SPECIAL TRAILER PG.72				
	23x9_10	LIFTOP SDS PG.43	YARDMASTER SDS PG.43	LIFTER SDS PG.44											
	200/50_10	LIFTOP SDS PG.43	YARDMASTER SDS PG.43	LIFTER SDS PG.44											
	215/45_10				GARDEN PRO XTD PG.50										
	650_10	LIFTOP SDS PG.43									SPECIAL TRAILER PG.72	YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42		

10½	16x5_101/2	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											
	16x6_101/2	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											
	16x7_101/2	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											

11¼	15x5_111/4	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											
	161/4x5_111/4	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											
	161/4x6_111/4	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											
	161/4x7_111/4	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											

12	7.00_12	YARDMASTER SDS PG.43	LIFTER SDS PG.44												
	23x8.50_12										MIGHTY MOW PG.50	MIGHTY MOW TS PG.51			
	23x10_12	LIFTOP SDS PG.43	YARDMASTER SDS PG.43												
	23x10.50_12										MIGHTY MOW TS PG.51				
	23x850_12										XD2010 PG.14				
	23X950_12				GARDEN PRO PG.50										
	24x12_12										MIGHTY MOW TS PG.51				
	24x13_12										TURF SPECIAL PG.52				
	26x12_12				GARDEN PRO XTD PG.50						SPECIAL TRAILER II PG.72	SUPER TRENCHER PG.23	MIGHTY MOW TS PG.51		
	27x10_12	LIFTOP SDS PG.43	YARDMASTER SDS PG.43												
	220/55_12				GARDEN PRO PG.50										
	240/60_12				GARDEN PRO PG.50										
	315/55_12				GARDEN PRO XTD PG.50										
	570_12											XD2010 PG.14			
	700_12	LIFTOP SDS PG.43										YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42		

Wheel Diameter	Standard Size	SOLID			Radial					Bias					
12½	18x6_121/8	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											
	18x7_121/8	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											
	18x8_121/8	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45											

14	9.5_14											RIB IMPLEMENT PG.67				
	11_14											RIB IMPLEMENT PG.67				
	23x8.50_14											MIGHTY MOW PG.50				
	23x850_14					GARDEN PRO PG.50						MARATHONER PG.23				
	25x850_14					GARDEN PRO XTD PG.50						SUPER IND LUG PG.22	MARATHONER PG.23			
	180/95_14											AGRI TRAC II PG.63				
	215/65_14					GARDEN PRO XTD PG.50										
	220/55_14					GARDEN PRO PG.50										

14.5	8_14.5											SPECIAL TRAILER PG.72				
	9_14.5											SPECIAL TRAILER PG.72				

15	6.70_15											RIB IMPLEMENT PG.67					
	7.00_15	YARDMASTER SDS PG.43	LIFTER SDS PG.44														
	7.50_15	YARDMASTER SDS PG.43										SMOOTH COMPACTOR PG.32					
	7.60_15											RIB IMPLEMENT PG.67					
	8.15_15	YARDMASTER SDS PG.43										YARDMASTER ULTRA IND PG.41					
	8.25_15	YARDMASTER SDS PG.43	LIFTER SDS PG.44									YARDMASTER IND PG.42					
	9.5_15											FRONT FARM PG.65	IMPMASTER 350 I-1 PG.68	IMPMASTER 200 PG.67	RIB IMPLEMENT PG.67	RIB IMPLEMENT STUBBLE GUARD PG.67	
	11_15											WORKSTAR PG.24	FRONT FARM PG.65	IMPMASTER 350 I-1 PG.68	RIB IMPLEMENT PG.67	RIB IMPLEMENT STUBBLE GUARD PG.67	
	12.5_15											IMPMASTER 350 I-1 PG.68	RIB IMPLEMENT PG.67	RIB IMPLEMENT STUBBLE GUARD PG.67			
	21x7_15	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45													
	21x8_15	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45													
	21x9_15	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45													
	25x10.50_15												TURF SPECIAL PG.52				
	27x8.50_15						GARDEN PRO XTD PG.50						MIGHTY MOW PG.50				
	27x10.50_15												MIGHTY MOW PG.50	TURF SPECIAL PG.52			
	27x12_15												TURF SPECIAL PG.52				



Wheel Diameter	Standard Size	SOLID			Radial					Bias							
<b>15</b>	27x14_15										TURF SPECIAL PG.52						
	27x850_15										XD2010 PG.14	MARATHONER PG.23					
	27x1050_15										XD2010 PG.14						
	28x9_15	YARDMASTER SDS PG.43	LIFTER SDS PG.44								YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42					
	29x12.50_15										MIGHTY MOW PG.50						
	29x1250_15										SUPER TRENCHER PG.23						
	31x15.50_15										HIPPO PG.31						
	31x1350_15										RIB IMPLEMENT PG.67	IMPMASTER 350 L-1 PG.68	STUBBLE PROOF IMP PG.68				
	31x1550_15										SUPER TRENCHER PG.23						
	35x15_15										KING OF COAL PG.33						
	200/60_15					GARDEN PRO PG.50											
	205/90_15										TRAILER SERVICE PG.72						
	215/70_15					GARDEN PRO XTD PG.50											
	250_15	LIFTOP SDS PG.43	YARDMASTER SDS PG.43	LIFTER SDS PG.44							YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42					
	300_15	LIFTOP SDS PG.43	YARDMASTER SDS PG.43	LIFTER SDS PG.44							YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42					
	315/70_15	YARDMASTER SDS PG.43															
	500_15										EARTHPRO PG.65	F-2 PG.66					
	670_15										RIB IMPLEMENT STUBBLE GUARD PG.67						
	700_15	LIFTOP SDS PG.43									YARDMASTER IND PG.42	YARDMASTER ULTRA IND PG.41					
	750_15										YARDMASTER ULTRA IND PG.41	YARDMASTER IND PG.42					
760_15										IMPMASTER 200 PG.67	RIB IMPLEMENT STUBBLE GUARD PG.67						
815_15	LIFTOP SDS PG.43																
825_15	LIFTOP SDS PG.43									KING OF COAL PG.33	YARDMASTER ULTRA IND PG.41						

<b>15.3</b>	10.0/75_15.3										AG IMP PG.66					
	11.5/80_15.3										AG IMP PG.66					

<b>16</b>	7.0_16										AGRI TRAC II PG.63					
	8.0_16										AGRI TRAC II PG.63					
	9.5_16									MIGHTY MOW PG.50	AGRI TRAC II PG.63					
	11_16S									IND RIB ULTRA PG.24						

Wheel Diameter	Standard Size	SOLID			Radial					Bias				
16	11_16									IND RIB ULTRA PG.24	WORKSTAR PG.24			
	12_16									TURF SPECIAL PG.52				
	12.4_16									MIGHTY MOW PG.50				
	22x8_16	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45										
	22x9_16	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45										
	22x12_16	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45										
	22x14_16	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45										
	30x10_16	HULK SDS PG.15												
	33x12_16	HULK SDS PG.15												
	35x15_16									KING OF COAL PG.33				
	200/65_16				GARDEN PRO PG.50									
	200/70_16				GARDEN PRO PG.50									
	225/90_16									TRAILER SERVICE PG.72				
	235/85_16									SPECIAL TRAILER PG.72				
	240/70_16				GARDEN PRO PG.50									
	260/70_16				GARDEN PRO PG.50									
	280/70_16				GARDEN PRO PG.50									
	550_16									EARTHPRO PG.65				
	600_16									EARTHPRO PG.65				
	650_16									EARTHPRO PG.65				
	750_16									EARTHPRO PG.65	F-2 PG.66			
900_16									EARTHPRO PG.65					
1000_16									FRONT FARM PG.65	EARTHPRO PG.65	F-2 PG.66			
1100_16									FRONT FARM PG.65	EARTHPRO PG.65	F-2 PG.66			

16.1	14_16.1									FRONT FARM PG.65	RIB IMPLEMENT PG.67	IMPMASTER 350 I-1 PG.68		
	14.5/75_16.1									IND RIB PG.24	SUPER IND RIB PG.24			
	16.5_16.1S									IMPMASTER 200 PG.67				
	16.5_16.1									IMPMASTER 200 PG.67				
	19_16.1									RIB IMPLEMENT PG.67				
	21.5_16.1S									MIGHTY MOW PG.50				

Wheel Diameter	Standard Size	SOLID			Radial						Bias								
<b>16.1</b>	21.5_16.1										RIB IMPLEMENT PG.67								
	22.5_16.1										RIB IMPLEMENT PG.67	SUPER SOFT PG.64	TURF SPECIAL PG.52						
	33x16_16.1										TURF SPECIAL PG.52								
	33x18_16.1										TURF SPECIAL PG.52								
	41x18_16.1										TURF SPECIAL PG.52								

<b>16.5</b>	10_16.5	HULK SDS PG.15	BEEFY BABY SDS PG.15	SUPER SMOOTH SDS PG.35	GARDEN PRO XTD PG.50						MIGHTY TRAC ND PG.12	BOSSMAN GRIPSTEEL II PG.12	HULK PG.12	KING KONG PG.12	MUDDY BUDDY PG.12	TRAC STAR ND PG.13		
											BEEFY BABY III PG.13	BEEFY BABY PG.13	XD2010 PG.14	SKIDDO PG.14	CST-903 PG.15	MARATHONER PG.23		
											MIGHTY MOW PG.50							
	12_16.5	HULK SDS PG.15	BEEFY BABY SDS PG.15	SUPER SMOOTH SDS PG.35	GARDEN PRO XTD PG.50						MIGHTY TRAC ND PG.12	BOSSMAN GRIPSTEEL II PG.12	HULK PG.12	KING KONG PG.12	MUDDY BUDDY PG.12	TRAC STAR ND PG.13		
											BEEFY BABY III PG.13	BEEFY BABY PG.13	XD2010 PG.14	SKIDDO PG.14	CST-903 PG.15	MARATHONER PG.23		
	12.5_16.5										MIGHTY MOW PG.50	SPECIAL TRAILER PG.72						
	31.5x13.00_16.5										STUBBLE PROOF HIGHWAY PG.68							
	32x1550_16.5										HIPPO PG.31							
	33x15.50_16.5										STUBBLE PROOF HIGHWAY PG.68							
	33x1550_16.5										HULK PG.12	BEEFY BABY III PG.13	HIPPO PG.31	AGRI-AIR SEEDER PG.68				
	265/70_16.5					GARDEN PRO XTD PG.50					XD2010 PG.14							
305/70_16.5					GARDEN PRO XTD PG.50													
875_16.5										SPECIAL TRAILER PG.72								
950_16.5										SPECIAL TRAILER PG.72								

<b>17.5</b>	14_17.5	BEEFY BABY SDS PG.15			GARDEN PRO XTD PG.50						MIGHTY MOW PG.50	MIGHTY TRAC ND PG.12	HULK PG.12	MUDDY BUDDY PG.12	BEEFY BABY III PG.13	BEEFY BABY PG.13
	355/65_17.5				GARDEN PRO XTD PG.50						XD2010 PG.14	MARATHONER PG.23	HWY R288 PG.72			

<b>18</b>	10.5/80_18										BEEFY BABY PG.13						
	12.5/80_18				MULTI USE 550 PG.21	IND RADIAL PG.21	MULTI- TOUGH PG.21					SUPER IND LUG PG.22	BEEFY BABY PG.13	JUMBO HULK PG.21	MARATHONER PG.23	SUPER HIGH LIFT PG.23	CST-201 PG.24
												AG IMP PG.66					
	260/70_18				GARDEN PRO PG.50												
	280/70_18				GARDEN PRO PG.50												
320/65_18				GARDEN PRO PG.50													

Wheel Diameter	Standard Size	SOLID			Radial					Bias						
18	320/80_18										SUPER IND LUG PG.22					
	340/80_18				MULTI USE 550 PG.21	IND RADIAL PG.21	MULTI-TOUGH PG.21									
	405/70_18				MULTI-TOUGH PG.21											
	750_18										EARTHPRO PG.65					
19	400_19										EARTHPRO PG.65					
	600_19										EARTHPRO PG.65					
19.5	15_19.5				GARDEN PRO XTD PG.50						BEEFY BABY III PG.13	BEEFY BABY PG.13	XD2010 PG.14	SUPER IND LUG PG.22	MARATHONER PG.23	
	385/65_19.5				GARDEN PRO XTD PG.50											
20	8.25_20										DIG MASTER PG.31					
	9.00_20	LIFTOP SDS LUG PG.44									DIG MASTER PG.31	YARDMASTER ULTRA IND PG.41				
	9.5_20										EARTHPRO PG.65					
	10.00_20	YARDMASTER SDS PG.43	LIFTER SDS PG.44		YARDMASTER IND RADIAL PG.42											
	11.00_20										DIG MASTER PG.31					
	12.00_20	YARDMASTER SDS PG.43			YARDMASTER IND RADIAL PG.42											
	12.4_20										MARATHONER PG.23					
	14/70_20										SMOOTH COMPACTOR PG.32					
	16/70_20										SUPER IND LUG PG.22					
	31x10_20	BEEFY BABY SDS PG.15	SUPER SMOOTH SDS PG.35													
	33x12_20	BEEFY BABY SDS PG.15	SUPER SMOOTH SDS PG.35													
	36x14_20	BEEFY BABY SDS PG.15														
	38x18_20										SUPER TRENCHER PG.23					
	41x14.00_20										MIGHTY MOW PG.50					
	42x2500_20										TERRA TURBO II PG.76					
	43x1600_20				GARDEN PRO XTD PG.50						MARATHONER PG.23					
	44x18.00_20										MIGHTY MOW PG.50					
	48x2500_20										TERRA TURBO II PG.76					
	48x3100_20										TERRA TURBO II PG.76	TERRA BLASTER PG.76				
	280/70_20				EARTHPRO RADIAL PG.60											
280/85_20				EARTHPRO RADIAL PG.60												



Wheel Diameter	Standard Size	SOLID			Radial						Bias						
20	300/70_20				GARDEN PRO PG.50	EARTHPRO RADIAL PG.60											
	315/55D20										BEEFY BABY III PG.13						
	320/70_20				GARDEN PRO PG.50	EARTHPRO RADIAL PG.60											
	320/85_20				EARTHPRO RADIAL PG.60												
	380/70_20				GARDEN PRO PG.50												
	400/70_20				GARDEN PRO XTD PG.50						SUPER IND LUG PG.22						
	405/70_20				MULTI- TOUGH PG.21												
	750_20										EARTHPRO PG.65						
	900_20										SMOOTH ROLLER PG.32	ROCK MINE LUG PG.33	TRACTION LUG PG.73	BOSSLIFT III PG.41			
	1000_20											DIG MASTER PG.31	ROCK MINE LUG PG.33	ROCK MINE LUG PLUS PG.33	STS INTERMODAL PG.73	EXCAVATOR PG.31	YARDMASTER ULTRA IND PG.41
												BOSSLIFT III PG.41					
	1100_20										EXCAVATOR PG.31	SMOOTH COMPACTOR PG.32	ROCK MINE LUG PLUS PG.33				
	1200_20										SUPER SEVERE MINE PG.34	HARBOUR- MASTER IS PG.41	BOSSLIFT III PG.41	YARDMASTER ULTRA IND PG.41			
1400_20										SUPER PAVER PG.32							
22	9.5_22										347 BIAS PG.63						
	28x10_22	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45													
	28x12_22	YM SDS TR PG.46	YM SDS LUG PG.46	YM SDS SMOOTH PG.45													
	125/90_22				GARDEN PRO PG.50												
22.5	11_22.5										IMPMASTER 350 I-2 PG.68	R550 PG.72	BEEFY BABY PG.13				
	15_22.5										BEEFY BABY PG.13						
	18_22.5										BEEFY BABY PG.13						
	41x18_22.5										TURF SPECIAL PG.52						
	280/75_22.5				TERMINAL MASTER PG.40												
	310/80_22.5				TERMINAL MASTER PG.40												
	600/50_22.5										IMP TRACK METRIC PG.76						
	700/40_22.5										IMP TRACK METRIC PG.76						
700/50_22.5										IMP TRACK METRIC PG.76							
24	8.3_24										EARTHPRO 45 PG.62						
	9.5_24										EARTHPRO 45 PG.62	AGRI TRAC II PG.63					



Wheel Diameter	Standard Size	SOLID			Radial					Bias					
24	1400_24	SUPER HIGH LIFT SDS PG.30								GIRAFFE XLW PG.29	S300 PG.29	G3000 PG.29	MPC PG.30	EXR300 ROCK LUG PG.31	SUP SEVERE DBL W/LUG PG.33
										SUPER TRAC PG.39	HM300 PG.39				
	1600_24									SLG II PG.30					

25	14.00_25	LHD 500 SDS PG.34								EXR300 ROCK LUG PG.31						
	15.5_25									GIRAFFE XLW PG.29	MPC PG.30	EXR300 ROCK LUG PG.31				
	16.00_25	SUPER SMOOTH SDS PG.35								HM400S PG.40	PORT MAX PG.40					
	17.5_25	LHD 500 SDS PG.34			MGSR PG.35	LDSR PG.35	TUL300 PG.50				GIRAFFE XLW PG.29	S300 PG.29	MPC PG.30	CST-318 PG.30	EXR300 ROCK LUG PG.31	SUPER SEVERE MINE PG.34
											LHD 500 PG.34					
	18.00_25									HM500S PG.40	PORT MAX PG.40					
	20.5_25	SUPER SMOOTH SDS PG.35			MGSR PG.35	LDSR PG.35	TUL300 PG.50	TUL500 PG.51			GIRAFFE XLW PG.29	MPC PG.30	CST-318 PG.30	EXR300 ROCK LUG PG.31	HIPPO PG.31	SUPER SEVERE MINE PG.34
											LHD 500 PG.34					
	23.5_25	SUPER SMOOTH SDS PG.35			LDSR PG.35	HTSR PG.35	TUL300 PG.50	TUL400 PG.50	TUL500 PG.51		MPC PG.30	CST-318 PG.30	EXR300 ROCK LUG PG.31	HIPPO PG.31	SUPER SEVERE MINE PG.34	LHD 500 PG.34
	26.5_25	SUPER SMOOTH SDS PG.35			LDSR PG.35	HTSR PG.35	TUL300 PG.50	TUL400 PG.50	TUL500 PG.51		CST-318 PG.30	EXR300 ROCK LUG PG.31	HIPPO PG.31	SUPER SEVERE MINE PG.34	LHD 500 PG.34	
	29.5_25	SUPER SMOOTH SDS PG.35			LDSR PG.35	HTSR PG.35	TUL300 PG.50	TUL400 PG.50			EXR300 ROCK LUG PG.31	SUPER SEVERE MINE PG.34	LHD 500A PG.34			
	66x43.00_25										TERRA TURBO II PG.76					
	66x4300_25										LOGSTOMPER EXTREME PG.56	TERRA TURBO II PG.76				
	66x4400_25										GEOMASTER PG.76					
	67x3400_25										LOGSTOMPER EXTREME PG.56					
1400_25										EXR300 ROCK LUG PG.31						
1600_25										SUPER TRAC PG.39						
1800_25				HARBOR KING PG.41						SAND RIB PG.32	ROCK MAX PG.33	SUPER SEVERE MINE PG.34	SUPER GRIP PG.39	PORT STAR PG.39	HM400S PG.40	
2100_25										SUPER PAVER PG.32	SUPER TRAC PG.39					

26	18.4_26				MULTI-TOUGH PG.21					SUPER IND LUG PG.22	347 BIAS PG.63	JUMBO HULK PG.21	LOGMONSTER PG.56		
	23.1_26									347 BIAS PG.63	LOGSTOMPER EXTREME PG.56	LOGMONSTER PG.56	COMPACTOR PG.65		
	28_26									LOGSTOMPER EXTREME PG.56	LOGMONSTER PG.56	DIAMOND TREAD PG.69			
	66x43.00_26									LOGSTOMPER EXTREME PG.56					
	67x34.00_26									LOGSTOMPER EXTREME PG.56					
	480/80_26				MULTI-TOUGH PG.21					SUPER IND LUG PG.22	347 BIAS PG.63				
	600/75_26									347 BIAS PG.63					

Wheel Diameter	Standard Size	SOLID			Radial					Bias						
26	725x65_26										HONEY WAGON PG.65					
	750/60_26				RADIAL SUPER SOFTTEE PG.64											

28	11.2_28										EARTHPRO 45 PG.62						
	12.4_28				GARDEN PRO PG.50						EARTHPRO 45 PG.62						
	13.6_28				GARDEN PRO PG.50						EARTHPRO 45 PG.62	AGRI TRAC II PG.63					
	14.9_28										EARTHPRO BIAS PG.62	EARTHPRO 45 PG.62	AGRI TRAC II PG.63				
	16.9_28				MULTI- TOUGH PG.21	GARDEN PRO PG.50						SUPER IND LUG PG.22	JUMBO HULK PG.21	EZ RIDER PG.22	GIRAFFE XLW PG.29	EARTHPRO BIAS PG.62	EARTHPRO 45 PG.62
												AGRI TRAC II PG.63					
	21_28											EZ RIDER PG.22					
	320/70_28						EARTHPRO RADIAL PG.60										
	320/85_28					GARDEN PRO PG.50	EARTHPRO RADIAL PG.60										
	340/85_28					GARDEN PRO PG.50	EARTHPRO RADIAL PG.60										
	360/70_28					GARDEN PRO PG.50	EARTHPRO RADIAL PG.60										
	370/75_28											GIRAFFE XLW PG.29					
	380/70_28					EARTHPRO RADIAL PG.60											
	380/85_28					EARTHPRO RADIAL PG.60											
	400/75_28											GIRAFFE ND PG.29					
	420/70_28					EARTHPRO RADIAL PG.60											
	420/85_28					EARTHPRO RADIAL PG.60											
	440/80_28					MULTI- TOUGH PG.21						SUPER IND LUG PG.22					
	480/65_28					EARTHPRO RADIAL PG.60											
	480/70_28					GARDEN PRO PG.50	EARTHPRO RADIAL PG.60										
540/65_28					EARTHPRO RADIAL PG.60												
600/65_28					EARTHPRO RADIAL PG.60												

30	16.9_30				GARDEN PRO PG.50						347 BIAS PG.63	JUMBO HULK PG.21	SUPER IND LUG PG.22	LOGMONSTER PG.56	EARTHPRO BIAS PG.62	EARTHPRO 45 PG.62
	18.4_30										AGRI TRAC II PG.63					
	23.1_30										LOGMONSTER PG.56	EARTHPRO BIAS PG.62	EARTHPRO 45 PG.62	AGRI TRAC II PG.63		
	380/85_30					EARTHPRO RADIAL PG.60					EARTHPRO BIAS PG.62					



Wheel Diameter	Standard Size	SOLID			Radial						Bias			
<b>30</b>	420/70_30				EARTHPRO RADIAL PG.60									
	420/85_30				EARTHPRO RADIAL PG.60						347 BIAS PG.63			
	420/90_30				EARTHPRO RADIAL PG.60									
	460/85_30				EARTHPRO RADIAL PG.60									
	480/70_30				GARDEN PRO PG.50	EARTHPRO RADIAL PG.60								
	520/70_30				EARTHPRO RADIAL PG.60									
	540/65_30				EARTHPRO RADIAL PG.60									

<b>32</b>	24.5_32									LOGMONSTER PG.56	EARTHPRO BIAS PG.62	DIAMOND TREAD PG.69		
	30.5_32									LOGSTOMPER EXTREME PG.56	LOGMONSTER PG.56			
	35.5_32									LOGSTOMPER EXTREME PG.56	LOGMONSTER PG.56			
	73x4400_32									LOGSTOMPER EXTREME PG.56	TERRA TURBO II PG.76			
	78x4500_32									LOGSTOMPER EX23 PG.56				
	230/95_32				350 ROWSTAR RADIAL PG.61									
	320/85_32				EARTHPRO RADIAL PG.60									
	850/50_32				RADIAL SUPER SOFTILE PG.64									

<b>33</b>	18.00_33									PORT MAX PG.40				
	35/65_33				TUL500 PG.51									
	35x65_33									LHD 500A PG.34	SUPER SEVERE MINE PG.34			
	1800_33				TUE400 PG.50					HM450E PG.40				

<b>34</b>	16.9_34				GARDEN PRO PG.50					EARTHPRO 45 PG.62	AGRI TRAC II PG.63			
	18.4_34									347 BIAS PG.63	LOGMONSTER PG.56	EARTHPRO BIAS PG.62	EARTHPRO 45 PG.62	
	380/85_34				EARTHPRO RADIAL PG.60									
	420/85_34				EARTHPRO RADIAL PG.60									
	460/85_34				EARTHPRO RADIAL PG.60					347 BIAS PG.63				
	480/70_34				EARTHPRO RADIAL PG.60									
	480/80_34				GARDEN PRO PG.50									
	520/70_34				EARTHPRO RADIAL PG.60									

Wheel Diameter	Standard Size	SOLID			Radial					Bias				
35	24.00_35				TUE402 PG.50									
	33.25_35				TUE390 PG.50									
	37.25_35				TUE390 PG.50									
36	12.4_36									EARTHPRO 45 PG.62				
	13.6_36									347 BIAS PG.63				
	320/85_36				EARTHPRO RADIAL PG.60									
	340/85_36				EARTHPRO RADIAL PG.60									
38	11.2_38									IRRIGATION BIAS PG.64				
	12.4_38									347 BIAS PG.63				
	13.6_38				EARTHPRO RADIAL PG.60					347 BIAS PG.63				
	14.9_38									347 BIAS PG.63				
	15.5_38									EARTHPRO BIAS PG.62	EARTHPRO 45 PG.62			
	16.9_38									EARTHPRO BIAS PG.62	EARTHPRO 45 PG.62			
	18.4_38									LOGMONSTER PG.56	EARTHPRO BIAS PG.62	EARTHPRO 45 PG.62		
	20.8_38									347 BIAS PG.63	LOGSTOMPER ARAMID PG.57	EARTHPRO BIAS PG.62		
	170/100_38				GARDEN PRO PG.50									
	320/85_38				EARTHPRO RADIAL PG.60					347 BIAS PG.63				
	340/85_38				EARTHPRO RADIAL PG.60									
	380/80_38				EARTHPRO RADIAL PG.60									
	420/85_38				EARTHPRO RADIAL PG.60									
	460/85_38				EARTHPRO RADIAL PG.60									
	480/70_38				EARTHPRO RADIAL PG.60									
	520/70_38				EARTHPRO RADIAL PG.60									
	520/85_38				EARTHPRO RADIAL PG.60									
	540/65_38				EARTHPRO RADIAL PG.60									
	600/65_38				EARTHPRO RADIAL PG.60									
650/65_38				EARTHPRO RADIAL PG.60										
710/70_38				EARTHPRO RADIAL PG.60										

Wheel Diameter	Standard Size	SOLID			Radial					Bias					
<b>42</b>	320/80_42				EARTHPRO RADIAL PG.60										
	320/90_42				EARTHPRO RADIAL PG.60										
	480/80_42				EARTHPRO RADIAL PG.60										
	520/85_42				EARTHPRO RADIAL PG.60										
	650/65_42				EARTHPRO RADIAL PG.60										
	710/70_42				EARTHPRO RADIAL PG.60										
<b>46</b>	320/90_46				EARTHPRO RADIAL PG.60										
	380/90_46				EARTHPRO RADIAL PG.60										
	480/80_46				EARTHPRO RADIAL PG.60										
	520/85_46				EARTHPRO RADIAL PG.60										
<b>48</b>	230/95_48				350 ROWSTAR RADIAL PG.61										
<b>50</b>	480/80_50				EARTHPRO RADIAL PG.60										
	15_625										BEEFY BABY III PG.13				
	18_625										BEEFY BABY III PG.13				
	355/55_625										BEEFY BABY III PG.13				
	445/50_710										BEEFY BABY III PG.13				
	26x12_380										BEEFY BABY III PG.13				

# **GALAXY | PRIMEX**



**Yokohama Off-Highway Tires America, Inc. (Corporate & Sales Office)**  
201 Edgewater Drive, Suite 285 | Wakefield, MA 01880  
Toll Free: (800) 343-3276 | Fax: (339) 900-8065

**[ordertires@yokohama-oht.com](mailto:ordertires@yokohama-oht.com)**  
**[www.yokohama-oht.com](http://www.yokohama-oht.com)**